

F · S · T[®]

FINE SCIENCE TOOLS



FINE SURGICAL INSTRUMENTS
FOR RESEARCH[™]

100% Satisfaction Guarantee

満足度100%への“挑戦”

FST (Fine Science Tools Inc.)社及び室町機械(株)は満足度100%を実現すべくお客様の立場に立ったサービスを心がけております。

- 実際に製品を見てから購入可能な『貸出サービス』を提供しております。
- 購入された商品に不具合がある場合、交換させていただきます。
- FST社製品の『研磨・修理サービス』も行っております。
(ピンセットは研磨・修理しましても元の状態に戻すことは難しいため、買い替えをお薦めしております)

本カタログ記載の器具は全て動物実験用であり 臨床用にはご使用になれません。

F · S · T
FINE SCIENCE TOOLS

Muromachi

在庫検索はこちらから



Letter from the Managing Partner

Dear Customers,

After my uncle and founder of Fine Science Tools, Hans, handed over the management of the company to my cousin Rob and I last year, a lot has happened. Coming to FST as an “outsider”, my primary goal was to learn everything about the products, customers and the entire company. From my very first day, I learned just how much my uncle Hans and the excellent managerial team, Rob, Michael and Christina were able to grow the company over the last 45 years from a single office in Vancouver into a global enterprise, a tremendous achievement that they should be proud of. Through excellent customer service, impeccable product quality and a passionate team, FST has become a household name in surgical and microsurgical instruments and accessories.

During the COVID19 pandemic and the following worldwide lockdown, whether at their home office or on-site, our teams around the world were able to provide our customers with the instruments and accessories they needed. Under challenging circumstances, we kept our warehouses open in order to ship products to research laboratories, biotech’s and academic institutions around the world while our support staff actively continued to provide assistance to all customer questions and inquiries.

I would like to thank my colleagues, our suppliers and our customers – who have stuck with us over the years and especially, over the last few months. I am looking forward to our continued cooperation as well as a successful and healthy future for all of us.

Sincerely,



Markus Gawenda,
Managing Partner



Rob Gawenda
President



Michael Dosch
Chief Executive Officer



Christina Callanta
Chief of Operations

Please note the following information for your safety.

All surgical instruments and devices from the Fine Science Tools product range are intended exclusively for use in experimental research laboratories and facilities or in veterinary medicine. Our Customer Support is available to answer any questions you may have about the field of application and the material properties.



Scissors	3 – 35
Spring	3 – 14
Fine	15 – 28
Surgical	29 – 35
Bone Instruments	36 – 49
Rongeurs	36 – 38
Cutters	39 – 47
Other Bone Instruments	47 – 48
Curettes & Chisels	49
Scalpels & Knives	50 – 61



Forceps	63 – 91
Dumont	63 – 73
Fine	72 – 80
Moria	74
S&T	75, 77
Standard	81 – 91
Hemostats	92 – 97



Probes & Hooks	99 – 103
Spatulae	102 – 105
Hippocampal Tools & Spoons	106 – 107
Pins & Holders	108 – 109
Wound Closure	110 – 121
Needle Holders & Suture	110 – 118
Staplers, Clips & Applicators	119 – 121
Retractors	122 – 129
Vascular Instruments	130 – 139
Clamps & Occluders	130 – 134
Ligation Aids	135
Dilation & Cannulation	136 – 139



Animal Accessories	141 – 143
Feeding Needles	141
Animal Identification	142 – 143
Instrument Care & Accessories	144 – 155
Hot Bead Sterilizer	149
Instrument Cases	152 – 155
Surgical Accessories	156 – 159
Drill Accessories	157
Cauterizers	158
Laboratory Accessories	160 – 171
Tools	160 – 165
Magnifiers & Lens Paper	166 – 171



Student Quality Instruments	173 – 179
Quality instruments with the student in mind	
Scissors	173 – 174
Cutter	174
Vessel Dilator	175
Forceps	175 – 177
Hemostat, Needle Holder, Pin Holder, Scalpel Handle & Retractor	178 – 179



Reference Pages	181 – 200
Worldwide Locations	181
Scissors Test	182
Features and Alloys	183
Maintenance and Care	184 – 185
Quality Control	186
Student Line	187
Selection	188
Dumont	189
Numerical and Alphabetical Indexes	190 – 199
Additional Information	200



Scissors, Bone Instruments & Scalpels

Spring Scissors	Pages	3 – 14
Fine Scissors	Pages	15 – 28
Surgical Scissors	Pages	29 – 35
Bone Instruments	Pages	36 – 49
Scalpels & Knives	Pages	50 – 61



These Vannas-style spring scissors have the smallest blades ever produced. They are ideal where space is restricted and where absolute precision is demanded.

The short taper is ideal for small, precise cuts.



200%



250%

Cutting edge: 2 mm
Tip diameter: 0.05 mm
8 cm

Cutting edge: 2.5 mm
Tip diameter: 0.05 mm
8 cm

- 
Straight
No. 15000-03
- 
Curved
No. 15000-04

- 
Straight
No. 15000-08
- 
Curved
No. 15001-08
- 
Angled to side
No. 15002-08

MOST
POPULAR

The long taper is ideal for cutting vessel walls or when a longer cutting edge is needed.



300%

Cutting edge: 3 mm
Tip diameter: 0.05 mm
8 cm



Straight

No. 15000-00



Curved

No. 15000-10

**MOST
POPULAR**

Vannas



Cutting edge: 4 mm
Tip diameter: 0.15 mm
10.5 cm



Straight

No. 15018-10



Curved

No. 15019-10

Vannas-Tübingen



Cutting edge: 5 mm
Tip diameter: 0.075 mm



Straight
8.5 cm

No. 15003-08



Angled to side
8.5 cm

No. 15008-08

**MOST
POPULAR**



Curved
8.5 cm

No. 15004-08



Angled up
9.5 cm

No. 15005-08

Vannas Scissors with Microserrations

Microserrated to minimize slippage.



Tip diameter: 0.1 mm



Straight

Cutting edge: 4 mm
8.5 cm
No. 15070-08



Curved

Cutting edge: 4 mm
8.5 cm
No. 15071-08

Cutting edge: 5 mm
9 cm
No. 15007-08

Miniature Vannas

Hand finished under high magnification, these tips are especially useful when incising vessel walls for catheter insertion.



Cutting edge: 5 mm
Tip diameter: 0.1 mm
8 cm



Straight

Moria 9600
No. 15396-00



Curved

Moria 9601
No. 15396-01

Titanium Vannas



•TITANIUM•

For more information
see page 183.

Cutting edge: 5 mm
Tip diameter: 0.3 mm
9.5 cm



Straight

No. 15610-08



Curved

No. 15615-08



Angled up

No. 15617-08

Cohan-Vannas

Long cutting blades for
a more controlled cut.



Cutting edge: 6 mm
Tip diameter: 0.1 mm
6 cm



Straight

Sharp/Sharp
No. 15000-02

Blunt/Blunt
No. 15000-12



Curved

Sharp/Sharp
No. 15000-01

Blunt/Blunt
No. 15000-11

ToughCut® Spring Scissors



TOUGH
CUT

For more information
see page 183.

Cutting edge: 6 mm
Tip diameter: 0.3 mm
12.5 cm



Straight

No. 15124-12



Curved

No. 15123-12

Round Handled Vannas

Round handles allow easy fingertip adjustments.



Cutting edge: 6 mm
Tip diameter: 0.075 mm
12.5 cm




Straight

No. 15400-12




Curved

No. 15401-12

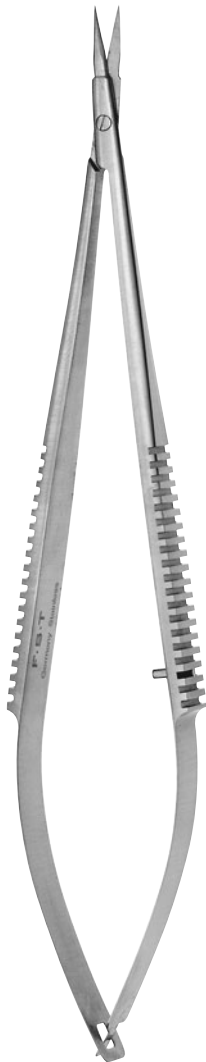

Cutting edge: 6 mm
Tip diameter: 0.15 mm
14 cm



Straight

No. 15020-15



Curved


No. 15021-15

Ceramic Coated Spring Scissors



For more information about our ceramic instruments please visit page 183

Cutting edge: 7 mm
Tip diameter: 0.1 mm
10 cm



Straight

No. 15750-11



Curved

No. 15751-11

Vannas-Wolff

Ultra long cutting edge
without sacrificing tip width.



Cutting edge: 7 mm
Tip diameter: 0.15 mm
10 cm



Straight



Curved

Moria MC52
No. 15370-52

Moria MC50
No. 15370-50



Cutting edge: 8 mm
Tip diameter: 0.1 mm
8.5 cm



Straight

No. 15009-08



Cutting edge: 10 mm
Tip diameter: 0.125 mm
10 cm



Angled

No. 15006-09

Same as No. 15006-09 but with a ball tip to prevent piercing of underlying tissue.



Cutting edge: 8 mm
Tip diameter: 1.3 mm Ball
9 cm



Angled

No. 15033-09



Cutting edge: 8 mm
Tip diameter: 0.15 mm
10 cm



Straight
Sharp/Sharp

No. 15024-10



Straight
Blunt/Blunt

No. 15025-10



Curved
Sharp/Sharp

No. 15023-10




Cutting edge: 10 mm
Tip diameter: 0.1 mm
11.5 cm



Straight

No. 15040-11



Angled up

No. 15042-11

Dowell

Noyes



Cutting edge: 14 mm
Tip diameter: 0.2 mm
12 cm




Straight

No. 15012-12



Curved

No. 15011-12



Angled up

No. 15013-12

Tungsten Carbide Noyes

Tungsten carbide cutting edges provide long lasting sharpness.



**TUNGSTEN
CARBIDE**

For more information
see page 183.

Tungsten Carbide Cutting Edges

Cutting edge: 14 mm
Tip diameter: 0.275 mm
12 cm



Straight

No. 15514-12

Castroviejo



Cutting edge: 10 mm
Tip diameter: 0.2 mm
10 cm



Sharply curved

No. 15017-10

Ceramic Coated Titanium Castroviejo



•TITANIUM•

For more information
see page 183.

For more information about
our ceramic instruments
please visit page 183

Cutting edge: 5 mm
Tip diameter: 0.2 mm
11 cm



Straight

No. 15650-11



Curved

No. 15651-11

Westcott



Cutting edge: 15 mm
Tip diameter: 0.25 mm
11 cm



Slightly curved

No. 15015-11

Fine Angled Spring Scissors

These spring scissors aid in cutting
tissues from various angles.



Angled
Cutting edge: 2 mm
Tip diameter: 0.1 mm
9.5 cm

No. 15010-09



Angled
Cutting edge: 4 mm
Tip diameter: 0.125 mm
10 cm

No. 15010-10

Trident II

A re-release of a popular spring scissors now with a new innovative design for a better feel.



Cutting edge: 8 mm
Tip diameter: 0.2 mm
8 cm



Straight



Angled

No. 15110-08


No. 15111-08

Pascheff-Wolff

Very delicate blades.



Cutting edge: 3 mm
Tip diameter: 0.15 mm
10.5 cm



Angled

Moria MC19/B
No. 15371-92

Cutting edge: 5 mm
Tip diameter: 0.2 mm
18.5 cm



Straight



Curved

No. 15028-18

No. 15027-18



Vitreotomy Scissors

The finest blades on spring scissors. Designed for ophthalmic surgery (vitrectomy). The spring handles are made of ribbed plastic to ensure a solid grip. **Autoclavable.**



Cutting edge: 2.5 mm
Tip diameter: 0.175 mm
14.5 cm



200% of
actual size

Straight
Microserrations to
minimize slippage.

No. 15030-14



200% of
actual size

Angled to side

No. 15031-14



14 cm



200% of
actual size

Straight
Cutting edge: 2.2 mm
Tip diameter: 0.15 mm

No. 15036-14



200% of
actual size

Angled 90°
Cutting edge: 1 mm
Tip diameter: 0.1 mm

No. 15037-14

Ultra Fine Clipper Scissors II

For microscopic dissections of soft and mucous tissue. The minute fineness of the blades allows clear visualization of the tissue being dissected.



Uses:

- Removing sheath of ganglia to access neurons in aplysia.
- Cutting single nerve axons in aplysia, mollusk and snail.
- Stripping fascia off arteries and muscles.
- Ultra fine brain tissue dissection.
- Cutting of minute fiber optic strands.

Blade shape: Triangular
Blade thickness: 0.1 mm
Tip thickness: 0.05-0.08 mm
Cutting edge: 1.5-2 mm
10 cm

No. 15300-00

Biemer Scissors

These scissors are designed to securely cut vessels without slipping.



Cutting edge: 4 mm
8.5 cm


No. 15032-08

Cutting edge: 2 mm
13 cm

No. 15032-13

Extra Fine Bonn

Our finest iris scissors, best suited for microdissection under high magnification.



Straight
8.5 cm

Sharp/Sharp
No. 14084-08



Curved
8.5 cm

Sharp/Sharp
No. 14085-08

**MOST
POPULAR**


**MOST
POPULAR**



Sharp/Blunt
No. 14083-08

Bonn

Highly polished.



Straight
Sharp/Sharp
9 cm

No. 14184-09



Curved
Sharp/Sharp
9 cm

No. 14185-09

ToughCut® Bonn-Strabismus

A fusion of two light and delicate iris scissors with ToughCut cutting edges.



For more information
see page 183.

ToughCut



Straight
Blunt/Blunt
9 cm

No. 14084-09




Curved
Blunt/Blunt
9 cm

No. 14085-09

Hardened Fine Iris Scissors

These scissors have an anti-reflective finish to reduce glare.



Straight
Sharp/Sharp

9 cm
No. 14090-09

**MOST
POPULAR**

11 cm
No. 14090-11



Curved
Sharp/Sharp

9 cm
No. 14091-09

11 cm
No. 14091-11


Fine Iris Scissors

Made from Martensitic stainless steel, combined with Molybdenum and Vanadium.



Straight
Sharp/Sharp
10.5 cm

No. 14094-11



Curved
Sharp/Sharp
10.5 cm

No. 14095-11

Delicate pattern.




Straight
Sharp/Sharp

9 cm
No. 14060-09

10.5 cm
No. 14060-10

11.5 cm
No. 14060-11




Curved
Sharp/Sharp

9 cm
No. 14061-09

10.5 cm
No. 14061-10


11.5 cm
No. 14061-11



Curved to side
Sharp/Sharp

9 cm
No. 14062-09

10.5 cm
No. 14062-10



Angled to side
Sharp/Sharp

9 cm
No. 14063-09

11.5 cm
No. 14063-11



Straight
Sharp/Sharp

**LEFT
HANDED**
10.5 cm

No. 14160-10



Curved
Sharp/Sharp

**LEFT
HANDED**
10.5 cm

No. 14161-10

**MOST
POPULAR**

Extra narrow, delicate pattern. Very slim blades with gentle cutting action.




Moria



Straight
Sharp/Sharp
10.5 cm

Moria 4877
No. 14370-22



Shallow curve
Sharp/Sharp
10.5 cm

Moria 4878
No. 14370-23



Side-view showing
extra narrow pattern

Straight
Sharp/Sharp
10.5 cm

**MOST
POPULAR**


No. 14088-10

Wagner



Straight
Sharp/Sharp
Large finger loops
10 cm

No. 14040-10



Curved
Sharp/Sharp
Large finger loops
10 cm

No. 14041-10



Straight
Sharp/Sharp
Non-serrated
12 cm

No. 14068-12




Curved
Sharp/Sharp
Non-serrated
12 cm

No. 14069-12



Straight
Sharp/Sharp
Serrated
12 cm

No. 14070-12



Curved
Sharp/Sharp
Serrated
12 cm

No. 14071-12

ToughCut®



For more information
see page 183.

ToughCut



Straight
Sharp/Sharp

9 cm
No. 14058-09

**MOST
POPULAR**



Curved
Sharp/Sharp

9 cm
No. 14059-09

11.5 cm
No. 14058-11

**MOST
POPULAR**

11.5 cm
No. 14059-11

Tungsten Carbide



For more information
see page 183.

Tungsten Carbide Cutting Edges



Straight
Sharp/Sharp

9 cm
No. 14568-09

**MOST
POPULAR**



Curved
Sharp/Sharp

9 cm
No. 14569-09

11.5 cm
No. 14568-12

**MOST
POPULAR**

11.5 cm
No. 14569-12

ToughCut® and Tungsten Carbide

For more information
see page 183.



For more information
see page 183.



ToughCut and Tungsten Carbide Cutting Edges



Straight
Sharp/Sharp

9 cm
No. 14558-09

11.5 cm
No. 14558-11



Curved
Sharp/Sharp

9 cm
No. 14559-09

11.5 cm
No. 14559-11

CeramaCut®

These ceramic-coated scissors are the cleanest cutting, longest lasting scissors ever produced. Utilizing the unique properties of a ceramic coating, they will last six times longer than tungsten carbide instruments and cut even better than ToughCut® scissors. The black, corrosion-resistant coating has a non-glare finish.



For more information
see page 183.



CeramaCut



Straight
Sharp/Sharp

9 cm
No. 14958-09

11.5 cm
No. 14958-11



Curved
Sharp/Sharp


9 cm
No. 14959-09

11.5 cm
No. 14959-11



Straight
Sharp/Blunt
10 cm

No. 14028-10



Curved
Sharp/Blunt
10 cm

No. 14029-10

Lexer-Baby



Straight
Blunt/Blunt
10 cm

No. 14078-10



Curved
Blunt/Blunt
10 cm


No. 14079-10

Strabismus

Straight
Blunt/Blunt

9 cm
No. 14074-09

11.5 cm
No. 14074-11



Curved
Blunt/Blunt

9 cm
No. 14075-09

11.5 cm
No. 14075-11

Tungsten Carbide Strabismus

**TUNGSTEN
CARBIDE**

For more information
see page 183.


Tungsten Carbide Cutting Edges



Straight
Blunt/Blunt

9 cm
No. 14574-09

11 cm
No. 14574-11



Curved
Blunt/Blunt

9 cm
No. 14575-09

11 cm
No. 14575-11

Walton



Slightly curved
Sharp/Sharp

9.5 cm
No. 14077-09

10.5 cm
No. 14077-10

Stevens Tenotomy




Straight
Sharp/Sharp
11 cm

No. 14064-11




Straight
Blunt/Blunt
11 cm

No. 14066-11



Curved
Sharp/Sharp
11 cm

No. 14065-11



Curved
Blunt/Blunt
11 cm

No. 14067-11

LaGrange

One edge is serrated to minimize slippage of tissue during cutting. Curved handle helps when cutting from an awkward angle.



Side View



Curved
Sharp/Sharp
11.5 cm

No. 14173-12

Shea

Transplant scissors with light and delicate pattern.



Curved
Blunt/Blunt
12 cm

No. 14105-12

Dissector Scissors

Slim blades for cutting tissue.



Angled to side
Sharp/Sharp
Cutting edge: 8 mm
10 cm

No. 14081-09

Similar to 14081-09, but with stronger blades for cutting fine bone.



Angled to side
Sharp/Sharp
Cutting edge: 12 mm
10.5 cm

No. 14082-09

Spencer Ligature

Used for cutting stitches or suture.



Sharp/Sharp
9 cm

No. 14076-09

Bonn Artery

Iris scissors with one ball tip to prevent piercing of underlying tissue.



Delicate

Sharp/1.5 mm Ball
9 cm

No. 14086-09



Sharp/1.5 mm Ball
11.5 cm


No. 14080-11

Tissue Separating Scissors

Blunt/Blunt
11.5 cm

No. 14072-10

See page 8 for artery-style spring scissors.




Sharply angled up
Sharp/Sharp
10.5 cm

No. 14037-10

The finger loops can be
enlarged to fit almost any size.



Straight
Large finger loops
9.5 cm



Sharp/Sharp
No. 14106-09



Blunt/Blunt
No. 14108-09



Gently curved
Blunt/Blunt
Serrated
Large finger loops
10.5 cm

No. 14171-10

Kaye

These scissors have semi-sharp outer
edges to better facilitate dissection.

Standard Pattern

Our standard surgical scissors are recognized for these important features:

- Excellent feel and handling capability.
- Overall execution that marks them as fine examples of German craftsmanship.






Length (cm)	Straight Sharp/Sharp	Straight Sharp/Blunt	Straight Blunt/Blunt
12	No. 14002-12	No. 14001-12	No. 14000-12
13	No. 14002-13	No. 14001-13	No. 14000-13
14.5	No. 14002-14	No. 14001-14*	No. 14000-14
16.5	No. 14002-16	No. 14001-16	No. 14000-16
18.5		No. 14001-18	No. 14000-18
20			No. 14000-20

MOST POPULAR

* Left-handed version also available.



No. 14008-14



Length (cm)	Curved Sharp/Sharp	Curved Sharp/Blunt	Curved Blunt/Blunt
12	No. 14005-12	No. 14004-12	No. 14003-12
13	No. 14005-13	No. 14004-13	No. 14003-13
14.5	No. 14005-14	No. 14004-14	No. 14003-14
16.5	No. 14005-16	No. 14004-16	No. 14003-16
18.5		No. 14004-18	No. 14003-18
20			No. 14003-20

ToughCut® Standard Pattern



80% of
actual size



For more information
see page 183.

ToughCut



Straight
Sharp/Blunt

13 cm
No. 14054-13

**MOST
POPULAR**

17.5 cm
No. 14130-17

Tungsten Carbide Standard Pattern



80% of
actual size



For more information
see page 183.

Tungsten Carbide Cutting Edges



Straight
Sharp/Sharp
14.5 cm

No. 14502-14




Straight
Sharp/Blunt
14.5 cm

No. 14501-14



Curved
Sharp/Sharp
14.5 cm

No. 14505-14



Curved
Sharp/Blunt
14.5 cm

No. 14504-14

Standard Pattern with Serrations



80% of
actual size

Straight
Sharp/Blunt
Serrated
14 cm

No. 14007-14

Standard Pattern with Large Finger Loops



Straight
Sharp/Blunt
Large finger loops
14.5 cm

No. 14101-14

Tungsten Carbide Mini-Lister



Tungsten Carbide Cutting Edges

Angled to side
Blunt/Blunt
Smooth
9 cm

No. 14531-09

Lister

Excellent skin cutting scissors. Longer, blunt blade prevents damaging tissue underneath skin without losing the cutting line.



Angled to side
Blunt/Blunt
Serrated
14 cm

No. 14131-14

Metzenbaum Baby



Straight
Blunt/Blunt

13 cm
No. 14018-13

14.5 cm
No. 14018-14

18 cm
No. 14018-18



Curved
Blunt/Blunt

13 cm
No. 14019-13

14.5 cm
No. 14019-14

18 cm
No. 14019-18

Tungsten Carbide Metzenbaum Fino



**TUNGSTEN
CARBIDE**

For more information
see page 183.

Tungsten Carbide Cutting Edges



Straight
Blunt/Blunt
Ultra fine tips

14.5 cm
No. 14508-15



Straight
Blunt/Blunt

14.5 cm
No. 14518-14

18 cm
No. 14518-18



Curved
Blunt/Blunt
Ultra fine tips

14.5 cm
No. 14509-15




Curved
Blunt/Blunt

14.5 cm
No. 14519-14

18 cm
No. 14519-18

Metzenbaum



Straight
Sharp/Blunt

14.5 cm
No. 14024-14



Straight
Blunt/Blunt

14.5 cm
No. 14016-14



Curved
Blunt/Blunt

14.5 cm
No. 14017-14

18 cm
No. 14016-18

18 cm
No. 14017-18

ToughCut® Metzenbaum



For more information
see page 183.

ToughCut



Straight
Blunt/Blunt

14.5 cm
No. 14116-14

18 cm
No. 14116-18



Curved
Blunt/Blunt

14.5 cm
No. 14117-14

18 cm
No. 14117-18

Mayo

ToughCut® Mayo

Tungsten Carbide Mayo



For more information
see page 183.



For more information
see page 183.



ToughCut

Tungsten Carbide Cutting Edges



Straight
Blunt/Blunt

15 cm
No. 14010-15

17 cm
No. 14010-17



Curved
Blunt/Blunt

15 cm
No. 14011-15

17 cm
No. 14011-17



Straight
Blunt/Blunt

15 cm
No. 14110-15

17 cm
No. 14110-17



Curved
Blunt/Blunt

15 cm
No. 14111-15

17 cm
No. 14111-17



Straight
Blunt/Blunt

15 cm
No. 14510-15

17 cm
No. 14510-17



Curved
Blunt/Blunt

15 cm
No. 14511-15

17 cm
No. 14511-17



Straight
Blunt/Blunt
ToughCut

15 cm
No. 14512-15

17 cm
No. 14512-17

Mayo-Stille



Straight
Blunt/Blunt

15 cm
No. 14012-15



Curved
Blunt/Blunt

15 cm
No. 14013-15

17 cm
No. 14012-17

17 cm
No. 14013-17

Mayo-Noble



Straight
Blunt/Blunt

16.5 cm
No. 14014-17



Curved
Blunt/Blunt

16.5 cm
No. 14015-17

Decapitation Scissors

Stop guard at tips to prevent slippage.



80% of
actual size




Straight
Blunt/Blunt

21 cm
No. 14200-21

Friedman-Pearson

This popular, fine-tipped rongeur is suited for delicate work. The fine-cupped jaws have been designed with a longer and slimmer approach for better visibility. Handmade in our Heidelberg, Germany workshop.

**MOST
POPULAR**

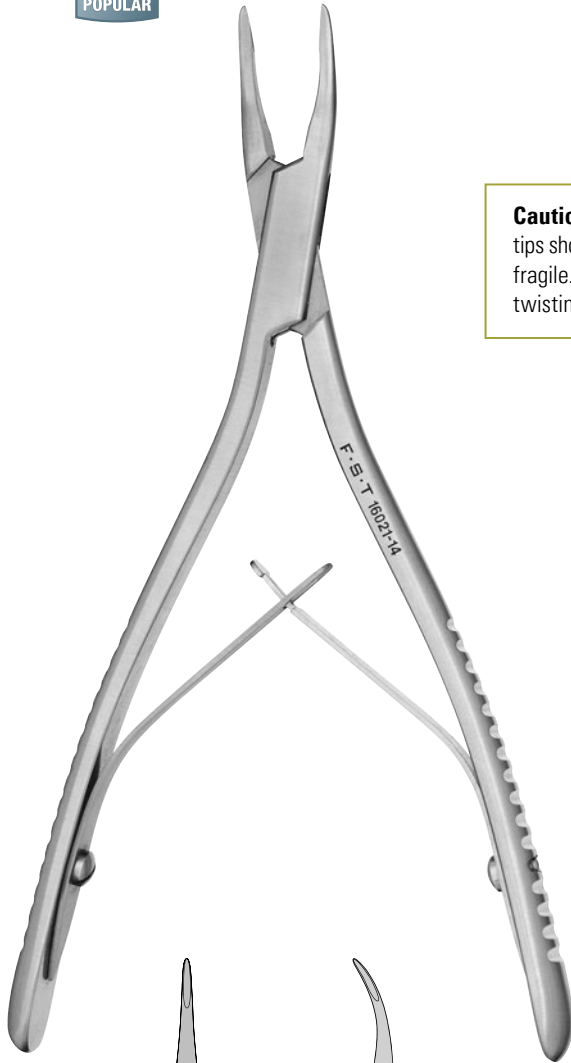

Straight
14 cm

0.5 mm Cup
No. 16220-14

0.7 mm Cup
No. 16120-14

1 mm Cup
No. 16020-14

Curved
14 cm

0.5 mm Cup
No. 16221-14


0.7 mm Cup
No. 16121-14

1 mm Cup
No. 16021-14

Cautionary note: The fine rongeur tips shown on this page are extremely fragile. Removal of material with a twisting motion can damage the tips.

Pearson

Provides excellent visibility at dissection site due to its extra long and narrow approach to the fine cutting jaws. Especially suitable for larger hands. Handmade in our Heidelberg, Germany workshop.

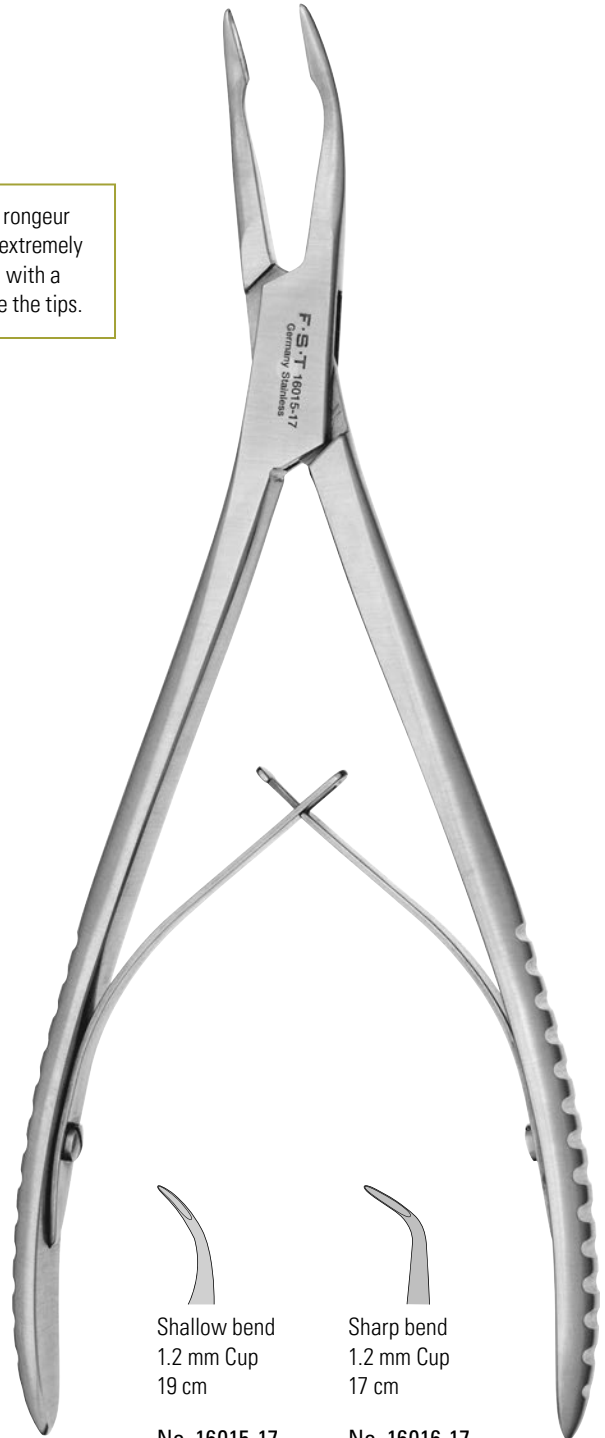

Shallow bend
1.2 mm Cup
19 cm


No. 16015-17

Sharp bend
1.2 mm Cup
17 cm

No. 16016-17


Baby-Beyer

Double-action rongeur with strong jaws helps relieve hand strain.



Straight
2 mm Cup
15 cm

No. 16023-15



Curved
2 mm Cup
15 cm

No. 16022-15




Diameter of this circle determines cup size.

Form an imaginary circle that will fit in the very tip of the instrument and measure its diameter.

Beyer

Double-action rongeur with strong jaws helps relieve hand strain.




Curved
2.5 mm Cup
18 cm

No. 16002-18

Friedman


Strong and large jaws are ideal for use on the harder, outer regions of the spinal cord. Also can be used to gain access to delicate structures encased in bone.

60% of
actual size

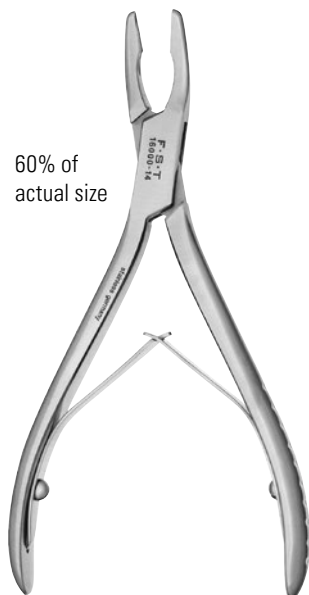

Diameter of this circle determines cup size.

Form an imaginary circle that will fit in the very tip of the instrument and measure its diameter.




Curved
2.5 mm Cup
13 cm

No. 16000-14

Lempert


Extra fine jaws.

60% of
actual size

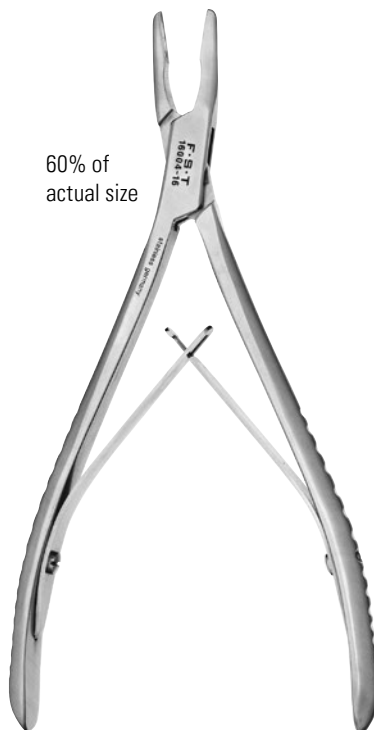

Straight
2.5 mm Cup
16 cm

No. 16004-16




Curved
2.5 mm Cup
16 cm

No. 16005-16

Luer

60% of
actual size



Curved
4 mm Cup
15 cm

No. 16001-15

Bone Trimmers

Curved
Cutting edge: 8 mm
14 cm

No. 16109-14

Cartilage Cutter

Round cutting blades for tissue, cartilage and soft bone.



Curved
Cutting edge: 9 mm
14 cm


No. 16107-14

Dumont #15a Bone Cutter

Cutting edge on both outside and inside bevel. Cuts suture, cartilage, bone and steel wire to 0.06 mm, and copper wire to 0.15 mm. **Not autoclavable.**



Hard carbon steel



Cutting edge: 10 mm
Jaw opening: 2.5 mm
Hard carbon steel
11.5 cm

No. 11215-01

**Dumont #15a Bone Cutter
Epoxy Coated**

Same structure and functionality as Item No. 11215-01 (left), but with an epoxy coating up to the cutting edge for easier care and maintenance. **Not autoclavable.**




Cutting edge: 6 mm
Jaw opening: 2.5 mm
Epoxy coated carbon steel
11.5 cm

No. 11215-02

Tungsten Carbide Bone Cutter

**TUNGSTEN
CARBIDE**

For more information
see page 183.



Angled
Cutting edge: 10 mm
Stainless Steel handle with
Tungsten Carbide Tips
11.5 cm

No. 11515-02

**NEW
ITEM**

Micro Bone Cutter

Angled 25°
Cutting edge: 5 mm
Rolling Bearing Steel handle with TPE Grip
13 cm

No. 16103-11

**NEW
ITEM**


Bone Forceps

Strong cross-serrated tips for
bone crushing and removal.



Angled
Cross serrated
Tip diameter: 1 mm
11.5 cm

No. 16060-11

Bone Nipper

Angled
Cutting edge: 5 mm
11 cm

No. 16102-11


Offset Bone Nipper

Strong jaws for cutting
tough cartilage.




Angled
Cutting edge: 7 mm
10 cm

No. 16101-10

Malleus Nipper


Straight
Serrated
Cutting edge: 9 mm
11 cm

No. 16140-11



Angled down
Serrated
Cutting edge: 9 mm
11 cm

No. 16141-11



Angled up
Serrated
Cutting edge: 9 mm
11 cm

No. 16142-11


**Bone Cutting
Spring Scissors**

Straight
Cutting edge: 12 mm
13 cm

No. 16144-13

**Delicate Bone Cutting
Spring Scissors**

Slim, strong blades for cutting
fine bones and tissues.

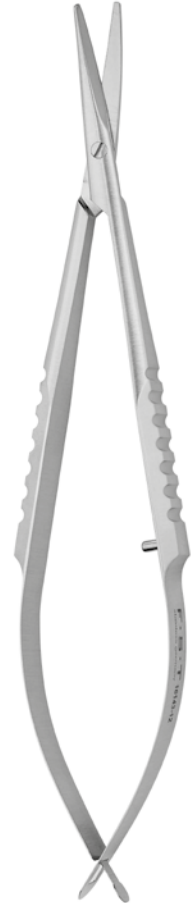

Curved
Cutting edge: 12 mm
12 cm

No. 16143-12

Littauer Bone Cutter

Cutting edge: 15 mm
11 cm
No. 16152-11

Cutting edge: 17 mm
12.5 cm
No. 16152-12

Cutting edge: 19 mm
15 cm
No. 16152-15

Beebee Bone Scissors

Very strong jaws with sharp points.



**MOST
POPULAR**

Straight
Cutting edge: 15 mm
10 cm

No. 16044-10

Tungsten Carbide Bone Scissors

Strong heavy blades for cutting bone.



**TUNGSTEN
CARBIDE**

For more information
see page 183.

Tungsten Carbide Cutting Edges

Straight
Cutting edge: 15 mm
12.5 cm


No. 16030-12

Straight
Cutting edge: 15 mm
16 cm

No. 16030-16

Boehler

Bone splitting cutter with very fine tips and double action joint to relieve strain on your hand.



Angled up 10°
Cutting edge: 18 mm
15 cm

No. 16130-15

Skull Flap Cutter

One tip has a flat and narrow platform which fits between dura and skull. Other tip has sharp cutting edge.



Angled up 15°
Cutting edge: 10 mm
14 cm

No. 16050-15

Cleveland Cutter**Liston**

Gross anatomy bone cutter.



Slightly angled

Cutting edge: 14 mm

15 cm

No. 16106-14

Cutting edge: 15 mm

17 cm

No. 16105-16



Straight

Cutting edge: 20 mm

14 cm

No. 16104-14

Cutting edge: 30 mm

20 cm

No. 16104-19

Bone Shears


75% of actual size

Cutting edge: 6.5 cm
24 cm

No. 16150-24

Bone Pliers

To peel back skull flaps.

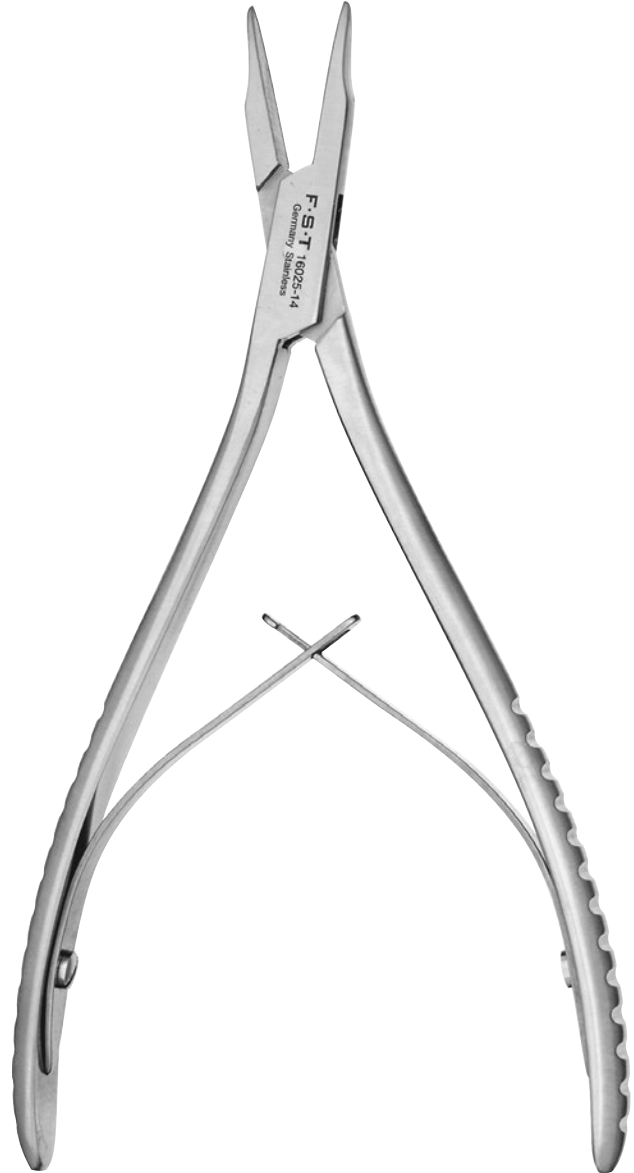

Flat surface
15.5 cm

No. 16025-14

Self-Holding Pin and Bone Screw Forceps

Designed with a serrated tip and grooved cup for a stable and secure grip, these forceps hold pins and screws allowing precise placement at your target area. They are compatible with all Fine Science Tools insect pins, minuten pins and bone screws.



Polished stainless steel
14 cm

No. 26100-00



Miniature Self-Tapping Bone Screws

Used extensively to anchor dental cement to bone, these self-tapping screws have superior holding strength over ordinary machine screws. Stainless steel with fillister flat head.

Shaft diameter: 0.86 mm
Length: 4 mm

Pkg. of 100 screws
No. 19010-10

For pre-drilling use our 0.7 mm burs,
see page 157.

Shaft diameter: 1.19 mm
Length: 4.8 mm

Pkg. of 100 screws
No. 19010-00

For pre-drilling use our 0.9 mm burs,
see page 157.

Bone Wax

A beeswax-based compound for bone hemostasis. Soft, kneadable and ready to use. **Sterile.**



Box of 12 foil packs (2.5 g each)
No. 19009-00

Micro Curette


Curette tips consist of a scoop with sharp edges and are used for scraping or cleaning. They can also be used for separating and transporting, inoculating plates or transferring small amounts of chemicals.

**Delicate Bone Scraper**


For scraping tissue without cutting into bone.

**Austin Chisel****Dissecting Chisel**


Serrations on
cutting edge




No. 10080-05




No. 10081-10




No. 10082-15




No. 10083-20




No. 10075-16



No. 10096-16




No. 10097-16



No. 10095-12

Von Graefe Knife

Used for cutting dura.



Angled 90°
Cutting edge: 1.5 mm
13 cm


No. 10059-13

Cataract Knife

One of the most popular dissecting knives with a microfine point. The cutting edge is lance shaped to provide the ideal cutting angle.




Cutting edge: 4 mm
12.5 cm




Straight

No. 10055-12



Angled 30°


No. 10056-12

Sichel

Cutting edge: 9 mm
12 cm

No. 10073-14

Von Graefe Knife




Cutting edge: 28 mm
13 cm

No. 10370-13



200%



Side blade 20°
Cutting edge: 2 mm
15 cm


No. 10058-15

Circle Knife

Sharp cutting edge around tip.



250%



Angled 90°
Cutting edge: 2 mm
16 cm

No. 10059-15

Ceramic Blades

Advantages:

- Ceramic edge stays sharp 100 times longer than steel edge
- Rust and corrosion free
- Chemical and acid resistant
- Withstands up to 2400°C (4352°F)
- No electrostatic discharge concerns
- No trace metal contamination
- Fully nonmagnetic
- **Autoclavable**



Ceramic Blade

45° Cutting Edge
Cutting edge: 8 mm
33 x 6 x 0.5 mm

Pkg. of 5 blades
No. 10025-45

Aluminum Alloyed Handle

12.5 cm
No. 10025-50

Diamond Knives

This knife has a gem-quality, neutral diamond blade which is honed to the finest cutting edge possible. The blade is made to an ophthalmic surgical standard and is inspected under 400x magnification. The retractable handle aids in care and storage.

Cautionary note:

This blade is extremely fragile and vulnerable to lateral pressure.



Tip thickness: 0.15 mm
Cutting edge: 1 mm
12 cm

Grip slides up the handle to protect the tip for safe storage and packing.



Cutting angle: 30°
No. 10100-30



Cutting angle: 45°
No. 10100-45

Obsidian Stone Age Scalpels

For applications where extremely fine cuts are required or for studies where trace metals from ordinary scalpel blades cannot be tolerated. These ultra fine cutting edges have been used in human surgical procedures where objectionable scar tissue results from the use of standard scalpels.

The blade is made from obsidian—a type of volcanic glass—which allows a much finer blade than is possible with the conventional steel blade. In some cases this makes the relatively inexpensive obsidian scalpel a suitable substitute for an expensive diamond knife.

Patterned after “stone age” knives which first made their appearance about 18,000 years ago, these modern versions utilize hard wood and plastic dowels for handles. Plastic dowels are made of polyoxymethylene.

Cautionary note:

Obsidian is a very fragile material. Great care should be taken to not exert any lateral pressure on the blade during cutting. Each blade is hand-fashioned, so sizes, shapes and points will vary. While all the blades will have at least one sharp edge, some will have two.




150%

Wood Dowel
Straight
Not autoclavable

Approximate blade length: 6 mm
No. 10110-01


Approximate blade length: 12 mm
No. 10110-03



150%

Plastic Dowel
Approximate blade length: 6 mm
Autoclavable

Straight
No. 10110-05



150%

Plastic Dowel
Approximate blade length: 6 mm
Autoclavable

Angled
No. 10110-07

Gross Anatomy Knives

Handles are made of fiberglass reinforced yellow nylon with a slip resistant surface that allows little chance of bacterial accumulation. The blades are made of German Molybdenum Stainless Steel.

40% of
actual size



Dissection knife

Cutting edge: 13 cm
28 cm
No. 10157-13

Cutting edge: 15 cm
30 cm
No. 10157-15

Cutting edge: 18 cm
33 cm
No. 10157-18

40% of
actual size



Brain sectioning knife

Cutting edge: 30 cm
45 cm
No. 10152-30

Blade Holders and Breakers



Flat surface

Jaw width: 4 mm
11 cm
No. 10052-11



Surface with concave
and convex jaws
Jaw width: 4 mm

Handle diameter: 5.5 mm
9 cm
No. 10053-09

Handle diameter: 8 mm
13 cm
No. 10053-13

Breakable Carbon Steel Blades

These special, high carbon content blades are the only blades that will break cleanly.

Not autoclavable.




Blade thickness: 0.1 mm


Box of 10 blades
No. 10050-00

Create Your Own Blade

With these blade holders/breakers and our special carbon steel blades, No. 10050-00, you can produce microblades in sizes that meet your own individual needs.

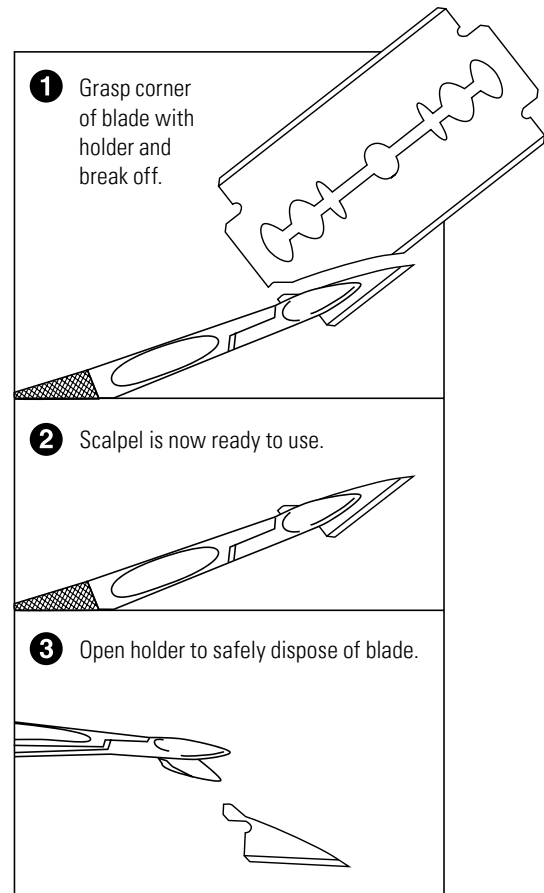

Cold forged from carbon steel and sharpened to eliminate tissue distortion and blade drag. 12.5 cm plastic handle with slip-proof grip. **Sterile.**



Cutting angle: 22.5°
Tip thickness: 0.15 mm
Cutting edge: 4.5 mm
13.5 cm

No. 10316-14


**MOST
POPULAR**



Cutting angle: 15°
Tip thickness: 0.15 mm
Cutting edge: 5 mm
13 cm

No. 10315-12

**MOST
POPULAR**



Crescent blade
Tip thickness: 0.20 mm
Cutting edge: 11 mm
14 cm

No. 10317-14



Needle blade
Tip thickness: 0.20 mm
Cutting edge: 4 mm
14.5 cm

No. 10318-14

Interchangeable Carbon Steel Blades

Not autoclavable.



Handle for
Interchangeable
Blades

9.5 cm
No. 10035-00

12.5 cm
No. 10035-12



Angled blade
Carbon steel
Cutting edge: 10 mm

Pkg. of 5 blades
No. 10035-15



Curved blade
Carbon steel
Cutting edge: 10 mm

Pkg. of 5 blades
No. 10035-20



Small flat blade
Carbon steel
Cutting edge: 1.5 mm

Pkg. of 5 blades
No. 10035-05



Large flat blade
Carbon steel
Cutting edge: 2.75 mm

Pkg. of 5 blades
No. 10035-10



Cane blade
Carbon steel
Cutting edge: 12 mm

Pkg. of 5 blades
No. 10035-25



Arc blade
Carbon steel
Cutting edge: 12 mm

Pkg. of 5 blades
No. 10035-30

Scalpel with Plastic Handle #4

For heavy, gross anatomy work.
Molded to fit hand.



#4 Plastic
13.5 cm

No. 10008-13

Standard Scalpel Handle #4 Solid

Especially suitable for large
dissections.



#4 Solid
13 cm

No. 10004-13

Blades for #4 Scalpel Handle

The alloy used has a high carbon content
which provides a longer lasting edge. Blades
come individually wrapped. **Non-sterile.**
Not autoclavable.



Box of 100 blades
No. 10020-00



Box of 100 blades
No. 10021-00



Box of 100 blades
No. 10022-00



Box of 100 blades
No. 10023-00

Standard Scalpel Handle #3 Solid



#3
12 cm

No. 10003-12

MOST
POPULAR

Secure Scalpel Handle #3


A safety lock holds the blade securely, and allows simple and safe blade attachment and removal.




#3
12 cm

No. 10003-13


- 1 Slide blade onto front pin of the handle.



- 2 Then slide pin to front slot of blade. Rotate blade clockwise and secure blade to back pin on handle.



- 3 Scalpel is ready to use.



Blades for #3 and #7 Scalpel Handles

The alloy used has a high carbon content which provides a longer lasting edge. Blades come individually wrapped. **Non-sterile.**

Not autoclavable.



Box of 100 blades
No. 10010-00



Box of 100 blades
No. 10011-00



Box of 100 blades
No. 10012-00



Box of 100 blades
No. 10015-00

**Short Scalpel
Handle #7 Solid**

#7 short
12 cm

No. 10007-12

**Standard Scalpel
Handle #7 Solid**

#7 long
16.5 cm

No. 10007-16

Scalpel Blade Remover

For safe removal of scalpel blades, simply insert scalpel with blade into the Scalpel Blade Remover and press the sides together. This will dislodge the blade from handle and hold the blade securely for release.



6.5 cm

No. 10002-00

Scalpel Blade Removal and Disposal Box

This plastic device will remove used scalpel blades safely and retain them for safe disposal. Can be used for blades that fit the #3, #4, #7 and Gross Anatomy handles.


Capacity approximately 80 blades
7.5 x 5 x 2.5 cm

Carton of 10 boxes
No. 10002-50




Your fingers will never come in contact with the blade.

- 1** Insert scalpel fully into disposal box.

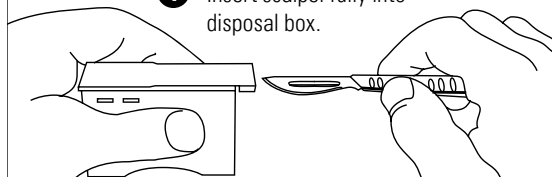

- 2** Press down on disposal box cover.

- 3** Withdraw scalpel handle.

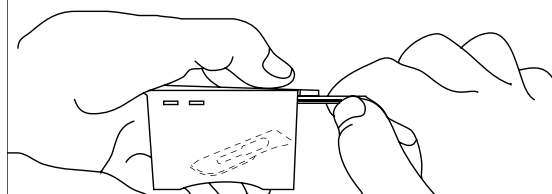

Gross Anatomy Blade and Handle



7.5 cm

Box of 100 blades
No. 10060-00



13 cm

No. 10060-13

Disposable Safety Scalpels

Plastic handle #3 with stainless steel blades. The protective cartridge completely covers the blade for safe, fast, and easy disposal. **Single-use and non-sterile.**



#10 scalpels
Pkg. of 10
No. 10000-10



#11 scalpels
Pkg. of 10
No. 10000-11



#15 scalpels
Pkg. of 10
No. 10000-15




Scalpel shown with safety cartridge closed and locked into place.

Plastic handle with stainless steel blades
14 cm

Safety Scalpel Handle #3 and Blade Cartridges

The Safety Scalpel Handle #3 is compatible with all Safety Scalpel Blades. The handle is reusable and made of Teflon coated stainless steel which provides a non-stick surface. The Blade Cartridges are color-coded with clear windows for easy identification. The protective cartridge completely covers the blade for safe, fast, and easy disposal. **Handle is reusable and autoclavable. Blades are single-use and non-sterile.**

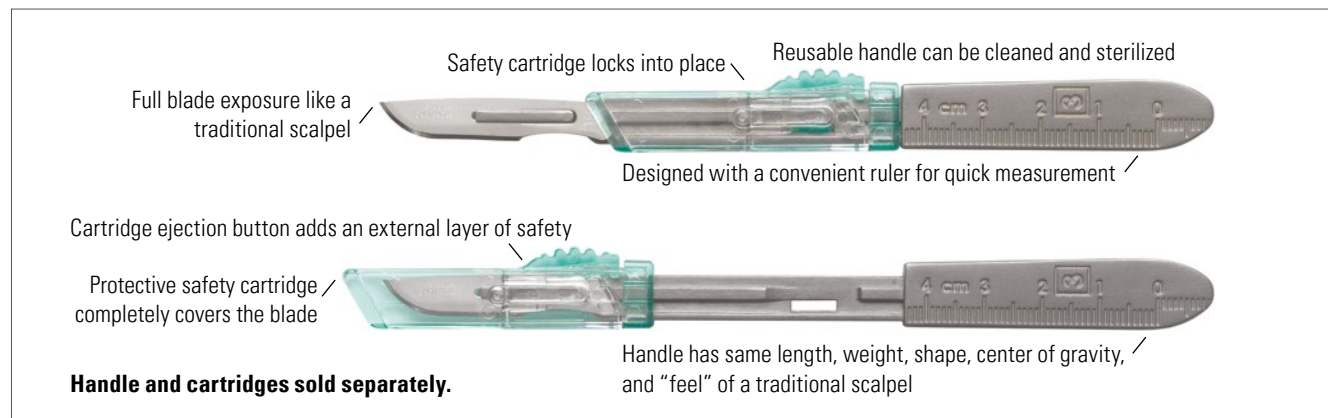

Safety Scalpel Handle #3



Teflon coated stainless steel
12.5 cm

No. 10006-12

Safety Scalpel Blade Cartridges



#10 blades
Pkg. of 10
No. 10010-10



#11 blades
Pkg. of 10
No. 10011-10



#15 blades
Pkg. of 10
No. 10015-10




Scalpel blade shown with safety cartridge closed and not attached to handle.

Safety Scalpel Blade Cartridges shown open and attached to handle.
Handle and cartridges sold separately.



Forceps & Hemostats

Dumont	Pages	63 – 73	<i>See page 189 for alloy and additional information.</i>
Fine	Pages	72 – 80	
Moria	Page	74	
S&T	Pages	75, 77	
Standard	Pages	81 – 91	
Hemostats	Pages	92 – 97	

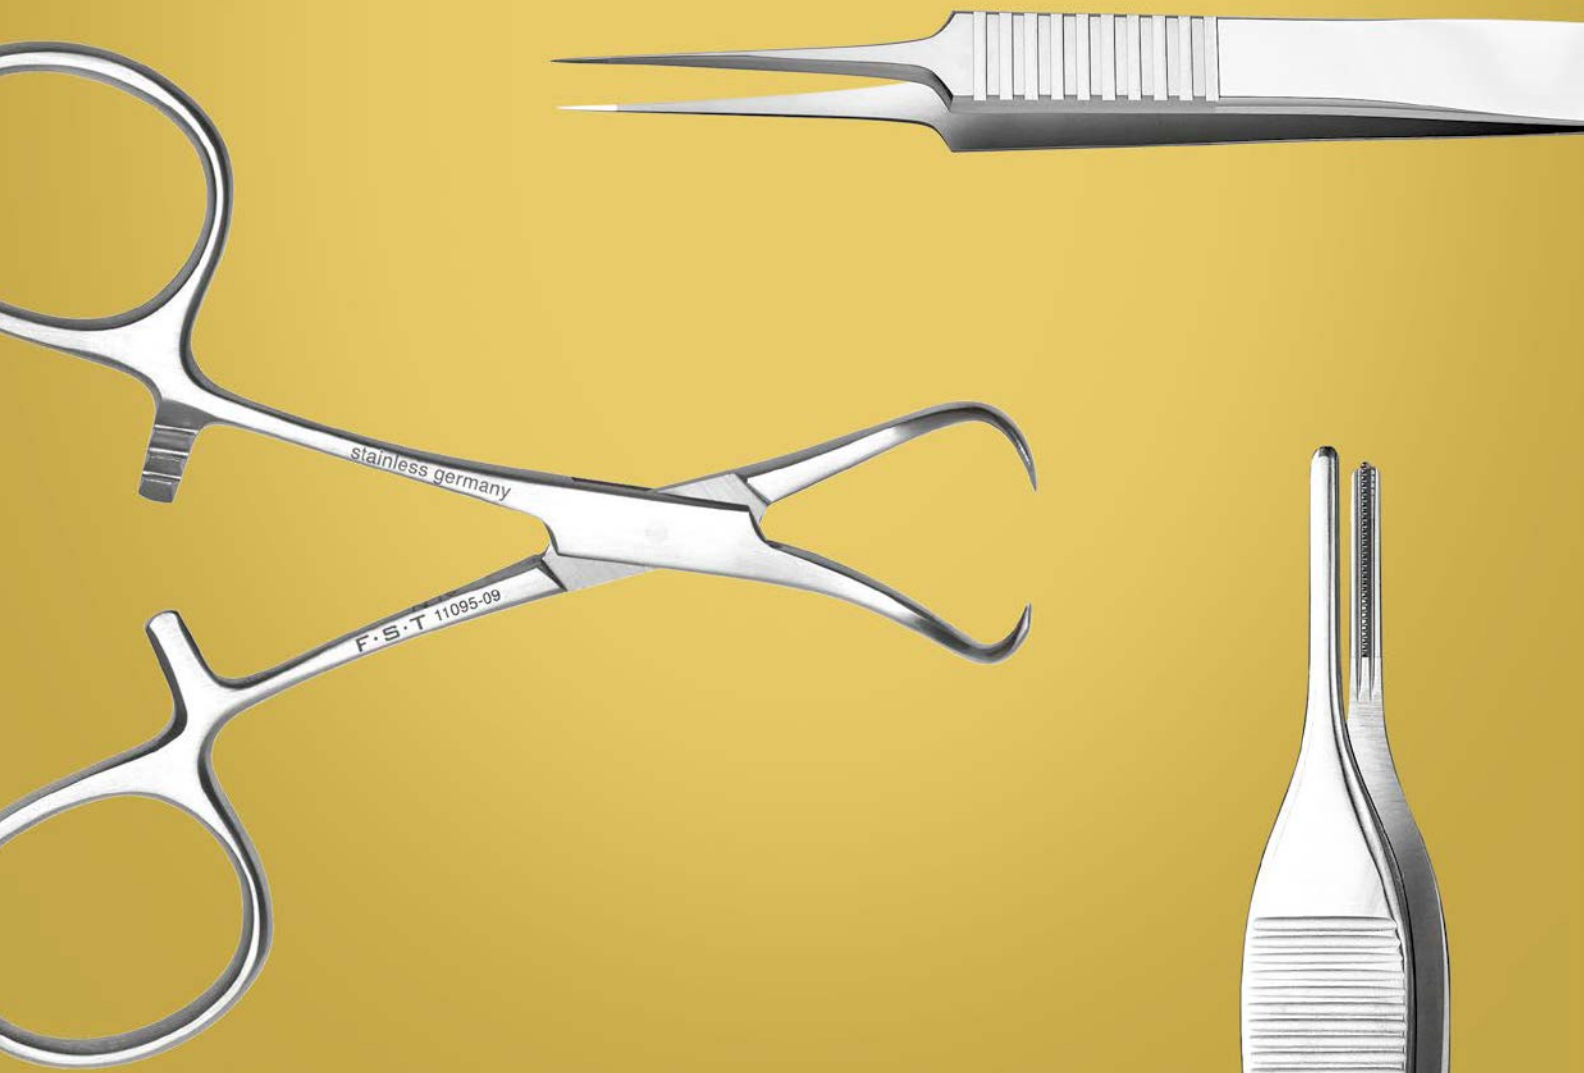

Dumont #5SF

The finest tips ever produced by Dumont.



Super fine tip
0.025 x 0.005 mm
Inox
11 cm

No. 11252-00

Dumont #5
Fine Tips

Finished under magnification and polished on the inside, the tips close flat to 3 mm and are less likely to open under excess pressure.



Biology tip
0.05 x 0.01 mm
Inox
11 cm

No. 11254-20

Dumont #5
Ceramic Coated

These forceps are non-reflective. The scratch and corrosion resistant coating guarantees durability.



For more information about our ceramic instruments please visit page 183

Biology tip
0.05 x 0.01 mm
Ceramic coated inox
11 cm

No. 11252-50

Dumont #5C0

These forceps have been honed down to make this the lightest and most precise Dumont forceps available.



Biology tip
0.05 x 0.01 mm
Dumostar
11 cm

No. 11295-20

For information on Dumont alloys and tip styles, see page 189.

MOST POPULAR

Dumont Micro-Blunted, Atraumatic Tipped Forceps

The sides of these forceps are distinctively ribbed to provide a better holding surface for maximum control of the instrument. The shanks are arched toward each other to transmit more holding strength to the points. The smooth inside surfaces at the tips will close flat to 5 mm with gentle pressure, increasing the total holding area considerably. The microscopically matched tips are gently blunted to prevent tissue puncture and are recommended as micro needle holders.



Straight
0.10 x 0.06 mm
Inox
11 cm

Medical #5
No. 11253-20



Off-center
0.13 x 0.08 mm
Inox
11.5 cm

Medical #5A
No. 11253-21



Short curve
0.17 x 0.10 mm
Inox
12 cm

Medical #7S
No. 11273-22



Curved
0.17 x 0.10 mm
Inox
11.5 cm

Medical #7
No. 11273-20



Angled 45°
0.10 x 0.06 mm
Inox
11 cm

Medical #5/45
No. 11253-25



Angled 90°
0.10 x 0.06 mm
Inox
11 cm

Medical #5/90
No. 11253-29

Dumont #55

Bevelled, like #5 but with extra light and fine shanks.



Biology tip
0.05 x 0.02 mm
11 cm

Inox
No. 11255-20

Dumostar
No. 11295-51

Dumont #5
Mirror Finish Forceps

The last 5 mm on the inside of the tips are highly polished to help prevent tissue from sticking. Ideal for embryos, nerves, or any other adhesive tissue.



Standard tip
0.10 x 0.06 mm
11 cm
Inox

No. 11251-23

Biology tip
0.05 x 0.02 mm
11 cm
Inox

No. 11252-23

For information on
Dumont alloys and tip
styles, see page 189.

Dumont #5

These are the most widely used Dumont forceps.
Bevelled, very fine shanks for best visibility.



Standard tip
0.10 x 0.06 mm
11 cm

Inox
No. 11251-20

Dumoxel
No. 11251-30

Dumostar
No. 11295-00

Carbon
0.08 x 0.04 mm
Not autoclavable
No. 11251-10

Biology tip
0.05 x 0.02 mm
11 cm

Inox
No. 11252-20

Dumoxel
No. 11252-30

Dumostar
No. 11295-10

TITANIUM
No. 11252-40

Dumont WA #5

These specially designed forceps offer improved stability with an ergonomic body that allows the forceps to fit more comfortably in your hand. A domed end with no soldering grooves allows the forceps to be thoroughly and easily cleaned, preventing biofilm residues.



Side View

- | | |
|----------------|----------------|
| Standard tip | Biology tip |
| 0.10 x 0.06 mm | 0.05 x 0.02 mm |
| Inox | Inox |
| 12 cm | 12 cm |
| No. 11251-21 | No. 11252-21 |

Dumont #5XL



- | |
|----------------|
| Standard tip |
| 0.10 x 0.06 mm |
| Inox |
| 15 cm |
| No. 11253-10 |

For information on
Dumont alloys and tip
styles, see page 189.

Dumont #L5

Slide sleeve keeps tips together so specimens may be securely held and retained. Slide may be locked in place so that forceps can be used in regular fashion. **Autoclavable.**



Standard tip
0.10 x 0.06 mm
Inox
11 cm

No. 11253-27

**Dumont #5
Teflon® Coated**

These antimagnetic forceps are ideal for use in cryogenic environments and for EM samples. Teflon® coating provides a non-stick surface.



Standard tip
0.10 x 0.06 mm
Teflon coated inox
11 cm

No. 11626-11

Dumont #5/45

45° tips for improved visibility and control.




**MOST
POPULAR**

Standard tip
0.10 x 0.06 mm
Dumoxel
11 cm

No. 11251-35

**Dumont #5/45
Cover Slip Forceps**

Designed to pick up cover slips out of multi-well plates. The tip width is squared for a better grip.



1 mm from tip to bend
Upper tip: 0.10 x 0.08 mm
Lower tip: 0.10 x 0.02 mm
Dumoxel
11.5 cm

No. 11251-33

Dumont #3

Tapered and sturdy shanks.



Standard tip
0.17 x 0.10 mm
12 cm

Dumoxel
No. 11231-30

Dumostar
No. 11293-00

Dumont #3c



Standard tip
0.17 x 0.10 mm
Inox
11 cm

No. 11231-20

Dumont #6

Sharply angled tips for access to difficult areas.



Standard tip
0.17 x 0.10 mm
Inox
11.5 cm

No. 11260-20

Dumont #7
Fine Tips

Finished under magnification and polished on the inside, the tips close flat to 3 mm and therefore less likely to open under excess pressure.



Biology tip
0.07 x 0.03 mm
Inox
11 cm

No. 11274-20

For information on
Dumont alloys and tip
styles, see page 189.

Dumont #7



Standard tip
0.17 x 0.10 mm
11.5 cm

Dumoxel
No. 11271-30

Dumostar
No. 11297-00

Biology tip
0.07 x 0.04 mm
11.5 cm

Dumoxel
No. 11272-30

Dumostar
No. 11297-10

·TITANIUM·

No. 11272-40

Dumont #7
Ceramic Coated



For more information about
our ceramic instruments
please visit page 183

Biology tip
0.07 x 0.04 mm
Ceramic coated inox
11 cm

No. 11272-50

Dumont #7B



Standard tip
Serrated
0.17 x 0.10 mm
Inox
11 cm

No. 11270-20

FORCEPS

Dumont #4

Similar to #5, but with broader shanks.



Standard tip
0.13 x 0.08 mm
Dumoxel
11 cm

No. 11241-30

Biology tip
0.06 x 0.04 mm
Dumoxel
11 cm

No. 11242-40

Dumostar
No. 11294-00

**Dumont #2
Laminectomy Forceps**

These forceps can be used to break off delicate bone during mouse laminectomies, as well as fine skull bone removal.



0.40 x 0.02 mm
Inox
12 cm

No. 11223-20

**Dumont #2AP
Epoxy Coated**

Provides good insulation for up to 220 AC voltage work and highly impervious to chemical solutions. Frozen or super cold sections will not adhere to the gripping surfaces.



Tip width: 1.5 mm
Epoxy coated Inox
12 cm

No. 11220-21

Dumont AA**Dumont AA
Epoxy Coated**

Slip-proof acid and electric shock resistant epoxy coating covering 17.5 mm from the tips.



0.4 x 0.2 mm
Inox
12.5 cm
No. 11210-20



0.4 x 0.2 mm
Epoxy coated inox
12.5 cm
No. 11210-10

For information on
Dumont alloys and tip
styles, see page 189.

Dumont SS

The tips are smooth on the inside for a gentle grip. Applying full strength will not separate tips and a strong hold on the smallest specimen is ensured.



Standard tip
0.20 x 0.12 mm
Inox
13.5 cm
No. 11203-23



Biology tip
0.10 x 0.06 mm
Dumoxel
13.5 cm
No. 11200-33



Angled 45°
No. 11203-25

Dumont Mini Forceps



0.12 x 0.07 mm
Inox
7 cm

Style 3
No. 11200-10

0.14 x 0.06 mm
Inox
7 cm

Style 4
No. 11200-12

0.09 x 0.05 mm
Inox
8.2 cm

Style 5
No. 11200-14

Fine Forceps Mirror Finish

The last 5 mm on the inside of the tips are highly polished to help prevent tissue from sticking. Ideal for embryos, nerves, or other adhesive tissue.



0.10 x 0.06 mm
11 cm

No. 11412-11

0.05 x 0.02 mm
11 cm

No. 11413-11

O-Rings for Forceps

These rubber O-rings fit our forceps and keep them closed with variable degrees of pressure on the tips.

Pkg. of 10
No. 11200-00




Fine Forceps Broad Shanks

Straight forceps with sturdy coarse tips.



0.2 x 0.12 mm
12 cm

No. 11445-12

Dumont #5AC

Biology Tip
0.07 x 0.02 mm
Inox
Type #5 Anti-Capillary
11.5 cm

No. 11258-20

**NEW
ITEM**

Fine Forceps Self-Closing

Ideal for lifting and holding EM grids. Consistent pressure at tips. Correctly tensioned "cross-over" shanks come to a microscopically matched point.



0.08 x 0.04 mm
11.5 cm

No. 11480-11



0.10 x 0.06 mm
11 cm

No. 11485-11



0.20 x 0.12 mm
11.5 cm

No. 11487-11

FORCEPS

These forceps have the most finely executed points available. They are extremely light, superbly balanced, and have a gentle spring action. The shanks are specially designed with an arch which ensures maximum force to the tips. The tips close flat for 6 mm from the points to give a large holding area. The tips have been expertly finished under magnification.

Balanced with gentle spring action and tips that are perfectly matched.



Moria



Moria



Moria

Tip width: 0.5 mm
Blunt
10 cm



Straight
11 cm

Moria MC40
No. 11370-40



Curved
11 cm

Moria MC40/B
No. 11370-42



Straight
13 cm

Moria 9980
No. 11399-80



Curved
13 cm

Moria 9987
No. 11399-87



Smooth
Moria MC32/B
No. 11373-22



Smooth
Moria MC31/B
No. 11373-12



Microserrated
Moria MC32
No. 11370-32



Microserrated
Moria MC31
No. 11370-31

SuperGrip Forceps

The tips are processed with MicroCrystals®, a method developed by S&T® to infuse tungsten carbide on stainless steel. The formation of this ultra-fine coating guarantees atraumatic handling of tissue while improving the grip dramatically. The recommended use is where forceps are utilized as needle holders or when slippery tissues might be encountered.



S&T®

0.3 x 0.25 mm
11 cm



The gripping surface is similar to a match head.

S&T®



0.3 x 0.25 mm
11 cm



Straight

No. 00108-11



Angled 45°

No. 00109-11




Straight

No. 00632-11




Angled 45°

No. 00649-11


Bonn

20x magnification




Smooth
Tip width: 0.3 mm
Tip platform: 5 mm
7 cm

No. 11083-07




1x2 teeth
Tip width: 0.45 mm
Teeth width: 0.1 mm
7 cm

No. 11084-07


Mirror Finish Bonn Forceps

20x magnification



Straight
1x2 teeth
Tip width: 0.12 mm
Partly polished
10 cm

No. 11090-10


**NEW
ITEM****McPherson Forceps**

Angled 45°
Smooth
Tip width: 0.4 mm
Platform
9 cm

No. 11063-07

**MOST
POPULAR**

Mirror Finish Suture Tying Forceps




Straight
Tip diameter: 0.3 mm
Tying Platform: 5 mm
Partly polished
10 cm

No. 11093-10


**NEW
ITEM**

Mirror Finish Suture Tying Forceps with Teeth

A unique tip style fusing a suture tying platform and a 1x2 teeth tip for tissue manipulation.



20x magnification



Straight
Tip width: 0.3 mm
Platform with 1x2 teeth
9 cm


No. 11090-09

Suture Tying Forceps

The platform tips close flat. This ensures a reliable grip on sutures.



S&T®




Tip diameter: 0.3 mm
Tying platform: 6 mm
13.5 cm

No. 00272-13

Suture Tying Forceps

The platform tips close flat. This ensures a reliable grip on sutures.




Tip diameter: 0.5 mm
Tying platform: 5 mm
10 cm

No. 18025-10

Round Handled Suture Tying Forceps

Round handles allow easy fingertip adjustments.





Tip diameter: 0.35 mm
Tying platform: 5.5 mm
10.5 cm

No. 18026-10

Vial Forceps


Tips taper for 6 cm allowing easy access to specimens in vials.

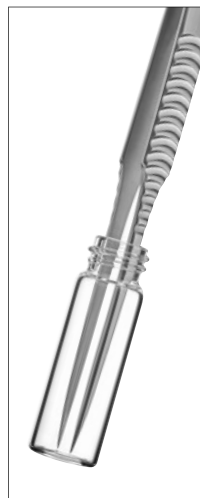

Tip diameter: 0.5 mm
15 cm

No. 11006-15

Vitro Grasping Forceps



Serrated
Tip diameter: 0.7 mm
14 cm

No. 11900-14

Graefe Forceps

Tip width: 0.6 mm
7 cm




Straight
Serrated

No. 11064-07



Curved
Serrated

No. 11065-07



Straight
1x2 teeth

No. 11066-07



Curved
1x2 teeth

No. 11067-07

Bishop-Harman

Extra light, fenestrated handles ensure a good grip.




Tip width: 0.5 mm
8.5 cm




Serrated

No. 11069-08



1x2 teeth

No. 11070-08



10x magnification

Octagon Forceps

The octagon shaped grip provides a particularly secure finger hold.



Tip width: 0.8 mm
9.5 cm




Straight
Serrated

No. 11040-08



Curved
Serrated

No. 11041-08



Straight
1x2 teeth

No. 11042-08



Curved
1x2 teeth

No. 11043-08

Extra Fine Graefe Forceps



Tip width: 0.5 mm
10 cm



Serrated
No. 11150-10



Serrated
No. 11151-10



Serrated
No. 11152-10




Smooth
No. 11158-10



Smooth
No. 11159-10



Smooth
No. 11160-10



1x2 teeth
No. 11153-10



1x2 teeth
No. 11154-10



1x2 teeth
No. 11155-10

Graefe Forceps



Tip width: See below
10 cm



Serrated
Tip width: 0.8 mm
No. 11050-10



Serrated
Tip width: 0.8 mm
No. 11051-10

MOST
POPULAR



Serrated
Tip width: 0.8 mm
No. 11052-10



Serrated
Tip width: 0.8 mm
No. 11049-10

·TITANIUM·

Tip width: 1.2 mm
No. 11650-10


·TITANIUM·

Tip width: 1.2 mm
No. 11651-10

·TITANIUM·

Tip width: 1.2 mm
No. 11652-10

For more information
see page 183.



1x2 teeth
Tip width: 0.8 mm
No. 11053-10



1x2 teeth
Tip width: 0.8 mm
No. 11054-10

MOST
POPULAR



1x2 teeth
Tip width: 0.8 mm
No. 11055-10

Episcleral Forceps

The tips of these forceps arch toward each other, closing flat. Exceptional gripping power is possible with minimal damage to tissue. A limit pin prevents excessive applied pressure.



Slide lock
Smooth
Tip width: 1 mm
11 cm

No. 11062-10



Tip thickness: 0.2 mm
10 cm

No. 11071-10

Pierse Fixation Forceps

For exceptional gripping power with no damage to sclera, vascular sheath and epineurium.



Tissue retention
hole of 0.3 mm
behind tips.

Straight
0.1 x 0.4 mm
13 cm

No. 18155-13

Plastic Forceps

These forceps are non-magnetic, acid resistant and able to withstand temperatures up to 240°C (464°F). Tips do not spread under pressure.



Acetyl
11.5 cm
Pkg. of 10 forceps




Sharp straight
0.40 x 0.25 mm

No. 11700-00




Blunt straight
1.5 x 0.40 mm

No. 11700-03




Sharp curved
0.30 x 0.20 mm

No. 11700-01



Blunt curved
1.5 x 0.40 mm

No. 11700-04




Sharp 45°
0.30 x 0.20 mm

No. 11700-02

Cross Action Forceps

These tissue transport forceps have a gentle action.




Cross serrated
Tip width: 4 mm
Tip depth: 8 mm
10 cm

No. 11075-00

Cover Glass Forceps

10.5 cm



Straight

No. 11074-02

Angled

No. 11073-10

Ring Forceps

For transport of tissue and organs. With limit screw to prevent excessive applied pressure.



ID: 1 mm
OD: 1.5 mm
8.5 cm

No. 11101-09

ID: 2.2 mm
OD: 3 mm
9 cm

No. 11103-09

ID: 4.8 mm
OD: 6 mm
9 cm

No. 11106-09

Circle Forceps

Cupped forceps for atraumatic gripping of organs and tissues.



Tip diameter: 0.7 mm
11.5 cm

No. 11072-11

Live Insect Handling Forceps

Very delicate.



Narrow
10 cm

No. 26029-10

Wide
10 cm


No. 26030-10

Micro-Adson

Our most delicate version of the popular Adson forceps.



Tip width: 0.8 mm
12 cm



Serrated

1x2 teeth

No. 11018-12


No. 11019-12

Micro-Adson with Fenestrated Handle

Our delicate Micro-Adson forceps, with five windows to aid in stability and easy finger adjustments.



12 cm

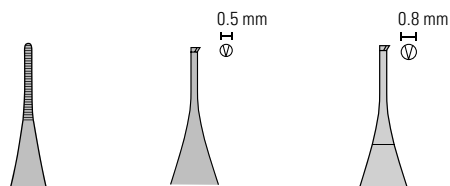

Serrated

1x2 teeth

Tip width: 0.8 mm
No. 11020-12

Tip width: 0.5 mm
No. 11032-12


Tip width: 0.8 mm
No. 11022-12

Adson

Wide, strong grip with narrow tips.



Tip width: 1.5 mm
12 cm



Serrated

1x2 teeth

No. 11006-12

No. 11027-12



Cross serrated
tungsten carbide
inlaid tip



No. 11506-12

MOST
POPULAR

MOST
POPULAR

**TUNGSTEN
CARBIDE**

For more information
see page 183.

Adson DeBakey**Atraumatic
DeBakey Serrations**

This tooth pattern, as shown, consists of one row of atraumatic teeth meshed with two opposite rows of atraumatic teeth.

These two forceps are ideal for gentle, atraumatic gripping of vessels, tissue and other delicate structures.



DeBakey serrations
Tip width: 1.5 mm
12.5 cm

No. 11617-12




DeBakey serrations
Tip width: 1.5 mm
15 cm

No. 11616-15

Adson-Graefe

Fine sharp teeth
Tip width: 4.5 mm
12.5 cm

No. 11030-12


Adson-Brown

Shark teeth
Tip width: 1.4 mm
12 cm


No. 11627-12

Semken

Slim pattern with long, narrow shanks and gentle spring action.



Tip width (mm)	Length (cm)	Item
1.3	13	No. 11008-13
1.5	15	No. 11008-15
·TITANIUM·		
1.5	15	No. 11608-15




Tip width (mm)	Length (cm)	Item
1.3	13	No. 11009-13
1.5	15	No. 11009-15

·TITANIUM·


For more information
see page 183.

**Narrow Pattern**

Lighter spring action than standard pattern for grasping more delicate tissue.



Tip width (mm)	Length (cm)	Item
2	12	No. 11002-12
2.15	13	No. 11002-13
2.25	14.5	No. 11002-14
2.35	16	No. 11002-16
2.4	18	No. 11002-18
2.75	20	No. 11002-20
3.2	25	No. 11002-25
·TITANIUM·		
2.25	14.5	No. 11602-14




Tip width (mm)	Length (cm)	Item
2	12	No. 11003-12
2.15	13	No. 11003-13
2.25	14.5	No. 11003-14
2.35	16	No. 11003-16
2.4	18	No. 11003-18
2.75	20	No. 11003-20




Standard Pattern

Broad pattern with strong spring action.



Tip width (mm)	Length (cm)	Item
2.5	12	No. 11000-12
2.8	13	No. 11000-13
3.25	14.5	No. 11000-14
3.3	16	No. 11000-16
3.7	18	No. 11000-18
3.75	20	No. 11000-20
3.9	25	No. 11000-25
4	30	No. 11000-30



Tip width (mm)	Length (cm)	Item
2.5	12	No. 11001-12
2.8	13	No. 11001-13
3.25	14.5	No. 11001-14
3.3	16	No. 11001-16
3.7	18	No. 11001-18
3.75	20	No. 11001-20

**Mouse Handling Forceps**

Long handles make picking up small rodents easy and help prevent bites.



Forceps with serrated silicone tips
Gripping surface: 15 x 20 mm
21 cm

No. 11036-20



Replacement silicone tips

Pkg of 2 tips
No. 11036-90



Slim 1x2 teeth

10 cm
No. 11023-10

14.5 cm
No. 11023-14

12 cm
No. 11023-12

15.5 cm
No. 11023-15



1x2 teeth

12 cm
No. 11021-12

14.5 cm
No. 11021-14

15.5 cm
No. 11021-15



2x3 teeth

14.5 cm
No. 11022-14


15.5 cm
No. 11022-15



1x2 teeth

14 cm
No. 11029-14

Used with rongeur No. 16021-14
(page 36) in laminectomy to securely
hold spinal column.


Gillies

Serrated
1x2 teeth
15 cm

No. 11028-15

Russian

Special cupped pattern
for superior grip.




15 cm

No. 11026-15

Organ Holding Forceps


With limit screw to prevent
excessive applied pressure.



Serrated
14.5 cm

No. 11031-15

London Forceps



Angled
Serrated
16 cm

No. 11080-02

Titanium Forceps



·TITANIUM·

For more information
see page 183.



Straight
Serrated
16 cm


No. 11602-16

Gerald Forceps



Straight
Serrated
18 cm

No. 11014-18



Curved
Serrated
18 cm

No. 11015-18

Taylor Forceps

Serrated and smooth versions available.

Straight
Serrated
17 cm


No. 11010-17

Curved
Serrated
17 cm

No. 11011-17

Straight
Smooth
17 cm

No. 11016-17

Curved
Smooth
17 cm

No. 11017-17

**Potts-Smith Forceps**Straight
Serrated18 cm
No. 11012-1821 cm
No. 11012-2125 cm
No. 11012-25Straight
1x2 teeth
18 cm

No. 11024-18

Curved
Serrated18 cm
No. 11013-1821 cm
No. 11013-21Curved
1x2 teeth
18 cm

No. 11025-18



Ultra Fine Hemostat



Tip width: 0.6 mm
Smooth
12 cm



Straight

No. 13020-12



Curved

No. 13021-12

Fine Hemostat



Tip width: 1 mm
Smooth
12 cm



Straight

No. 13006-12



Curved

No. 13007-12

Micro-Mosquito



Tip width: 1.3 mm
Serrated
12 cm




Straight

No. 13010-12



Curved

No. 13011-12



Angled 90°

No. 13012-12

Halsted-Mosquito



Tip width: 1 mm
Serrated
12.5 cm

Tip width: 1 mm
Serrated
Left handed
12.5 cm



Straight

No. 13008-12



Curved

No. 13009-12



Straight

No. 13108-12



Curved

No. 13109-12



MOST
POPULAR

Crile




Tip width: 1.5 mm
Serrated
14 cm



Straight

No. 13004-14



Curved

No. 13005-14

Kelly




Tip width: 1.5 mm
Serrated
14 cm



Straight

No. 13018-14




Curved

No. 13019-14

Baby-Mixter



Tip width: 1.3 mm
Serrated
14 cm



Curved

No. 13013-14

Providence-Hospital




Tip width: 1.5 mm
Serrated
14 cm



Straight

No. 13014-14



Curved

No. 13015-14

HEMOSTATS

Hartman



Tip width: 1 mm
Serrated
10 cm



Straight

No. 13002-10



Curved

No. 13003-10

MOST
POPULAR

Backhaus Towel Forceps



9 cm

No. 11095-09



13 cm

No. 11095-13

Allis Forceps

Tissue and organ holding forceps.



④ 4 mm

5x6 teeth
Tip width: 4 mm
15 cm

Allis
No. 11091-15

④ 3 mm


4x5 teeth
Tip width: 3 mm
12 cm

Allis-Baby
No. 11092-12




Probes, Needle Holders, Wound Closure, Retractors & Clamps

Probes & Hooks	Pages	99 – 103
Spatulae	Pages	102 – 105
Hippocampal Tools	Page	106
Spoons	Page	107
Pins & Holders	Pages	108 – 109
Wound Closure	Pages	110 – 121
Retractors	Pages	122 – 129
Vascular Instruments	Pages	130 – 139

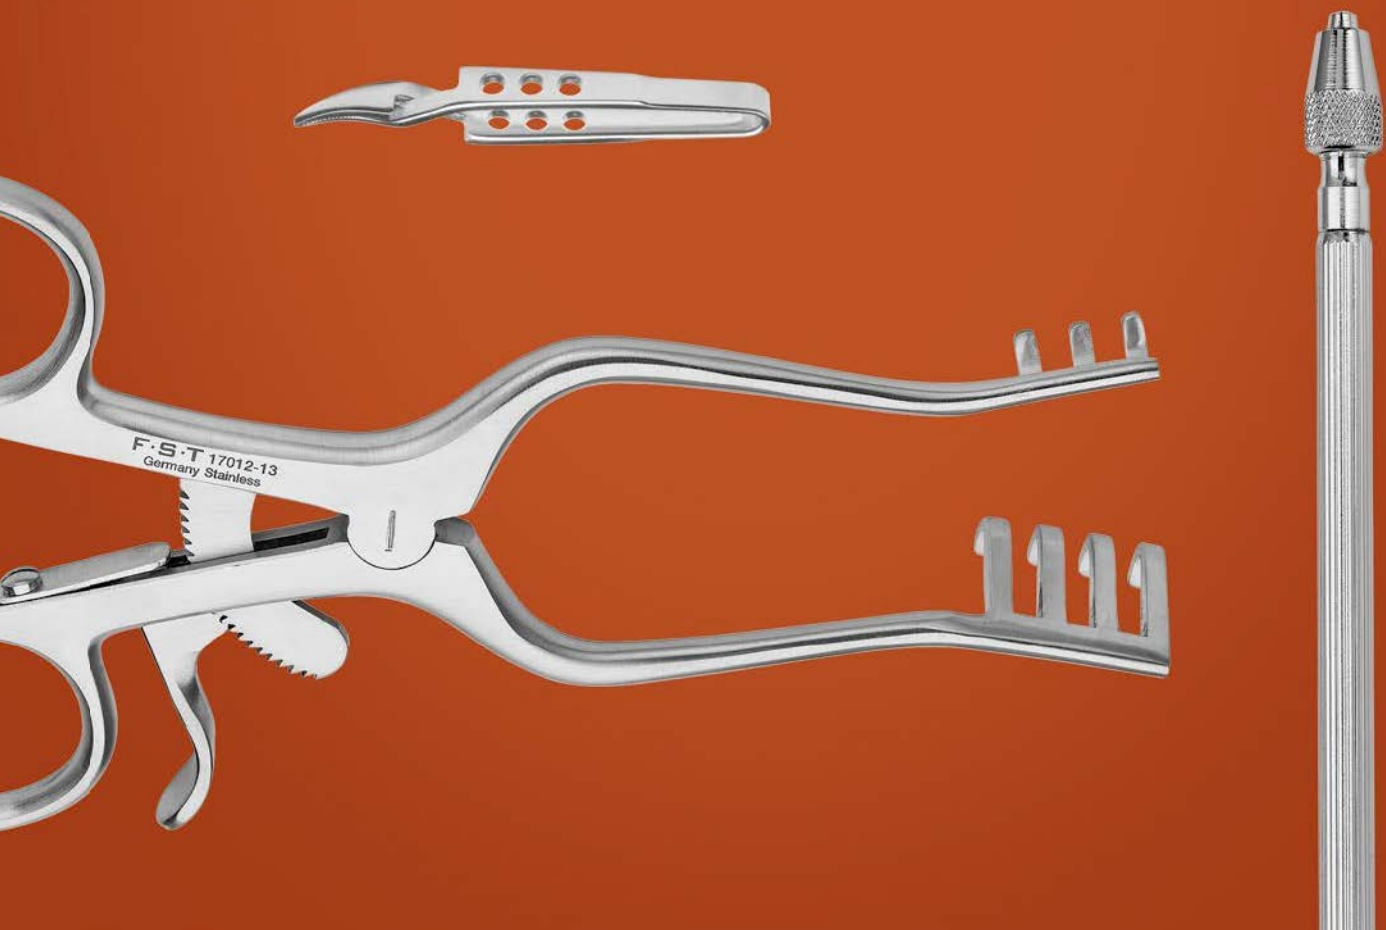

Double Pronged Pick

For peritoneum, pleura, endocardium, organ capsules and skin. Grasps and lifts skin, tissue and dura, etc.




The tip consists of two very sharp, nearly horizontally opposed points. By applying gentle downward pressure and twisting slightly in a clockwise fashion, the points will embed themselves horizontally into fine membranes or skin, etc., so that it may be lifted upward. This instrument also has been used successfully when separating fine tissue from an underlying area that is not to be cut.



No. 18067-11

Spinal Cord Hook



Shaped like a ligation aid and sized to isolate the spinal cord from the dura of adult mice and neonatal rats. The cord can then be cut with minimal damage to the dura.



Tip diameter: 3 mm
12 cm

No. 10162-12

Bonn Micro Probes



Length: 13.5 cm



Actual size

Straight
Tip diameter: 0.025 mm

No. 10030-13



200%

Angled 45°
Tip diameter: 0.025 mm

No. 10032-13



Actual size

Curved
Tip diameter: 0.025 mm

No. 10031-13



Actual size

Large curve
Tip diameter: 0.038 mm

No. 10033-13

Micro Points



Length: 15.5 cm



200%

Angled 90° short
Tip diameter: 0.05 mm

No. 10063-15



200%

Angled 90°
Tip diameter: 0.02 mm

No. 10065-15



200%

Angled 45°
Tip diameter: 0.038 mm

No. 10066-15

Probes and Explorers



Length: 15.5 cm



Actual size

Straight

Tip diameter: 0.25 mm

No. 10140-01

**MOST
POPULAR**



Actual size

Short angle

Tip diameter: 0.12 mm

No. 10140-04



Actual size

Angled

Tip diameter: 0.15 mm

No. 10140-02



Actual size

Long angled

Tip diameter: 0.15 mm

No. 10140-03

Micro Hooks



175%

Short round hook

Tip diameter: 0.05 mm

Length: 13 cm

No. 10064-14



175%

Sharp hook

Tip diameter: 0.075 mm

Length: 12 cm

No. 10061-12



175%

Blunt hook

Tip diameter: 0.30 mm

Length: 12 cm

No. 10062-12

Titanium Micro Point, Y-Hook, and Spatula

These instruments are lightweight, color coded for easy identification, have an ergonomic design and a non-reflective surface.

Micro Point



·TITANIUM·

For more information
see page 183.



650%

Angled 45°
Tip diameter: 0.4 mm
Titanium
12.5 cm


No. 10165-11

Y-Hook



·TITANIUM·

For more information
see page 183.



700%

Angled 45°
Tip width: 0.5 mm
Titanium
12.5 cm

No. 10166-11

Micro Spatula



·TITANIUM·

For more information
see page 183.




700%

Angled 30°
Tip width: 0.6 mm
Tip thickness: 0.25 mm
Titanium
12.5 cm

No. 10167-11

Vessel Dilating Probe



200%

Tip diameter: 0.6 mm
12.5 cm

No. 10160-13

Gross Anatomy Probe




**MOST
POPULAR**



Angled 45°
Tip diameter: 1.2 mm
15 cm

No. 10088-15


Combination Probe and Spatula



14 cm

No. 10090-13

Combination Spoon and Spatula



17.5 cm

No. 10090-17

Micro Spatula



Tip width: 1 mm
Tip thickness: 0.25 mm
11 cm

No. 10089-11

Mirror Finish Micro Spatula


Mirror finished to provide a non-stick spatula.



Tip width: 0.8 mm
Tip thickness: 0.25 mm
12 cm

No. 10087-12

Double-Ended Micro Spatula



Tip width: 2 mm
Tip thickness: 0.3 mm
13 cm

No. 10091-12

**MOST
POPULAR**

Iris Spatulae




Tip width: 3 mm
Tip thickness: 0.4 mm
13 cm

No. 10094-13



Tip width: 1.7 mm
Tip thickness: 0.3 mm
13 cm


No. 10093-13



Tip width: 1.8 mm
Tip thickness: 0.3 mm
12 cm

No. 10092-12

Micro Spatula Kit

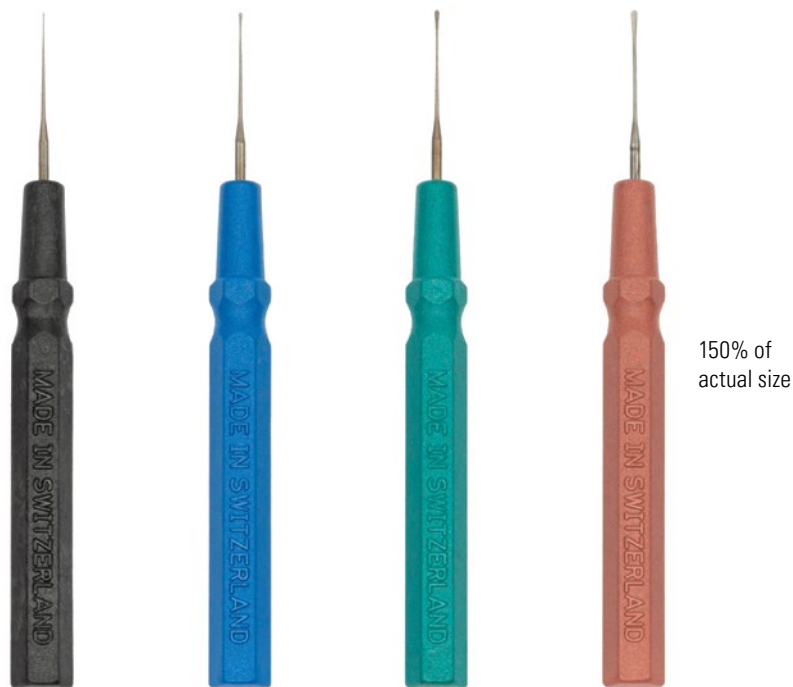

Kit with 4 pieces

No. 10098-06

**NEW
ITEM**

Black



Straight
Tip width: 0.2 mm
6 cm

Blue



Straight
Tip width: 0.3 mm
6 cm

Green



Straight
Tip width: 0.5 mm
6 cm

Red



Straight
Tip width: 0.7 mm
6 cm

Mini Hippocampal Dissecting Tool

The instrument ends are malleable to allow you to adjust their shape to the correct angle for optimal positioning.




14.5 cm

No. 10099-12

Hippocampal Dissecting Tool

The instrument ends are malleable to allow you to adjust their shape to the correct angle for optimal positioning.



16 cm

No. 10099-15

Spoon



Diameter: 8 mm
Depth: 2 mm
12.5 cm

Moria 1121B
No. 10321-08

Mini Perforated Spoon

Most commonly used to take embryos out of solution and handling very small organs.




Perforations are
0.8 mm in diameter.

Diameter: 8 mm
Depth: 1 mm
10 cm

Moria MC 17C
No. 10370-19

Perforated Spoon

Most commonly used to take embryos out of solution and handling very small organs.

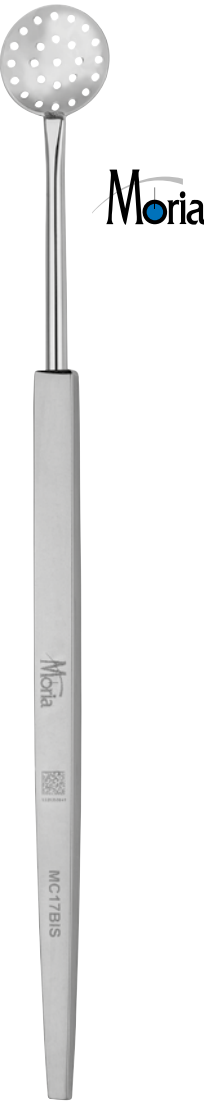

Perforations are
0.9 mm in diameter.

MOST
POPULAR

Diameter: 15 mm
Depth: 3 mm
14.5 cm

Moria MC 17 BIS
No. 10370-18

Diameter: 20 mm
Depth: 5 mm
14.5 cm

Moria MC 17
No. 10370-17

Mirror Finish
Cutting Spoon

Non stick cutting spoon.



Diameter: 4.5 mm
Depth: 0.15 mm
13 cm

No. 10360-13

Pin Holder

Light weight.



Nickel-plated chuck
Aluminum handle
Jaw opening: 0–1 mm
17 cm

No. 26018-17

**MOST
POPULAR**

Pin Holder



Moria

Nickel-plated
Jaw opening: 0–1 mm
12 cm

No. 26016-12

**MOST
POPULAR**

Self Holding Pin and Bone Screw Forceps

Designed with a serrated tip and grooved cup for a stable and secure grip, these forceps hold pins and screws allowing precise placement at your target area. They are compatible with all Fine Science Tools insect pins, minuten pins and bone screws.



200%


Polished stainless steel
14 cm

No. 26100-00

Insert Pins

All insert pins fit any of our pin holders.
Pins are antimagnetic and acid resistant.

Stainless steel
5 cm

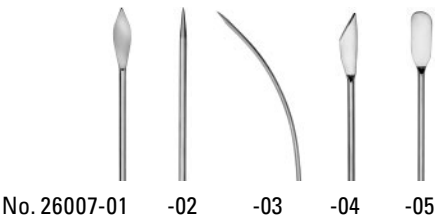


Black Anodized Minutien Pins

These high quality pins are black for best visibility under high magnification and bright light.

Tip diameter: 0.0175 mm
Rod diameter: 0.15 mm
10 mm

Box of 500 pins
No. 26002-15



Stainless Steel Minutien Pins

The thinnest and finest pins available.

Tip diameter: 0.0125 mm
Rod diameter: 0.1 mm
10 mm

Box of 500 pins
No. 26002-10




Tip diameter: 0.02 mm
Rod diameter: 0.2 mm
10 mm

Box of 500 pins
No. 26002-20



Black Anodized Insect Pins

Nylon heads
Tip diameter: 0.03 mm
Pkg. of 100 pins

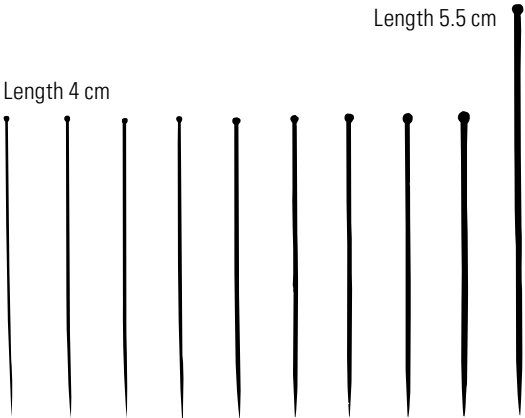

Size	000	00	0	1	2	3	4	5	6	7
Rod diameter (mm)	.25	.30	.35	.40	.45	.50	.55	.60	.65	.70
No. 26000	-25	-30	-35	-40	-45	-50	-55	-60	-65	-70


Stainless Steel Insect Pins

Nylon heads
Tip diameter: 0.03 mm
Pkg. of 100 pins

Size	000	00	0	1	2	3	4	5	6	7
Rod diameter (mm)	.25	.30	.35	.40	.45	.50	.55	.60	.65	.70
No. 26001	-25	-30	-35	-40	-45	-50	-55	-60	-65	-70

Etched Tungsten Micro Needles

These tungsten micro needles are drawn to a 1 micron tip and three different rod diameters are offered. Each provides lateral stability as well as minimal spring action during manipulation. The micro needles can be used with our pin holders shown on page 106.

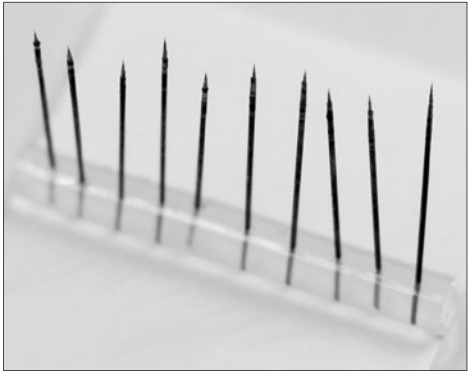

Tip diameter: 1 µm (0.001 mm)
12 mm

Box of 10 needles

Rod diameter (mm)	Item
0.125	No. 10130-05
0.25	No. 10130-10
0.5	No. 10130-20

Castroviejo

Micro pattern, with slightly blunted tips.



Straight
9 cm

With lock
No. 12060-01

Without lock
No. 12060-02




Curved
9 cm

With lock
No. 12061-01

Without lock
No. 12061-02

Round Handled Needle Holder with Suture Cutter

Round handles allow easy fingertip adjustments.



Curved
Cutting edge: 3.5 mm
14 cm

Without lock
No. 12075-14

Cautionary note:

Never use a micro needle holder with needles that are too thick, as this can easily damage the fine jaws. Use only micro needles of less than 0.2 mm diameter (see page 116).

Round Handled Needle Holder

Round handles allow easy fingertip adjustments.



Straight
12.5 cm

With lock
No. 12075-12

Without lock
No. 12076-12

Mathieu

Extra slim and narrow profile, with squeeze-lock.
Facilitates excellent wrist motion for suturing.



14 cm

With lock
No. 12010-14




With tungsten
carbide jaws
14 cm
With lock
No. 12510-14



**TUNGSTEN
CARBIDE**
For more information
see page 183.

Castroviejo with Tungsten Carbide Jaws

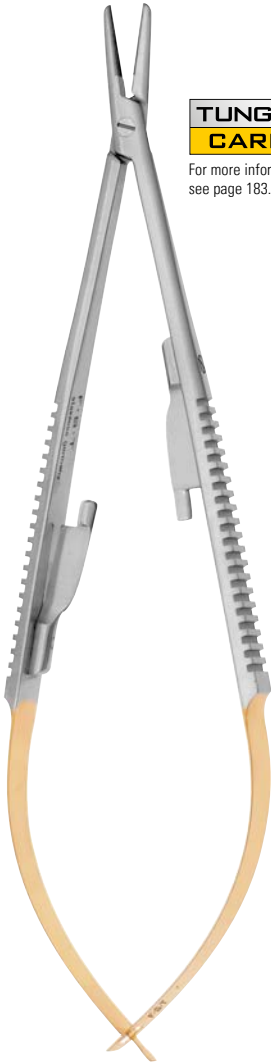

**TUNGSTEN
CARBIDE**
For more information
see page 183.



With tungsten carbide jaws
14 cm

With lock
No. 12565-14

Halsey



Smooth
13 cm



With tungsten
carbide jaws
13 cm

**TUNGSTEN
CARBIDE**

For more information
see page 183.

No. 12001-13

No. 12501-13

Halsey with Tungsten Carbide Jaws



**TUNGSTEN
CARBIDE**

For more information
see page 183.



With tungsten
carbide jaws
12.5 cm

No. 12500-12

**MOST
POPULAR**

Olsen-Hegar with Suture Cutter



10 mm cutting edge
1.5 mm jaw surface
12 cm

15 mm cutting edge
2 mm jaw surface
14 cm

MOST
POPULAR

No. 12002-12

No. 12002-14



No. 12102-12

Olsen-Hegar with Suture Cutter
and Tungsten Carbide Jaws



TUNGSTEN
CARBIDE

For more information
see page 183.



With tungsten
carbide jaws
10 mm cutting edge
1.5 mm jaw surface
12 cm

With tungsten
carbide jaws
15 mm cutting edge
2 mm jaw surface
14 cm

No. 12502-12

No. 12502-14



No. 12512-12

NEEDLE HOLDERS

Crile-Wood



15 cm

No. 12003-15



With tungsten
carbide jaws
15 cm

No. 12503-15

**TUNGSTEN
CARBIDE**

For more information
see page 183.



No. 12504-15

Mayo-Hegar



16 cm

No. 12004-16

18 cm

No. 12004-18

**Slim Elongated Needle Holder
with Tungsten Carbide Jaws**


Ryder Mini-Select Needle Holder

This needle holder has been uniquely fashioned with tungsten carbide dust tips, giving the clamping platform an extra secure grip.



Side View

With tungsten
carbide jaws
15 cm
No. 12005-15

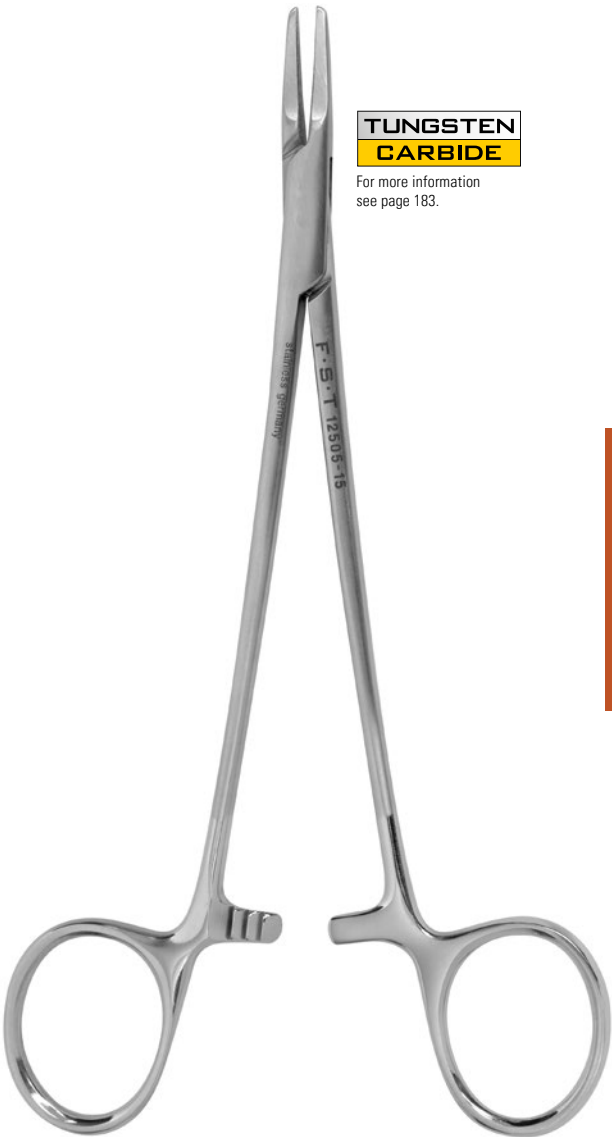

With tungsten
carbide dust tips
15 cm
No. 12505-15

NEEDLE HOLDERS

Microsurgical Needles with Suture Thread Attached

The combination of proprietary needle design technology and state-of-the-art manufacturing techniques has enabled S&T to provide a microsurgical needle that is unmatched in the industry. S&T microsurgical needles provide frictionless tissue penetration. They are inspected under the microscope at critical stages during the manufacturing process, and a multi-point final inspection of each suture and needle combination ensures a high quality product. The suture-to-needle attachment is tested to higher standards than the USP specifications.

Features:

- Needle and thread combination comprising of non-absorbable black nylon polyamide monofilament thread and stainless steel 3/8 circle needle. Nylon is suitable for closing ophthalmic, neurological and microvascular wounds.
- 3/8 circle precision taper point. Stainless steel needle honed under microscope by hand. Superfine round tip with flattened body to improve stability in needle holder. Easy penetration. Precise stitch placement.
- Grinding geometry and suture needle attachment are directed toward frictionless tissue penetration.
- Each needle suture combination is individually packed and sealed in a peel-open blister pack.

Sterile

Pkg. of 12 disposable units



400% of actual size

No. 12051-11




No. 12051-10



No. 12051-09



No. 12051-08

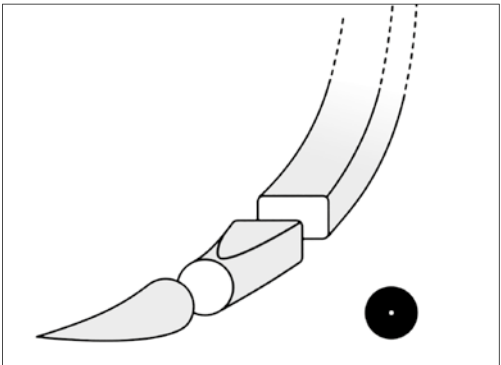

Standard taper point needle




Suture size	Suture length (cm)	Needle diameter (micron)	Needle diameter (mm)	Needle chord length (mm)	Circle	Arch (mm)	Item
11/0	10	50	0.05	3	3/8	3.8	No. 12051-11
10/0	10	70	0.07	3	3/8	3.8	No. 12051-10
9/0	15	100	0.1	4	3/8	5.1	No. 12051-09
8/0	15	140	0.14	5	3/8	6.4	No. 12051-08

Suture Needles

Polished stainless steel
3/8 curved
Round with standard eye
Diameter 0.35 mm
Suitable for sutures up to 0.32 mm diameter

Non-sterile

Pkg. of 12 needles



Size	Item
00	No. 12050-20
0	No. 12050-10
1	No. 12050-01
2	No. 12050-02
3	No. 12050-03

Silk Suture

Silk suture has a smooth flow through tissue while maintaining knot security.

Braided silk

Non-sterile



Size	Diameter (mm)	Spool length (m)	Item
7/0	0.05	91	No. 18020-70
6/0	0.08	23	No. 18020-60
5/0	0.12	23	No. 18020-50
4/0	0.17	23	No. 18020-40
3/0	0.22	23	No. 18020-30
2/0	0.32	23	No. 18020-20
0	0.37	23	No. 18020-00
1	0.45	23	No. 18020-01
2	0.55	23	No. 18020-02
3	0.65	23	No. 18020-03

For Suture Tying Forceps, see pages 76, 77 and 78.

Nylon Monofilament Suture

Nylon is known for its uniform diameter flexibility and outstanding consistent knot security.

Nylon monofilament

Non-sterile




Size	Diameter (mm)	Spool length (m)	Item
8/0	0.04	91	No. 18030-80
7/0	0.05	91	No. 18030-70
6/0	0.07	91	No. 18030-60
5/0	0.10	91	No. 18030-50
4/0	0.15	91	No. 18030-40
3/0	0.20	91	No. 18030-30

Suturing Principles and Techniques in Laboratory Animals

Introduces the basic principles, materials and surgical instruments required for suturing and wound closure used on animals. The manual provides descriptions and pictures portraying proper tissue handling and aseptic technique, correct hand placement and use of surgical instruments, proper needle placement on needle holders, and provides an in-depth explanation of various suture patterns and associated principles for proper knot tying during wound closure.

The DVD provides descriptive narrative and step-by-step video demonstrations for each of the suturing techniques.

Manual and DVD

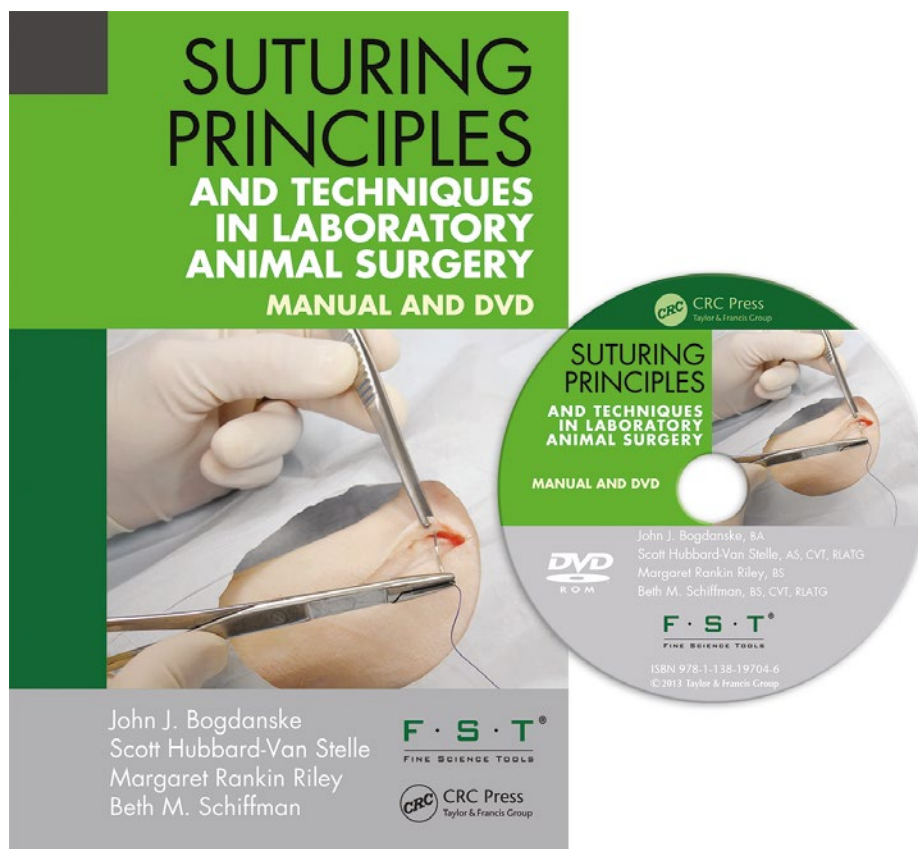


Includes: Fine Science Tools Item Number
Reference Page for all surgical instruments
used in the manual.

No. 23005-10

Michel Suture Clips

Anti-magnetic, acid-resistant
stainless steel
Pkg. of 1,000 clips

Size (mm)	Item
7.5 x 1.75	No. 12040-01
11 x 2	No. 12040-02
12 x 2.5	No. 12040-03

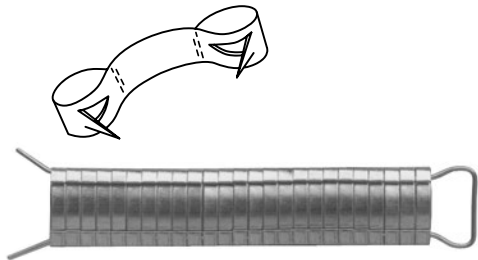

Applying Forceps



For all Michel suture clips
12.5 cm

No. 12018-12

Applying and Removing Instruments



For clip sizes 12040-02 and larger
Curved
13 cm

No. 12028-12



For clip size 12040-01 only
Angled
13 cm

No. 12029-12

SUTURE CLIPS

Reloadable Skin Stapler with Rotating Head

The 360° degree swivel nose and unique design offers maximum visibility at the delivery point. The stainless steel staples are non-sterile and feature a patented staple design which make for quick and easy removal. The disposable staple cartridge includes a printed staple counter.

The handle is reusable and autoclavable. Staples are non-sterile. Components sold separately or as a kit.

Disposable staple cartridge contains 35 316L stainless steel staples with printed staple counter

Reusable autoclavable handle


360° rotation

Trigger with full-stroke ratchet facilitates accurate staple placement

75% of actual size

Lightweight, ergonomic pistol grip handle

Staple Dimensions:



Staple, actual size:



Surgical staple kit

- 1 Handle
- 1 Remover
- 12 Disposable staple cartridges

No. 12030-20

Single disposable cartridge

35 staples per cartridge

No. 12030-22

12 disposable cartridges

35 staples per cartridge

No. 12030-23

Handle

No. 12030-01

Surgical Staple Remover

Compatible with Reloadable Skin Stapler with Rotating Head and Manipler® Skin Stapler.



75% of actual size

10 cm
No. 12030-04

Manipler® Skin Stapler

Quality, slim, lightweight design with consistent actuation and staple count indicator. **Disposable, sterile, and not autoclavable.**

15 cm


35 staples per cartridge

No. 12035-00



75% of actual size

Staple Dimensions:




Staple, actual size:



AutoClip® System

The AutoClip® System is a safe, secure method of wound closure. Faster and easier than suture, this system is perfect when staples may be too thin to provide adequate closure. **Non-sterile and not autoclavable. Components sold separately or as a kit.**


MOST
POPULAR

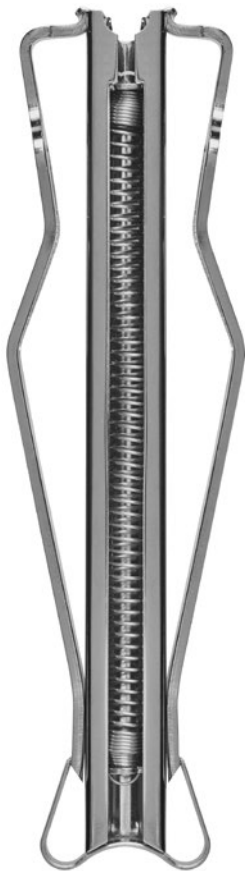

Applier



Clips

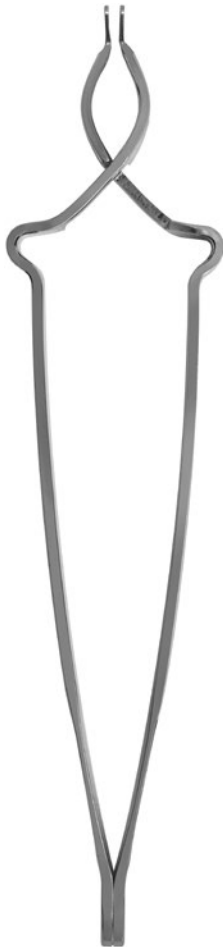

Remover

AUTOCLIP SYSTEM

AutoClip® Kit

- 1 Applier
- 9 mm clips (100)
- 1 Remover
- Storage case

No. 12020-00

AutoClip® applier
11.5 cm

No. 12020-09

AutoClip® 9 mm clips
Pkg. of 100 clips

No. 12022-09

AutoClip® remover
12.5 cm

No. 12023-00

Guthrie

Extra delicate pattern.

2.5 mm



2 Pronged
Blunt
13 cm

No. 17021-13

6 mm



2 Pronged
Blunt
13.5 cm

No. 17023-13

Blair

6 mm



4 Pronged
Blunt
13.5 cm

No. 17022-13

Fomon

13 mm



2 Pronged
2 mm Ball at each tip
17 cm

No. 17020-17

Slide Retractor with Blades



Maximum spread: 1 cm
Atraumatic blades
2 cm

No. 17004-03


Mini-Goldstein



Maximum spread: 0.5 cm
3x3 Sharp teeth
2 cm

No. 17002-02

Mini-Colibri



Maximum spread: 1 cm
2 cm

No. 17000-01

RETRACTORS



Slide Retractor with Teeth



Maximum spread: 1 cm
2x2 Blunt teeth
2 cm

No. 17005-03


Goldstein



Maximum spread: 1.8 cm
3x3 Sharp teeth
3 cm

No. 17003-03


Colibri



Maximum spread: 1.5 cm

3 cm
No. 17000-03

4 cm
No. 17000-04



Maximum spread: 1.2 cm

3 cm
No. 17000-02




Fine Adjustable Wire Retractor



Maximum spread: 3.5 cm
Thin, curved blades
5 cm

No. 17004-05


Agricola



Maximum spread: 3.5 cm
3x3 Sharp teeth
4 cm

No. 17005-04


Speculum



Maximum spread: 3.5 cm
Thin, curved blades and grooved finger grips
4.5 cm

Moria 7699
No. 17370-53

Alm Retractor with Wire Teeth



Maximum spread: 4 cm
Arms gently curved down
7 cm

No. 17010-07


Alm Retractor with Blunt Teeth



Maximum spread: 4 cm
Arms gently curved down
7 cm




Blunt teeth
No. 17008-07



Long blunt teeth
No. 17009-07


Alm Retractor with Blades




Maximum spread: 4.5 cm
Arms gently curved down
Thin, curved blades
7.5 cm

No. 17009-08

Spring-Loaded Retractor

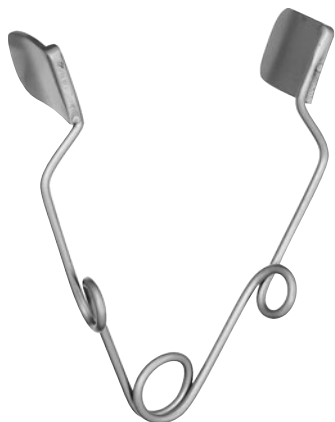


Curved atraumatic blades



Maximum spread: 3 cm
Blade dimensions: 14 x 10 mm
5.5 cm


No. 17006-05



Maximum spread: 4 cm
Blade dimensions: 22 x 16 mm
8 cm

No. 17007-08


Bowman



Maximum spread: 2.5 cm
8 cm

No. 17001-07


Heiss



Maximum spread: 2.3 cm
4x4 Blunt teeth
10 cm

No. 17011-10

Gelpi





Maximum spread: 3 cm
Angled down
1x1 Sharp teeth
10 cm

No. 17017-10

RETRACTORS


Weitlaner-Locktite

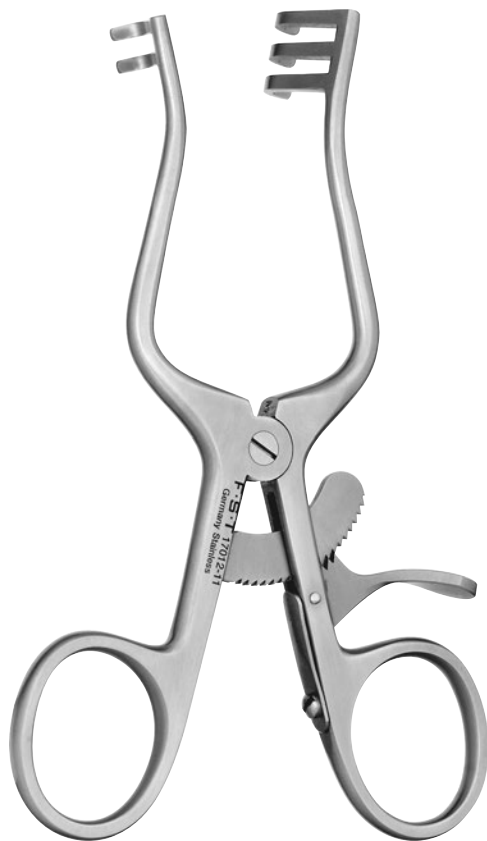

Maximum spread: 4.5 cm
2x3 Blunt teeth
11 cm
No. 17012-11


Maximum spread: 6.5 cm
3x4 Blunt teeth
13 cm
No. 17012-13

Wullstein



Maximum spread: 4.5 cm
Angled down
3x3 Blunt teeth
11 cm

No. 17018-11

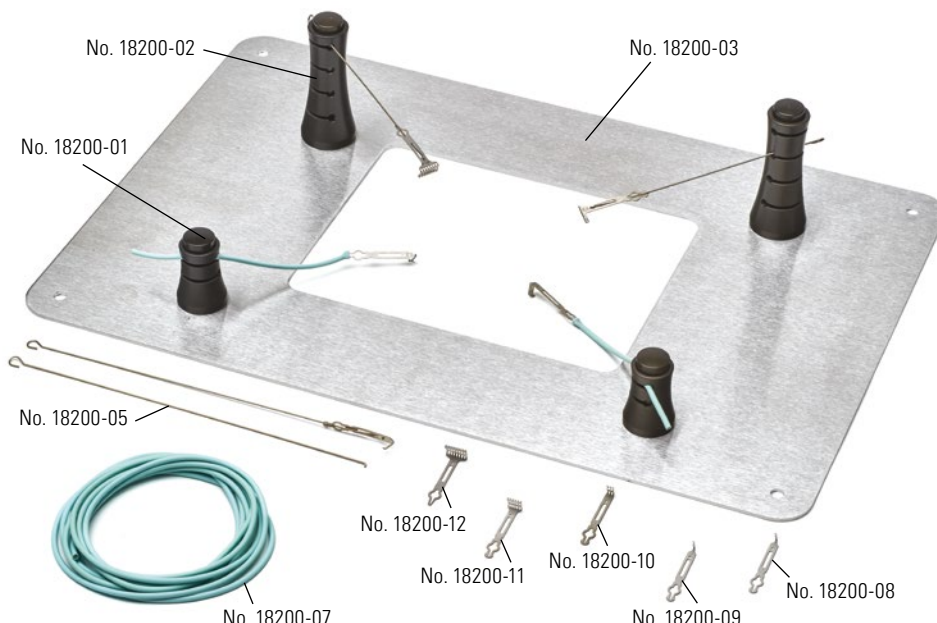

Magnetic Fixator Retraction System

This Small Animal Retraction System simplifies set-up procedure and provides the examiner with an excellent overview of the operative site. It consists of three components: **Base Plate** (Nos. 18200-03 & 18200-04); **Fixators** (Nos. 18200-01 & 18200-02); and **Retractors** (Nos. 18200-05 through 18200-12).

The **Base Plates** are made from magnetic stainless steel and are available in two sizes. The surface is nonreflective and both plates have a window in the center which allows the animal contact with body temperature control systems. The window sizes are 10 x 13 cm for the small base plate and 15 x 25 cm for the large.

The **Fixators** are movable anchors made from anodized aluminum with a surgical grade rare earth magnet in the base for attachment anywhere on the Base Plate. The magnets do not interfere with lab electronics and can be used in close proximity (3 cm) to ferro-magnetic items. They incorporate pushbutton-activated spring locks that grip either the Wire or Elastomer Retractors.

The **Retractors** are interchangeable Retractor Tips (Nos. 18200-08 through 18200-12) which attach to either Retractor Wire (Nos. 18200-05 & 18200-06) for static retraction or to Elastomer (No. 18200-07) for dynamic retraction. The Retractor Tips are light and atraumatic to delicate tissue or membrane.

All system components are autoclavable.

Kit for animals up to 200 g

Includes:

- 1 Small base plate (No. 18200-03)
- 2 Short fixators (No. 18200-01)
- 1 Tall fixator (No. 18200-02)
- 1 Elastomer, 2 m roll (No. 18200-07)
- 1 Package of retractors, blunt, 1 mm wide (No. 18200-09)
- 1 Package of retractors, blunt, 2.5 mm wide (No. 18200-10)

No substitutions

No. 18200-20

Kit for animals from 200 g up to 5 kg

Includes:

- 1 Large base plate (No. 18200-04)
- 2 Short fixators (No. 18200-01)
- 2 Tall fixators (No. 18200-02)
- 1 Elastomer, 2 m roll (No. 18200-07)
- 1 Package of retractors, blunt, 2.5 mm wide (No. 18200-10)
- 1 Package of retractors, blunt, 5 mm wide (No. 18200-11)

No substitutions

No. 18200-50

Individual parts:

Short fixator, 2.5 cm high

Each

No. 18200-01

Tall fixator, 5 cm high

Each

No. 18200-02

Small base plate, (20 x 30 cm)

Each

No. 18200-03

Large base plate, (25 x 35 cm)

Each

No. 18200-04

Wire handles, 10 cm long

Pkg. of 10

No. 18200-05

Wire handles, 14 cm long

Pkg. of 10

No. 18200-06

Elastomer, 2 m roll

No. 18200-07

Sharp retractors

Pkg. of 10

No. 18200-08

Blunt retractors, 1 mm wide

Pkg. of 10

No. 18200-09

Blunt retractors, 2.5 mm wide

Pkg. of 10

No. 18200-10

Blunt retractors, 5 mm wide

Pkg. of 10

No. 18200-11

Blunt retractors, 7.5 mm wide

Pkg. of 10



No. 18200-12

Clamp Size and Clamp Pressure

Clamp pressure is determined by the closing force of the clamp (in grams), divided by the area of the vessel wall that is compressed between the jaws (in square millimeters). Thus, the smaller the vessel, the higher the pressure exerted.

Despite the wide range of closing forces, the pressure exerted by each clamp, big or small, remains consistent throughout the series. Each size of clamp exerts a pressure of 5g/mm² when used on the largest vessel in its range, and 15g/mm² when used on the smallest vessel. Even at the higher range, S&T's micro clamps have the gentlest working pressure of any small vessel clamp available.

Clamp (ea)	L x W (mm)	Vessel Diameter Range (mm)
00396-01 & 18040-11	3.5 x 1.0	0.4 - 1.0 ◦ ◦
00398-02 & 18040-22	5.5 x 1.5	0.6 - 1.5 ◦ ◦
00400-03 & 18040-33	7.5 x 1.75	1.0 - 2.25 ◦ ◦
00325-00	10 x 2.15	2.0 - 5.0 ◦ ◦

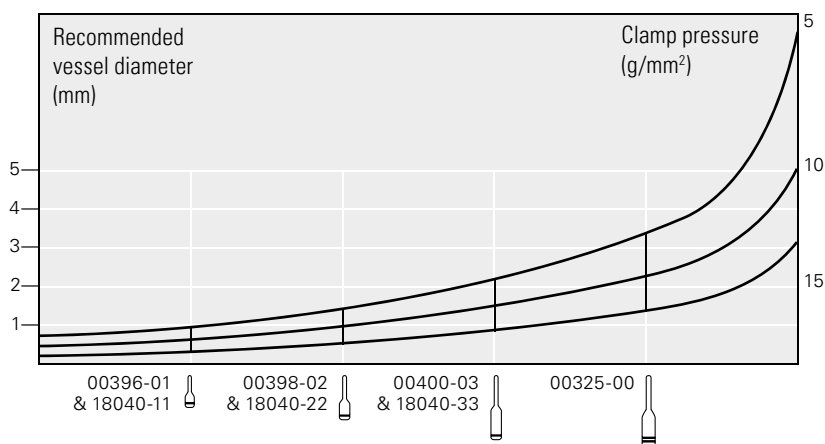

See page 131 for Micro Clamp and Double Clamp Appliers.

Micro Clamps

S&T®



S&T B-1
No. 00396-01



S&T B-2
No. 00398-02



S&T B-3
No. 00400-03



S&T HD-S
No. 00325-00

Double Micro Clamps

For vascular approximation at anastomosis. These clamps are mounted on a 10 mm sliding bar and can easily be moved by applying gentle force. The distance between the jaws of the clamps is adjustable from 3 to 16 mm.



No. 18040-11



No. 18040-22



No. 18040-33

Micro Clamp Applying Forceps




S&T®

Only compatible with
S&T Micro Clamps
14 cm

With lock
No. 00071-14

Without lock
No. 00072-14

Micro Clamp Applying Forceps

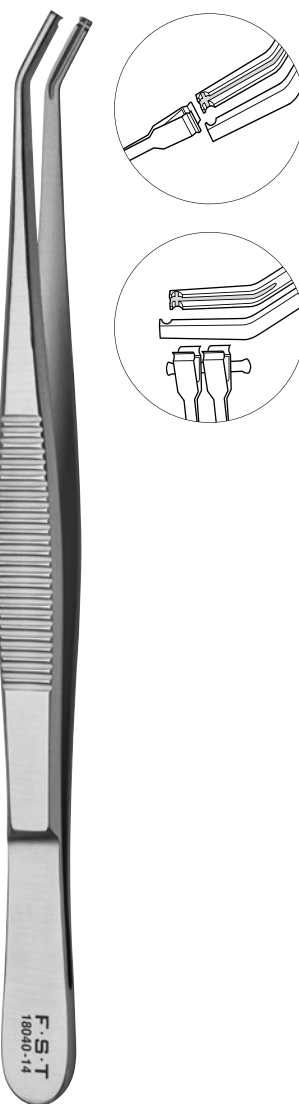

Compatible with S&T
Micro Clamps and
Double Micro Clamps
14.5 cm

No. 18040-14

Micro Clip Applicator
with Lock

Forceps Style Clip Applicator

This applicator features special U-shaped side supports for improved seating of the clips.

Stainless Steel Micro Serrefines

Used to obtain a clear surgical field for extended arterial cross-clamping.

Delicate atraumatic serrations
Spring width: 2 mm

MOST
POPULAR



	No. 18055-01	-02	-03	-04
Jaw length (mm)	10	8	6	4
Jaw width (mm)	2	2	1	0.75
Total length (mm)	19	16	15	13
Jaw pressure (g)	60	85	100	125



	No. 18055-05	-06
Jaw length (mm)	6	4
Jaw width (mm)	1	0.75
Total length (mm)	17	16
Jaw pressure (g)	100	125

Titanium Micro Serrefines

TITANIUM

Lightweight with strong
clamping pressure.

For more information
see page 183.

Delicate atraumatic serrations
Spring width: 2 mm



	No. 18555-01	-02	-03	-04
Jaw length (mm)	10	8	6	4
Jaw width (mm)	2	2	1	0.75
Total length (mm)	19	16	15	13
Jaw pressure (g)	60	85	100	125


Cautionary note: Micro Serrefines should never be compressed with fingers; use only the appropriate applicator No. 18056-14 or No. 18057-14.



MOST
POPULAR

For use with our
18055 series
micro serrefines
14 cm

No. 18056-14



For use with our
18055 series
micro serrefines
14 cm

No. 18057-14

Moria Vessel Clamp

Finely serrated (atraumatic)
Light pressure
For vessels up to 2 mm in diameter
Calibrated to 15g/mm²
1.8 mm wide, 3 cm long
Straight
33 mm



Moria 201/A
No. 18320-11



Moria Bulldog Type Clamps

Non-serrated
Strong pressure
2 mm wide
53 mm



Straight
Moria MC43
No. 18374-43



Curved
Moria MC44
No. 18374-44



Dietrich Bulldog Clamps

Serrated
Good access to deep seated vessels
Closing pressure: 50 g (light)
Weight: 3 g



Straight
52.5 mm
No. 18038-45



Angled
50 mm
No. 18039-45

Bulldog Type Serrefines

Serrated

Straight
Medium pressure
28 mm
No. 18050-28



Curved
Medium pressure
28 mm
No. 18051-28



Straight
Strong pressure
35 mm
No. 18050-35



Straight
Strong pressure
50 mm
No. 18050-50

MOST POPULAR

Curved
Strong pressure
35 mm
No. 18051-35



Curved
Strong pressure
50 mm
No. 18051-50

Schwartz Micro Serrefines

Non-serrated
Strong pressure
26 mm

MOST POPULAR

Straight
No. 18052-01



Light bend
No. 18052-02



Sharp bend
No. 18052-03



Mini Serrefines

Smallest bulldog-type hemostatic clamps
Medium pressure
Gentle serrations
2 mm wide
28 mm

Straight
No. 18054-28



Curved
No. 18053-28



Bulldog Artery Spring Clamp

Can be used with a minimum of distortion for MRI investigations.

Straight
Serrated
Light pressure
30 mm



TITANIUM

For more information
see page 183.

No. 18144-30



Silver Neuro Clips

These single-use, silver neuro clips are meant for permanent vessel occlusion.

Pkg. of 100 clips
No. 18040-00

Vascular Occluders

Applications

- Fast, dependable zero-flow baseline determination in blood flow studies.
- Partial to full occlusion of vessels for circulation research studies.
- Prolonged implantations, such as chronic blood flow studies.
- Constriction of soft organs in acute or chronic applications.

Operation


- Step 1** Apply the occluder cuff around the exposed blood vessel. Secure it in place with suture material through the eyelets.
- Step 2** Occlude the vessel to the desired degree by inflating the diaphragm with air or liquid injected into the actuating tube using a syringe and blunt needle. Clamp the tubing to maintain occlusion of the vessel over time.
- Step 3** To deflate, simply withdraw the air or liquid.

Benefits


- Occlusion is accomplished without traction on vessels or surrounding tissues.
- The actuating tube may be exteriorized from the occlusion site for remote actuation.
- Performance during implantations is reliable and consistent.
- Autoclavable or cold sterilized, and easily maintained.
- Made from soft, flexible 100% silicone rubber.
- Fully operational with instant response using air, liquids, or inert gases.

Selection

The lumen diameter when deflated is usually the determining factor in the selection of the proper device. Select the occluder size that provides a slightly loose fit around the subject vessel. The cuff width and thickness will vary, depending on models and sizes.

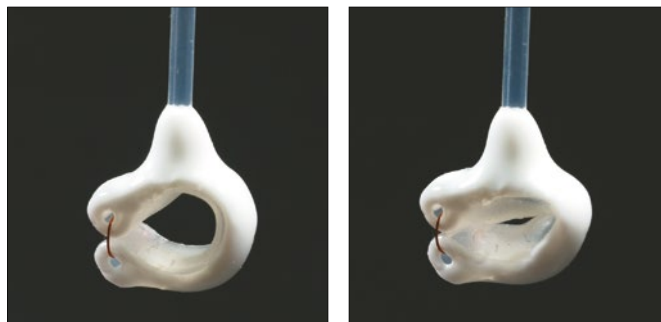

The actuating tube length is 90 cm and measures 0.76 mm ID x 1.6 mm OD. Detailed instructions are included.

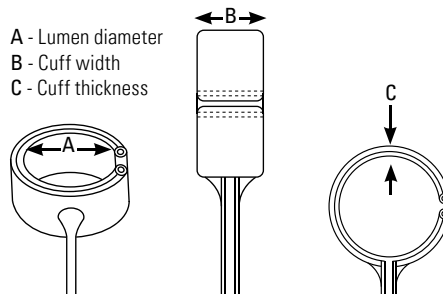

VO-1.5 N

Lumen diameter: 1.5 mm
Cuff width: <3.5 mm
Cuff thickness: 1.5 mm

No. 18080-01

VO-2

Lumen diameter: 2 mm
Cuff width: 5 mm
Cuff thickness: 1.5 mm

No. 18080-02

VO-3

Lumen diameter: 3 mm
Cuff width: 5 mm
Cuff thickness: 1.5 mm

No. 18080-03

V-Hook

Aids in feeding fine suture around blood vessels, works very similar to ligation aids.



400%

Tip diameter: 0.4 x 0.2 mm
11 cm

No. 18052-12

Ligation Aids

A handy instrument for leading a fine suture under and around a blood vessel for tying-off purposes. Also useful for ligating peripheral nerves. Grooves toward hole help threading.



150%

Ultrafine
Hole diameter: 0.4 mm
10.5 cm

No. 18062-12



150%

Hole diameter: 1 mm
13.5 cm

No. 18062-13



150%




Hole diameter: 1 mm
13.5 cm

No. 18063-13

Vessel Dilators

Highly modified forceps with elongated, parallel tips which are highly polished. Designed for controlled intraluminal vessel dilation.



DILATORS



Angled 10°
11 cm

Tip diameter: 0.1 mm
No. 00126-11

Tip diameter: 0.2 mm
No. 00125-11



Angled 45°
13.5 cm

Tip diameter: 0.2 mm
No. 00276-13



Angled 10°
12 cm

Tip diameter: 0.1 mm
No. 18131-12

Tip diameter: 0.2 mm
No. 18132-12

Balanced Instruments

Balanced instruments are designed to put the center of gravity between the thumb and index finger. This is accomplished by adding a slight counter weight to the proximal end of the instruments. The design enhances tactile feel, aiding in better control and precision.

Vessel Dilators

The tips of these multipurpose forceps are configured to enable their use as dilators at the front, as well as needle holders and tying forceps further in the back. The platform at the tips close parallel ensuring a reliable grip.

Vessel Dilator



86% of actual size



Straight
Suture tying platform
Tip diameter: 0.1 mm
14.5 cm

No. 18601-15



86% of actual size




Straight
Suture tying platform
Tip diameter: 0.3 mm
15 cm

No. 18602-15



86% of actual size



Angled
Smooth
Tip diameter: 0.2 mm
14.5 cm

No. 18603-14

Micro Cannulation System

This micro cannula is most helpful for quick and easy insertion in arteries and veins. It can be used as an “indwelling” catheter during long term experiments. With care, thorough rinsing and sterilization, it can be reused several times. Detailed instructions are included.



Features

- Biocompatible Teflon® tubing.
- Cannula size 0.33 mm OD – 0.16 mm ID
- A pointed stainless steel stylus (trocar), to aid in vascular penetration and allow a maximum range of cannula manipulation during insertion.
- Contoured tip for easy insertion, fitted with shoulder for “tie-in” to prevent accidental removal.
- Female luer connection for linkage to infusion lines.

8 cm

No. 18000-10




1 Approach

Cannulation Forceps (Item No. 18403-11) and Spinal Cord Hook (Item No. 10162-12) aid in the insertion process.



2 Insertion

Remove trocar and advance cannula.

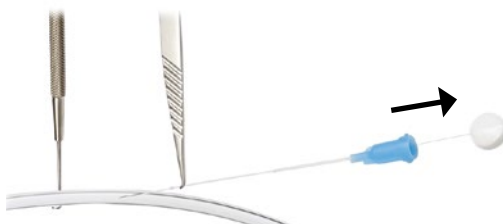

3 Secure


Use shoulder hub and suture to “tie in” cannula to prevent accidental removal.



Instruments sold separately.

Vessel Cannulation Forceps

These vessel cannulation forceps are useful whenever a fine plastic tube has to be introduced into a small blood vessel of almost equal size. The hollowed jaws hold the tubing securely without deforming it. The tip of the tubing is directed exactly into the vessel opening without damage to the vessel from unwanted movement.



S&T®

For tubing between
0.5 and 1 mm OD
11 cm

No. 00574-11



DUMONT
S W I S S M A D E

For tubing of 0.35 mm OD
11 cm
No. 11280-11

For tubing of 0.5 mm OD
11 cm
No. 11281-11

For tubing of 1 mm OD
11 cm
No. 11282-11



For tubing of 0.35 mm OD
11.5 cm
No. 18403-11

For tubing of 0.6 mm OD
11.5 cm
No. 18406-11

For tubing of 0.6 mm OD
13.5 cm
No. 18406-13

CANNULATION




Surgical & Laboratory Accessories

Animal Accessories	Pages	141 – 143
Instrument Care & Accessories	Pages	144 – 155
Surgical Accessories	Pages	156 – 159
Laboratory Accessories	Pages	160 – 171



Reusable Gavage Feeding Needles

Stainless steel feeding needles with luer lock hub. Also ideal for transcardiac perfusions with a fixative.

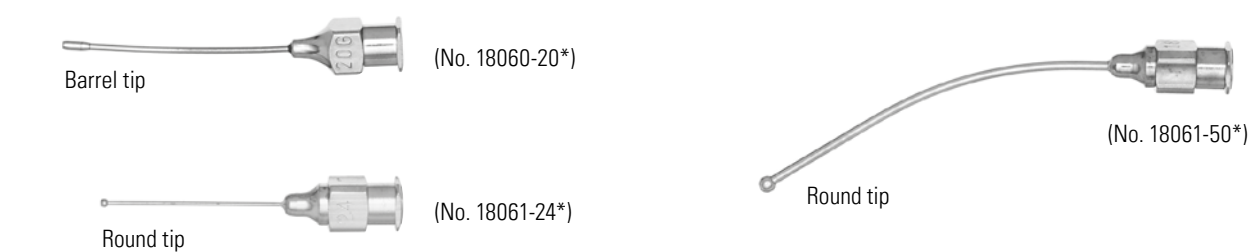


Gauge	Length (mm)	Tip diameter (mm)	Shape	Mice	Rats	Guinea pigs	Item
24	25	1.25	Straight	>14 g			No. 18061-24*
22	25	1.25	Straight	15-20 g			No. 18061-22*
20	30	Barrel	Straight	20-25 g		50-75 g	No. 18060-20*
20	38	2.25	Straight	20-25 g		50-75 g	No. 18064-20
20	38	2.25	Curved	20-25 g		50-75 g	No. 18065-20
18	38	2.25	Straight	20-30 g	100-200 g	250-300 g	No. 18061-38
18	50	2.25	Curved	25-30 g	100-200 g	250-300 g	No. 18061-50*
16	75	3.00	Curved		150-300 g	350-450 g	No. 18061-75
16	100	3.00	Curved		150-300 g	350-450 g	No. 18061-10

* MOST POPULAR

Single Use Gavage Feeding Needles

These economical feeding needles feature plastic luer hubs with silicone tips. They are nontoxic and nonpyrogenic. Needles can be easily formed to any desired shape. **Sterile.**

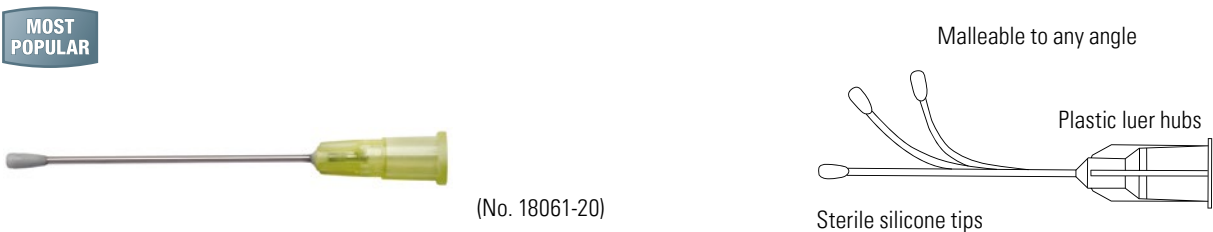

Pkg. of 5 needles

Gauge	Length (mm)	Tip diameter (mm)	Shape	Mice	Rats	Guinea pigs	Item
20	38	1.75	Flexible	20-25 g	50-75 g		No. 18061-20
18	50	2.50	Flexible	25-30 g	100-200 g		No. 18061-18
15	75	3.00	Flexible		200-350 g	400-600 g	No. 18061-15

GenoPunch

The interchangeable GenoPunch aids in the fast and simple collection of the 2 mm tissue sample for DNA analysis and/or genotyping. FST Exclusive Item. **Autoclavable.**



80% of actual size

GenoPunch includes:

- 1 GenoPunch
- 1 0.5 ml tube holder
- 1 1.6 ml tube holder
- 1 Screwdriver
- 4 Screws



FST does not supply microtubes.

Stainless steel and anodized aluminum
Punch diameter: 2 mm
11.5 cm

No. 24215-02

**MOST
POPULAR****Ear Punch**

Designed to ensure a fast and clean punch, this ear punch is lightweight and fits comfortably in the palm of your hand. FST Exclusive Item. **Autoclavable.**



80% of actual size

Stainless steel and
anodized aluminum
Punch diameter: 2 mm
11.5 cm

No. 24214-02

Finger Loop Ear Punch

This ear punch provides stability and control for researchers using the numbering system. The 1 mm ear punch offers greater numbering variations and/or patterns.



80% of actual size

10.5 cm

Punch diameter: 1 mm
No. 24212-01

Punch diameter: 2 mm
No. 24212-02

Self Piercing Ear Tags

Ideal for use in small animals such as mice and rats, these ear tags come numbered from 1-100 or 1-500. Silver colored tags with black numbers provide high visibility making them easy to read. Once applied, tags seal and cannot be removed, providing an easy to use, permanent identification method. These ear tags are safe for use in salt water.




Ear tags
Alloy: Monel
7.8 x 2.8 mm

Black numbers 1-100
No. 24220-10


Black numbers 1-500
No. 24220-50

Black numbers 501-1000
No. 24220-90

**NEW
ITEM**



Ear Tags (enlarged view)

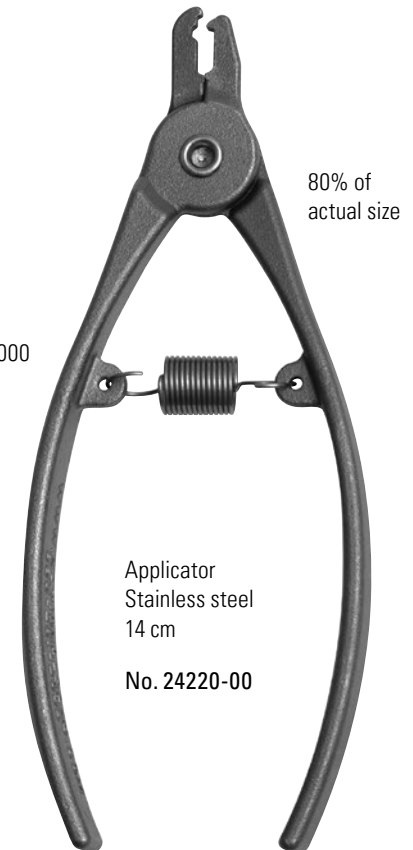

80% of
actual size

Applicator
Stainless steel
14 cm

No. 24220-00

Animal Microtattoo System

A quick, efficient and affordable method of permanently identifying laboratory animals (mice as early as 1 day old). Designed and tested by laboratory animal technicians, the system utilizes a hypodermic needle at one end of a stainless steel forceps and a small metal cup containing green tattoo paste at the other side of the forceps.

By squeezing the forceps together, the needle penetrates the toe, footpad or ear of the animal and injects a deposit of green tattoo paste into the animal. A grid location pattern provided enables a numbering system that extends over 1 million.

Use of the microtattoo system is humane and in compliance with regulatory agencies for the care and use of laboratory animals. Detailed instructions are included. **Both the microtattoo forceps and green tattoo paste are autoclavable.**

Animal microtattoo system includes:

- 1 Pair plated steel microtattoo forceps
- 1 Tube (1 oz.) of green tattoo paste
- 1 Aluminum planchette
- 2 Hypodermic needles
- 1 Plastic holding case



55% of
actual size

Animal microtattoo system
13 cm

No. 24201-00



Green tattoo paste
1 oz / 29.6 ml

No. 24201-01



Silicone Seal and Lubricant

This stiff non-melting silicone base maintains its consistency from -40°C to 200°C (40°F to 392°F) with less than 2% evaporation after 24 hours of exposure to 150°C (302°F). Typical applications include lubrication of stopcock rotating parts and other lab items. Seals vacuum and low pressure systems. Compatible with glass, plastics, metals, synthetic rubber gaskets and seals. **Autoclavable.**

15 ml container
No. 29051-45

Demagnetizer

This safe and easy to operate tabletop demagnetizer has a large coil opening of 8 x 4 cm in a rigid, molded housing. Can be used to demagnetize or magnetize instruments.

12 x 5.5 x 9 cm

No. 18000-15



European version differs from photo.


Instrument Sharpening Stones

Natural Arkansas oil stones feature unequaled fineness, hardness and structural density. When used with mineral oil, they will produce a sharper cutting edge.

6 mm x 9 cm

Square stone
No. 29008-01

Triangular stone
No. 29008-12

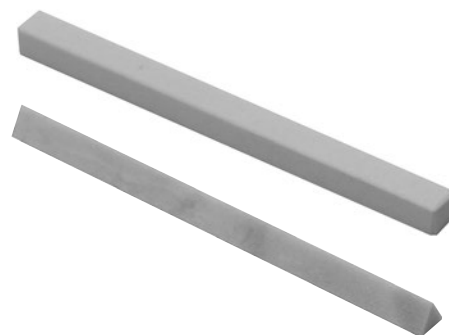

Instrument Oil and Oil Pen

Physiologically inert oil for lubricating surgical instruments, box locks, ratchets and any overlapping joints. Oil pen is refillable.

50 ml bottle
No. 29055-00



7 mm needle
12.5 cm

12 ml oil pen
No. 29055-12



Sharpening Stone for Fine Forceps

This natural Arkansas stone assists in reshaping the tips of fine forceps. The stone has two grooves, 0.8 mm and 1.6 mm, and comes in a cedar box with ten O-rings.

4 x 1 x 10 cm

No. 29008-22



Fine Forceps Repair Kit

Realign and repair fine forceps with this convenient kit. Bent forceps tips can be restraightened with the chain nose pliers. The sharpening stone has two grooves, 1.6 mm and 0.8 mm, to assist in reshaping the forceps tips. O-rings clamp the forceps shut to ensure that both shanks are equally aligned and sharpened. Instrument oil assists in producing a smooth sharp edge. Detailed instructions are included.

Kit includes:

- 1 Sharpening stone for fine forceps with ten O-rings (No. 29008-22)
- 1 Instrument oil, 50 ml bottle (No. 29055-00)
- 1 Chain nose pliers

No. 29000-00

**MOST
POPULAR**

Optical Cleaning Kit and Lens Paper

This convenient kit contains everything you need to clean lens surfaces safely. Perfect for microscopes, camera lenses, binoculars, telescopes, graphic art optics, and all other fragile lenses. Storage case included.

Kit includes:

- 1 Bottle of lens cleaner (30 ml)
- 1 Ultra soft duster brush
- 1 Cleaning cloth (20 x 20 cm)
- 3 Books of lens paper (25 sheets each)

Kit

No. 29000-10

Lens Paper

15 x 10 cm

Book of 50 sheets

No. 29015-50



Instrument Marking Tape

Organize instruments quickly and easily with this economical, non-toxic, pressure sensitive tape. Color is unaffected by boiling, cold sterilization or autoclaving. 8 colors available. **Autoclavable.**

Material: Vinyl
290 x 0.6 cm (each roll)



Green
No. 29071-01



Blue
No. 29071-02



Yellow
No. 29071-03



Red
No. 29071-04



White
No. 29071-05



Black
No. 29071-06



Brown
No. 29071-07



Orange
No. 29071-08

Instrument Marking Tape 8 Assorted Colors

Organize instruments quickly and easily with this economical, non-toxic, pressure sensitive tape. Color is unaffected by boiling, cold sterilization or autoclaving. Includes 8 assorted color rolls: Yellow, Red, Black, White, Green, Brown, Blue and Orange. **Autoclavable.**


Material: Vinyl
107 x 0.6 cm (each roll)

No. 29080-00



Instrument Tip Protectors

These tip protectors are a convenient, color-coded way to protect surgical instrument tips and edges. They provide exceptional protection and are vented to prevent rusting from condensation. Instrument tip protectors are recommended during handling, storage, and sterilization. **Autoclavable.**
Material: Plastisol

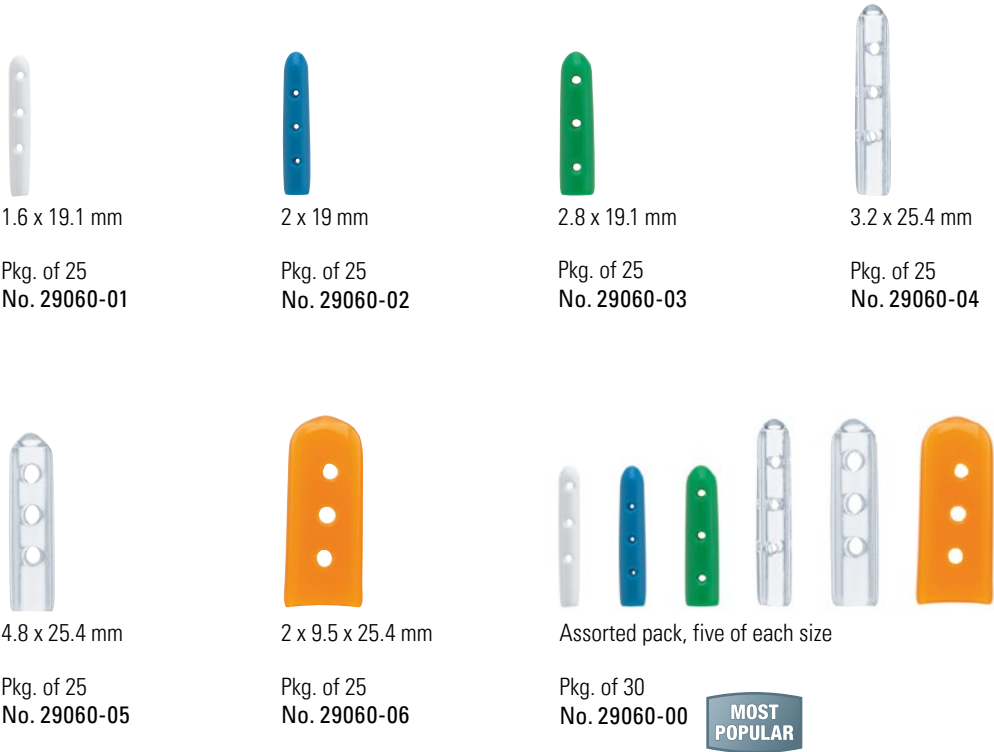

Double Tip Protectors

These vented tip protectors are designed to hold hemostats and rongeurs firmly while allowing the jaws, box hinge and tips to stay open for thorough sterilization. **Autoclavable.**
Material: Plastisol



Self Sealing Sterilization Pouches

Preformed pouches with self adhering tape are blue tinted on one side for visualization of contents, and paper-backed on the other side. Pouches will work with either steam autoclave or ethylene oxide sterilization.

Advantages:

- Protects instruments during sterilization.
- Provides sterile storage until use.
- Write on pouches for easier identification during sterilization.



10 x 18 cm
For instruments up to 13 cm long

Pkg. of 100 pouches
No. 28000-07

13 x 26 cm
For instruments up to 23 cm long

Pkg. of 100 pouches
No. 28000-10

18 x 30 cm
For instruments up to 26 cm long

Pkg. of 100 pouches
No. 28000-12

Hot Bead Sterilizer

The sterilizer provides a safe, effective and convenient method for sterilizing your surgical instruments prior to and during surgery or tissue culture. Without using potentially dangerous gases, flames or chemicals, you can ensure that your instruments will be free of pathogens and microbial contaminants.

The beads take 15–20 minutes to reach 240°C to 270°C (464°F to 518°F), and then the sterilizer is ready for use. The temperature is thermostatically maintained, and the unit can be left on all day. Instruments require approximately 20 seconds of contact with the beads for complete sterilization. The sterilizer is safe to use even in laminar flow hoods.

Sterilization test results conducted by the Pasteur Institute in Lille, France, are available upon request. Available in 110V and 220V. CE Certified and UL Approved.

Sterilizer includes:

- Sterilizer unit
- 2 Bags of glass beads
- 1 Dust cover for well
- 1 Small heat-tempered glass dish for small objects (only with FST 250)



FST 250 shown.
Instruments not included.

STERILIZER

FST 250 Sterilizer

Well diameter: 4 cm
Well depth: 8 cm
Well volume: 100 ml
Total unit size: 14.5 x 12.5 x 13.5 cm

No. 18000-45

Replacement glass beads for FST 250
No. 18000-46

FST 350 Sterilizer

Well diameter: 4 cm
Well depth: 14 cm
Well volume: 175 ml
Total unit size: 20.5 x 12.5 x 13.5 cm

No. 18000-50

Replacement glass beads for FST 350
No. 18000-51

Autoclave Tape Dispenser

Easy loading core with heavy duty steel construction and a non-skid base. Serrated cutting blade cuts tape fast and cleanly.




Coated steel
23.5 cm

Tape sold separately.

No. 28001-00

Autoclave Tape

Tape will permanently indicate diagonal stripes after exposure to steam autoclave temperature between 121°C and 130° C during a 40-60 minute time period. Use with sterilization pouches, sterilization wraps and sterilization cases.



2 cm x 55 m

No. 28001-02

Surgical Skin Marker

This marker features a versatile tip for precise fine (0.2 mm) line marking, or when held at an angle, a broad (2 mm) line marking.

The marker's violet ink is nontoxic, non-tattooing and surgical prep-resistant. Markings can be removed from the skin with isopropyl alcohol. A six-inch ruler calibrated in both centimeters and inches is included.

14 cm


No. 18000-30



80% of actual size

Silicone Mat

High quality, extra soft mat for safe and secure placement of delicate instruments. This mat can easily be cut along the premarked grooves to fit in various sized instrument cases. **Autoclavable.**

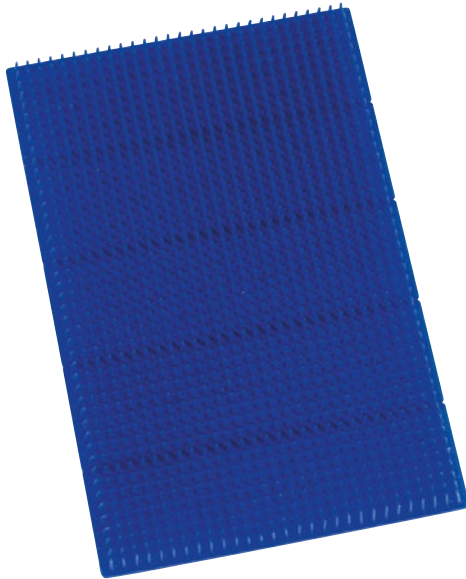

30 x 20 cm

No. 20325-00

Magnetic Sterilization Mat

Used during sterilization and for safe anti-slip placement around surgical settings. **Autoclavable.**



Instruments not included.

30 x 20 cm


No. 20350-00

Silicone Mat

Large, economical silicone mat.
Autoclavable.

46 x 25 cm

No. 20325-10

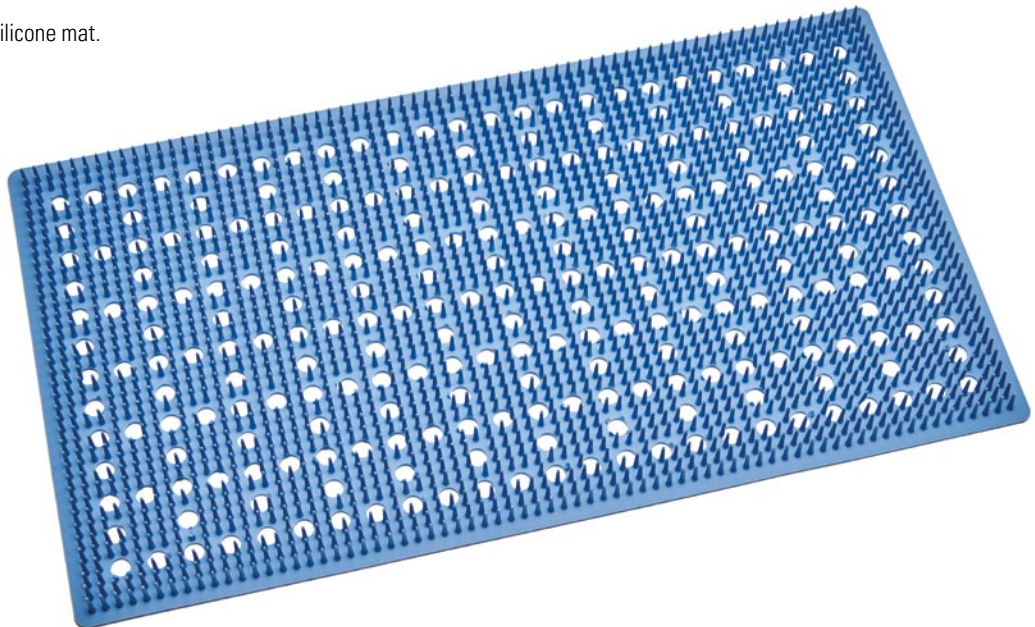


Sterilization Container

This plastic sterilization container includes a silicone mat for safe placement of instruments. Perforated top is clear for visual identification of instruments. **Suitable for autoclave or ethylene oxide sterilization.**



19 x 10 x 2 cm
No. 20810-01

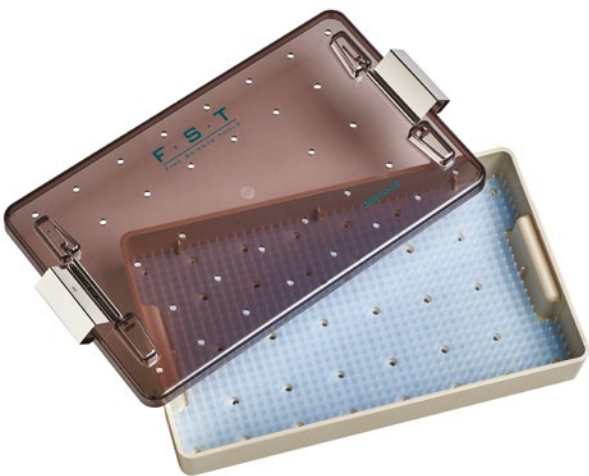

27 x 16 x 4 cm
No. 20810-02



Two Tiered Sterilization Container

This plastic sterilization container has two tiers of silicone slots that will accommodate up to 12 different instruments. Hinged top and bottom lock tight. Container is perforated. **Suitable for autoclave or ethylene oxide sterilization.**

25 x 12 x 3 cm
No. 20820-00

Disposable Sterilization Wraps

These biodegradable cellulose fiber wraps are resistant to tears and conform easily to maintain a breathable yet impervious barrier to airborne bacteria, saline, blood and water. Wrapping your instrument case securely will ensure the sterility of your instruments until ready for use. Available in two sizes.



38 x 38 cm
Pkg. of 25 wraps
No. 28015-15




51 x 51 cm
Pkg. of 25 wraps
No. 28020-20

Cases not included.

Sterilization Container

This sterilization container is made from Ultem® polymer to ensure strength and long lasting durability. The transparent perforated lid provides easy identification of your surgical instruments. Silicone mat is included for a safe and secure hold. Trays are also stackable for convenience. **Suitable for autoclave or ethylene oxide sterilization.**

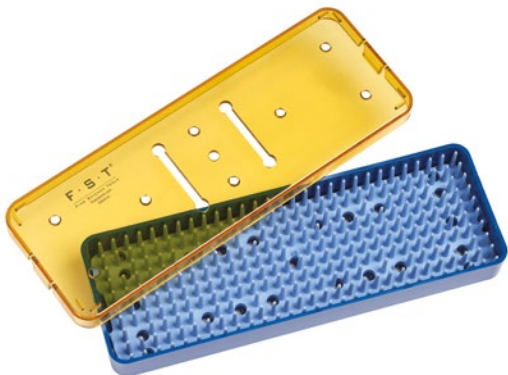


Single tier
19 x 7 x 2 cm

No. 20840-01




Single tier
17 x 10 x 2 cm

No. 20840-02

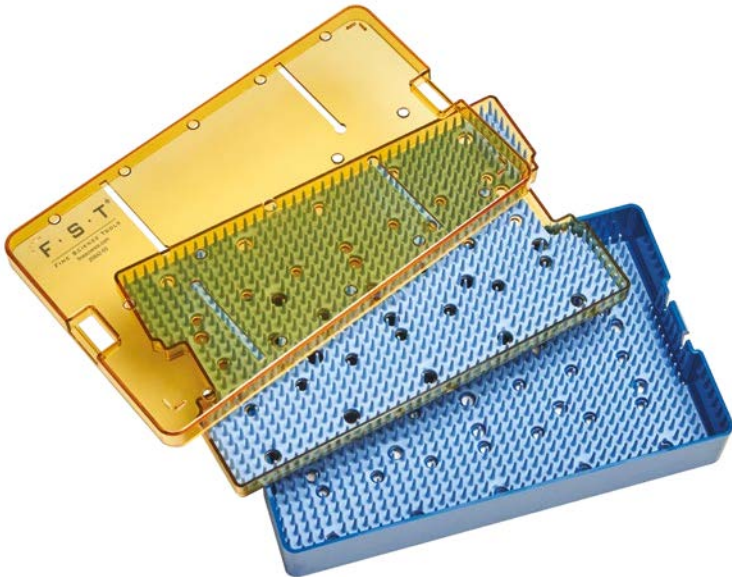

Double tier
25 x 15 x 4 cm

No. 20842-03

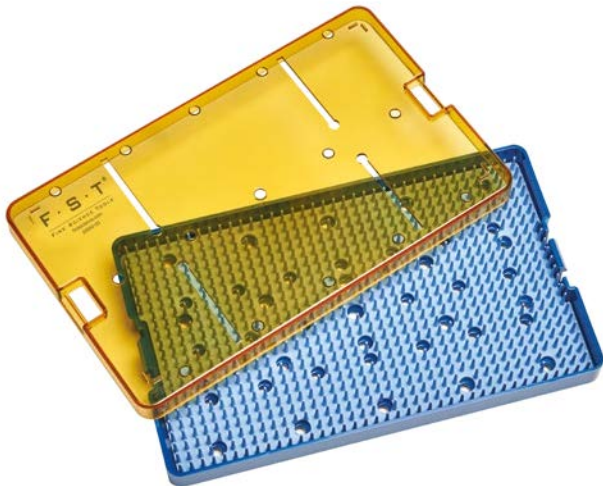

Single tier
25 x 15 x 2 cm

No. 20840-03

MOST
POPULAR

CASES

Dual Clamping Stainless Steel Sterilization Container

This container will assist in the sterilization and storage of your fine surgical instruments. It comes with a custom fit silicon mat and one single-use filter for keeping the instruments sterile while they remain in the container. **Suitable for autoclave or ethylene oxide sterilization.**



30 x 14 x 4 cm

No. 20850-00

5 Long-term textile filters
No. 20850-10

Stainless Steel Sterilization Container

Removable perforated interior plates hold long-term textile filters which keep the instruments sterile while they remain in the container. Lid can be locked in place. Comes with two textile filters installed. **Suitable for autoclave or ethylene oxide sterilization.**



20 x 10 x 4 cm

No. 20890-51

10 Long-term textile filters
No. 20890-72

Utility Instrument Case

Comes with a silicone mat for safe placement of instruments. **Case and silicone insert are autoclavable but should not be used for sterilizing surgical instruments.**

18 x 9 x 3 cm

No. 20311-21

MOST
POPULAR

Moria



Instrument Case

This plastic case is compact, safe, secure, and slotted for placement of individual surgical instruments, aiding in the prevention of tip damage. Seven colors available.

Case is autoclavable but should not be used for sterilizing surgical instruments.

17 x 8 x 2 cm

MOST
POPULAR



Instruments not included.




Blue

No. 20830-00



Green

No. 20830-01



Clear

No. 20830-02



Yellow

No. 20830-03



Pink

No. 20830-04



Orange


No. 20830-05



Purple

No. 20830-06

CASES

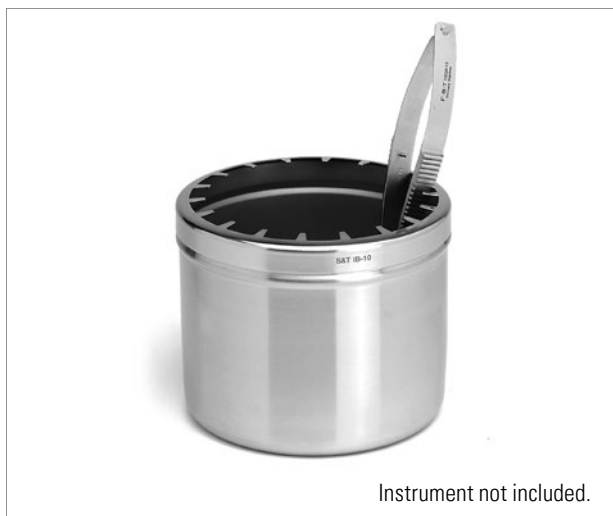

Instrument Beaker with Silicone Bottom


Instruments are placed in the beaker with their tips immersed in distilled water when not in immediate use. This keeps the instruments clean and functional and ready to grasp. The instrument tips are protected from damage by the soft silicone rubber bottom. Segmented lid keeps instruments organized and secure.

Diameter: 10 cm

Height: 8 cm

No. 00081-00

S&T®

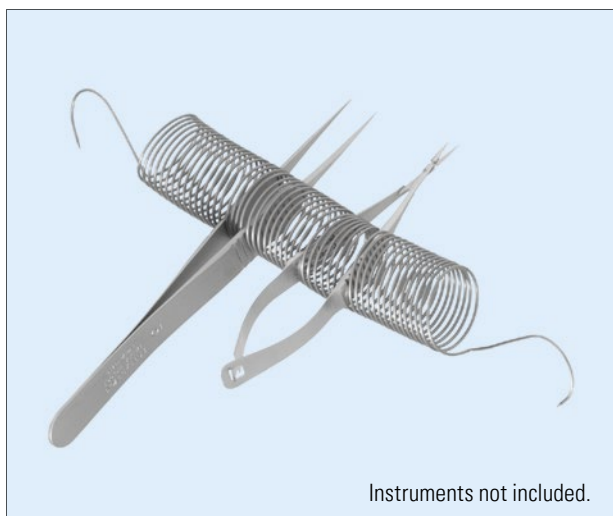

Instrument Holding Spring

For the safe placement of delicate surgical instruments during use. Pin the sharp ends into the drape to secure the mounting spring.

Diameter: 2 cm

Length: 4 cm (closed)

No. 18090-00

Stainless Steel Burrs

Shaft diameter: 2.3 mm
Length: 44 mm
Pkg. of 10 burrs



Diameter (mm)	Item
0.7*	No. 19008-07
0.9**	No. 19008-09
1.4	No. 19008-14

* Use this size for screws No. 19010-10.

** Use this size for screws No. 19010-00.

Carbon Steel Burrs

Shaft diameter: 2.3 mm
Length: 44 mm
Pkg. of 10 burrs



Diameter (mm)	Item
0.5	No. 19007-05
0.7*	No. 19007-07
0.9**	No. 19007-09
1.4	No. 19007-14
2.1	No. 19007-21
2.9	No. 19007-29

* Use this size for screws No. 19010-10.

** Use this size for screws No. 19010-00.

**MOST
POPULAR**

Tungsten Carbide Burrs

Shaft diameter: 2.3 mm
Length: 44 mm
Pkg. of 5 burrs



**TUNGSTEN
CARBIDE**

For more information see page 183.

Diameter (mm)	Item
0.5	No. 19009-05
0.7*	No. 19009-07
0.9**	No. 19009-09

* Use this size for screws No. 19010-10.

** Use this size for screws No. 19010-00.

Stainless Steel Trephines

Side opening for clearing of material.

Shaft diameter: 2.3 mm
Length: 44 mm
Sold individually



1.8 - 2.7 mm

5 mm

Diameter (mm)	Item
1.8	No. 18004-18
2.3	No. 18004-23
2.7	No. 18004-27
5	No. 18004-50

DRILL BITS

Stainless Steel Circular Saw

For cutting bone and other hard substances.
Attaches to mandrel (No. 18000-18), right.

Diameter: 16 mm
Thickness: 0.1 mm

Pkg. of 10 saws
No. 18000-20

**Stainless Steel Mandrel**

Screw allows attachment of discs and circular saws for use with high speed drills.

Shaft diameter: 2.3 mm
Length: 45 mm

No. 18000-18



Low Cost Cautery Kit

This low cost, high temperature cauterizer is a great alternative to disposable cautery units. Temperature at tips is approximately 1000°C (1832°F). Replacement cautery tips are available.
Not autoclavable.



Plastic body
Stainless steel tips: 0.2 mm diameter
Total weight: 60 g
Length: 17.5 cm (without tip)

Cautery kit includes:

- 1 Cautery handle
- 2 AA Batteries
- 2 Standard tips
- 1 Storage case
- 2 Fine tips

Cautery kit
No. 18010-00

**MOST
POPULAR**

65% of actual size



Replacement tips
Straight standard

Box of 10 tips
No. 18010-01

**MOST
POPULAR**



Replacement tips
Straight fine

Box of 10 tips
No. 18010-02

**MOST
POPULAR**

Small Vessel Cauterizer

This small hand-held unit keeps bleeding to a minimum and therefore provides a surgical field clear of clamps and hemostats. The cauterizer should be activated momentarily so the delicate tips do not burn out. Temperature at tips is approximately 1000°C (1832 °F). Replacement cautery tips are available. **Autoclavable.**



Heavy gauge stainless steel body
Platinum-iridium tips: 0.3 mm diameter
Total weight: 100 g
Length: 13.5 cm (without tip)

Cautery kit includes:

- 1 Cautery handle
- 2 AA Batteries
- 1 Straight fine tip
- 1 Storage Case
- 1 Angled fine tip

Cautery kit
No. 18000-00

Cautionary note:
Remove batteries before autoclaving.

65% of actual size



Replacement tip
Straight fine

No. 18000-01



Replacement tip
Angled fine

No. 18000-02



Replacement tip
Straight knife

No. 18000-03




Replacement tip
Straight knob

No. 18000-04

Neuro Punches

N.I.H. style neuro punches for punch removal of frozen brain microregions.

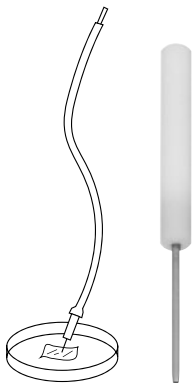


ID (mm)	OD (mm)	Gauge	Length (cm)	Item
0.31	0.61	24	4.2	No. 18036-24
0.41	0.70	22	4.5	No. 18036-22
0.69	1.00	19	4.5	No. 18036-19

Sample Corers

For quantitative analysis. Comes with plunger.

8.5 cm

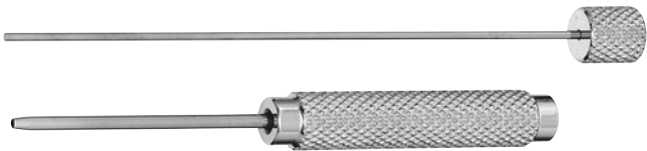

ID (mm)	OD (mm)	Gauge	Item
0.35	0.80	21	No. 18035-35
0.50	1.00	19	No. 18035-50
0.80	1.45	17	No. 18035-80
1.00	1.80	15	No. 18035-01
2.00	3.00	11	No. 18035-02
3.00	4.00	8	No. 18035-03
5.00	6.00	4	No. 18035-05

Absorption Spears and Triangles

These synthetic surgical sponges absorb fluids twice as fast as the best cotton sponges and have three times their fluid-holding capacity. They are made from strong, soft, lint-free biocompatible-proven material that is non-irritating to delicate tissue and leaves no fibrous residue that might cause wound contamination. The Absorption Spears are sterilized by radiation.

MOST POPULAR



Absorption Spears
Sterile
7 cm


Box of 200 spears
No. 18105-01



Absorption Triangles
Sterile
2 cm

Box of 500 triangles
No. 18105-03

Fiber Optic Swabs

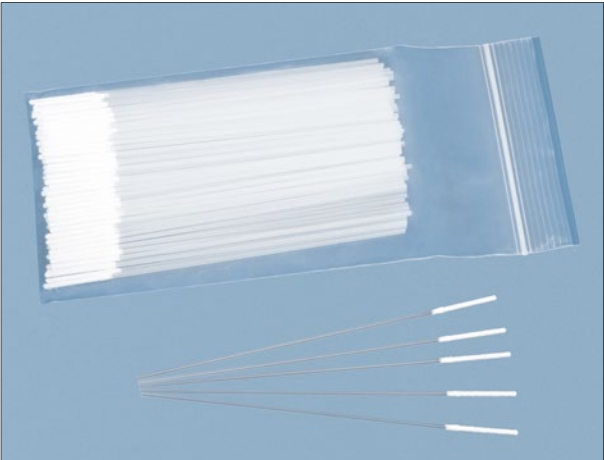

Straight


Pack of 100
Tip diameter: 2.5 mm
15 cm

No. 18106-01

NEW ITEM

Miniature File Set

Comes with 8 different file profiles in a vinyl pouch.
Not autoclavable.

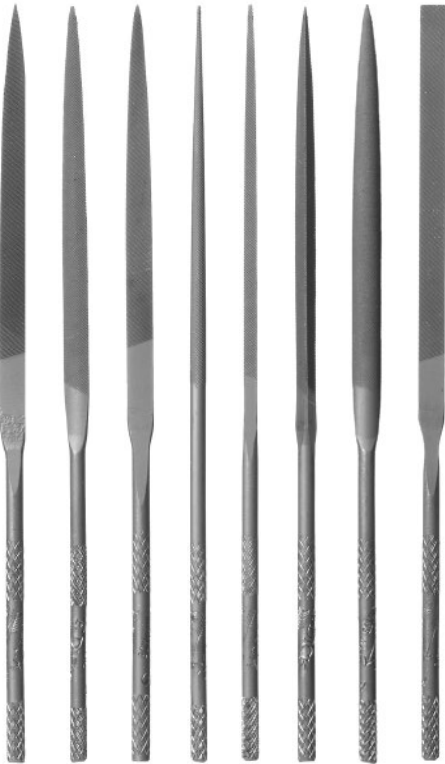

10 cm

No. 30076-14

4-in-1 Screwdriver

With 4 hardened, interchangeable blades stored in handle: 1.5, 2, 2.5, and 3 mm.



10.5 cm

No. 30051-10

Ceramic Blade Cutter




No. 10025-70

**NEW
ITEM**

Utility Scissors

These scissors are extremely hard (54 on the Rockwell scale). Useful for cutting tin or aluminum sheets, bone, plastics, etc. The strong, 3 mm thick blades are magnetic. The plastic handles are anatomically shaped. **Not autoclavable.**

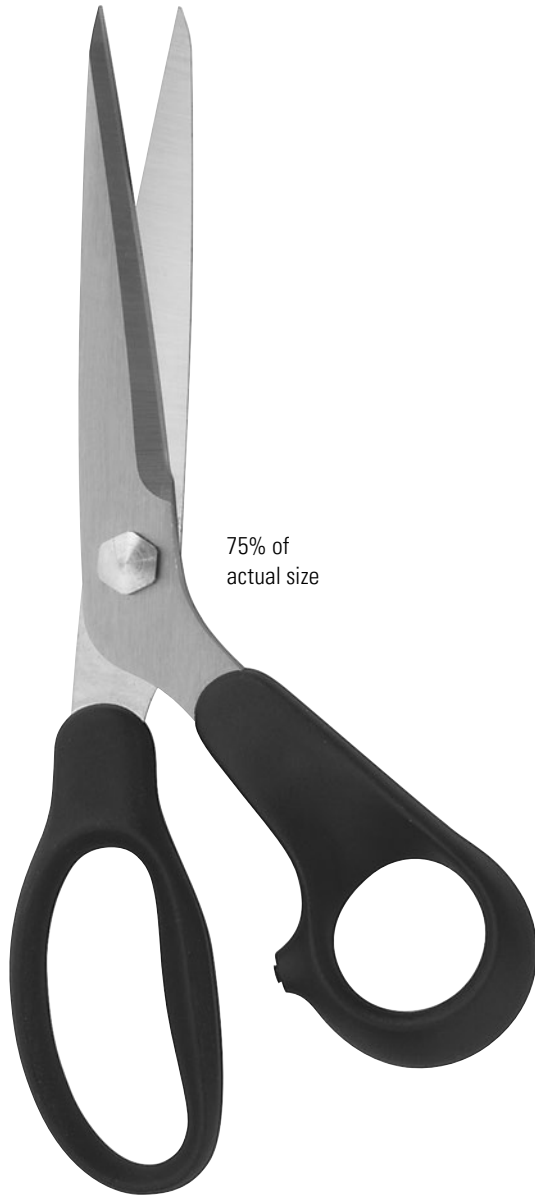

75% of
actual size

Stainless steel with plastic handle
21 cm

Right-handed
No. 37500-00



No. 37000-00

Universal Scissors

The scissor blades are made of high quality stainless-steel and guarantee a perfect cut. Handles are made of glass fiber reinforced polyamide. **Not autoclavable.**



Stainless steel with plastic handle
13 cm


Right-handed
No. 37500-05

**NEW
ITEM**


Ruler with Gauge Measurements

Stainless steel
15 cm (6")
No. 30085-15

90% of actual size



Front



Back

Ruler with Metric Conversion Table

Stainless steel
30 cm (12")
No. 30085-30

50% of actual size



Front



Back

Ruler Label

Used for stable measurements in
all surgical platforms.

6 cm
Pkg. of 25 labels
No. 29027-00



Plastic Vernier Caliper

Tough polymer is unbreakable under normal conditions. Measures inside, outside, step and depth, metric and inch to 0.1 mm or 1/64". Capacity is 13 cm.



75% of actual size

21 cm

No. 30087-20

Digital Electronic Caliper

Wide screen LED display with the ability to measure in millimeters, inches and fractions. Measures inside, outside, step and depth. Battery, spare battery and plastic storage case included.



70% of actual size

Stainless steel
23.5 cm

No. 30087-00

Castroviejo Surgical Caliper

Used for precise measurement during surgery.



0-20 mm with 0.5 mm divisions
Tip diameter: 0.5 mm
8.5 cm

No. 18000-35

Magnifying Loupe with Micrometer and LED

High quality loupe features a removable micrometer and ultra-bright LED lights surrounding the circumference for a defined image and clear contrast.

Magnification: 10x
Field of view: 30 mm
Working distance: 10 mm (without scale)
Illumination: Ultra-bright LED
38 x 38 x 40 mm

No. 29026-10




Stage Micrometers

These are highly accurate stage micrometers for use with transmitted light in both compound and stereo microscopes. Comes with a plastic case.

76 x 26 mm

10 mm with 100 divisions (0.1 mm)
No. 29025-01

1 mm with 100 divisions (0.01 mm)
No. 29025-02

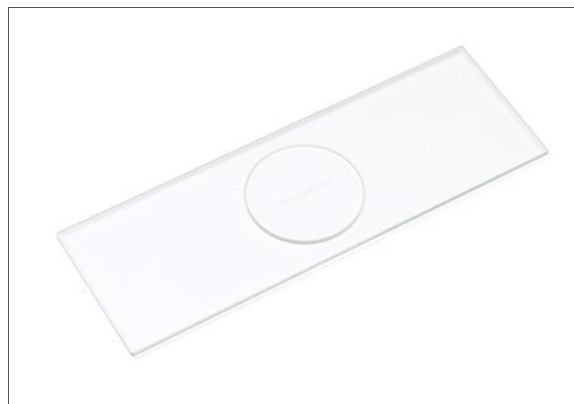

Electronic Clock / Triple Timer

Three activities can be timed up or down simultaneously or individually. Time can be displayed either in 12 or 24 hours and features a memory function. Maximum countdown time is 19 hours, 59 minutes, 59 seconds. Minimum time interval is 1 second. The timer housing includes a powerful magnet for mounting.

LCD display: 4.5 x 4.5 cm

7 x 8.5 x 1.5 cm

AAA battery included

No. 27000-01



Gold Wire Contacts

Matching pin and socket. Contacts are crimp terminated, but also can be used for solder connections.

Total length: 16 mm (when connected together)

Diameter: 1.2 mm

Opening for wire: 0.63 mm

Pkg. of 50 male contacts

No. 19003-00

Pkg. of 50 female contacts

No. 19003-01



Enlarged

Headband Magnifier

Precision ground and polished optical glass lenses. The padded headband is lightweight and fully adjustable. Can be worn with spectacles.



Headband magnifier shown with VisorLIGHT™ (sold separately).

Magnification: 2.5x
Working distance: 200 mm (8")

No. 28030-02

Magnification: 2.75x
Working distance: 150 mm (6")

No. 28030-03

Magnification: 3.5x
Working distance: 100 mm (4")

No. 28030-04

VisorLIGHT™

Small, portable light source with 3.9 cm cord for attachment to headband. It comes with a battery pack that holds two AA batteries. Completely adjustable. Replacement bulbs are available upon request.



No. 28030-10

Interchangeable Magnifier Headset with LED

Economical and fully interchangeable headband magnifier with LED light.

Includes:

- Multiple Lens Magnifications (1.0x, 1.5x, 2.0x, 2.5x, 3.5x)
- LED Light Source
- Tilting Functionality
- Cushioned Nose Pads
- Adjustable Headband
- Interchangeable Lens Frames
- Requires 3 AAA Batteries (Batteries not included)

Magnification: 1x, 1.5x, 2x, 2.5x, and 3.5x

Field of view: Variable

Working distance: Variable

No. 28080-10

**MOST
POPULAR**



Can be used with or without the adjustable head strap (included).

FINESCENCE.COM · MOST ITEMS SHOWN ACTUAL SIZE

RESEARCH ONLY

PRODUCTS ARE FOR RESEARCH AND VETERINARY PURPOSES ONLY.

Galilean Loupes

These loupes are lightweight and easy to use. Made from the finest optical coated lenses which deliver excellent clarity and high resolution. The loupes are mounted onto a strong yet flexible wraparound safety frame with a headband for stability and comfort. Ability to flip loupes up for use as safety glasses. Comes with mini screwdriver for fine adjustments, micro cloth, and storage case.

Magnification: 3x
Working distance: 400 mm (16")
Weight: 72 g

No. 28050-30

Magnification: 3.5x
Working distance: 300 mm (12")
Weight: 77 g

No. 28050-35



Eschenbach Magnifier Spectacles

These magnifier spectacles allow full adjustments on almost all parts. Headband keeps spectacles steady and in place. Leather case and Headband included.

Magnification: 2.5x
Working distance: 350 mm (14")
Weight: 70 g
Plastic frame reinforced with fiberglass

No. 28040-30



Spectacles Headband

Compatible with the Eschenbach Max Detail Spectacles (Item No. 28030-20) and Eschenbach Magnifier Spectacles (Item No. 28040-30).

Material: Neoprene

No. 28080-90



Eschenbach Max Detail Spectacles

These spectacles are portable, lightweight, and easily adjustable. Designed with frosted objective lens housing which eliminates distracting reflections. Bendable ear pieces for a secure, comfortable fit. Protective case is included.

Magnification: 2x

Field of view: 110 mm (4")

Working distance: 400 mm (16")

Weight: 49 g

No. 28030-20

**MOST
POPULAR**



Max Detail Spectacles shown with Eschenbach Clip-On LED Light (sold separately).

Eschenbach Clip-On LED Light

A compact and lightweight light source with two high-performance SMD LED's and a lens that concentrates the light producing a more powerful, bright and homogenous field of view. Light can be set high or low. Compatible with the Max Detail Spectacles and Headband Magnifiers. Comes with 3 AA batteries and storage case.

Gross Weight: 106 g (including batteries)

No. 28030-25

**MOST
POPULAR**





Optical Cleaning Kit

This convenient kit contains everything you need to clean lens surfaces safely. Perfect for microscopes, camera lenses, binoculars, telescopes, graphic art optics, and all other fragile lenses. Storage case included.

Kit includes:

- 1 Bottle of lens cleaner (30 ml)
- 1 Ultra soft duster brush
- 1 Cleaning cloth (20 x 20 cm)
- 3 Books of lens paper (25 sheets each)

No. 29000-10



Lens Paper

This premium grade optical lens tissue is extremely soft and safe for any glass or plastic optical lens surface.

15 x 10 cm

Book of 50 sheets

No. 29015-50

Eschenbach Vario Flex with LED

The Vario LED Flex ensures ease and precision by its smooth flexible neck and tiltable magnifying lens. This magnifier's innovative features provide a spacious working platform suitable for any application. Mounting clamp provides uncompromised workspace due to its sturdy, slim design. The magnification lens is illuminated with shadow-free full or half ring optimum bright LEDs.

Magnification: 2.5x

Diopter: 6D

Lens size: 76 mm

Lens shape: Aspheric

Working distance: Variable

Lens material: PXM® lightweight lens with patented

Ceratec® scratch-resistant coating

Illumination: Latest SMD LED technology

Power source: 120V & 220V

No. 28015-25



Eschenbach Scribolux Magnifier

This magnifier provides an illuminated platform suitable for any working condition. The open design allows for a spacious working platform. Supplied in a microfiber pouch for protecting and cleaning the lens.

Magnification: 2.8x

Diopter: 7/11D

Lens size: 100 x 75 mm

Lens shape: Aspheric

Working distance: 75 mm (3")

Lens material: PXM® lightweight lens with patented


Ceratec® scratch-resistant coating

Illumination: Latest SMD LED technology

Power source: 4 AA batteries (included)

No. 28020-28



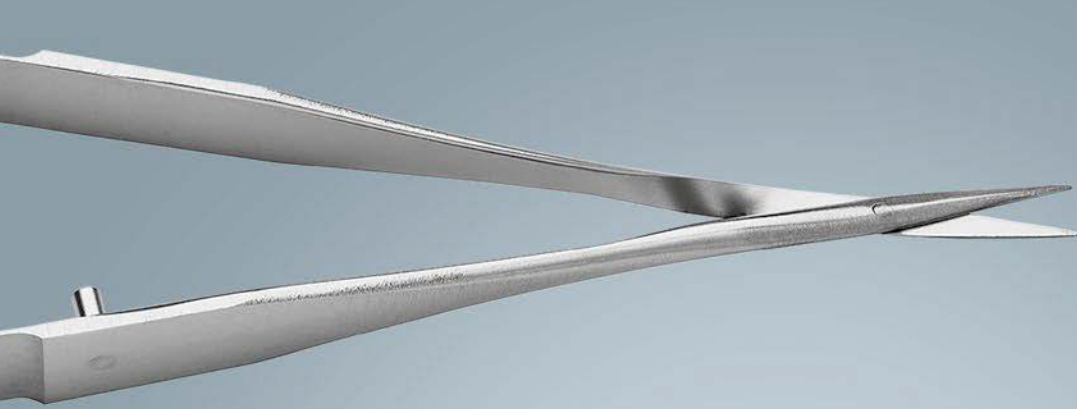

Student Quality Instruments

Scissors	Pages	173 – 174
Cutter	Page	174
Vessel Dilator	Page	175
Forceps	Pages	175 – 177
Hemostat, Needle Holder, Pin Holder, Scalpel Handle & Retractor	Pages	178 – 179




Vannas Spring Scissors

Ideal for introductory courses in microdissection. The manufacturer, material and general pattern are the same as our No. 15003-08 but with much of the costly hand finishing omitted.



Cutting edge: 5 mm
Tip diameter: 0.35 mm
9 cm



Straight

No. 91500-09



Curved

No. 91501-09

MOST POPULAR

Fine Scissors



11.5 cm



Straight

No. 91460-11



Curved

No. 91461-11

MOST POPULAR


Quantity discount for student instruments:

5-9 = 5%
10+ = 10%

Per item, selection cannot be assorted for discount.

For more info on student instruments see page 187.

Surgical Scissors

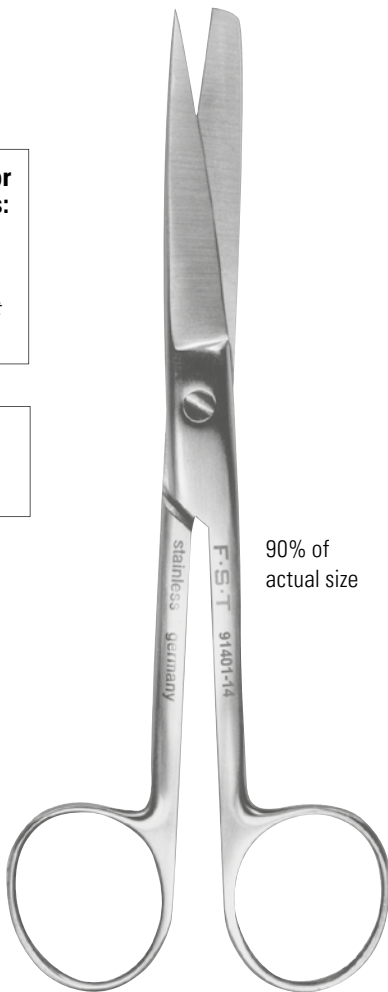

90% of actual size



Sharp/Sharp

10.5 cm
No. 91402-10

12 cm
No. 91402-12

14.5 cm
No. 91402-14



Sharp/Blunt

10.5 cm
No. 91401-10

12 cm
No. 91401-12

14.5 cm
No. 91401-14



Blunt/Blunt

10.5 cm
No. 91400-10

12 cm
No. 91400-12

14.5 cm
No. 91400-14

STUDENT

Lister Scissors

Longer blunt blade prevents damaging tissue underneath skin without losing the cutting line.



Angled to side
Blunt/Blunt
14 cm

No. 91413-14

Bone Scissors

For cutting fine bone.



Curved

Cutting edge: 9 mm
9 cm

No. 91604-09



**Quantity discount for
student instruments:**

5-9 = 5%

10+ = 10%

*Per item, selection cannot
be assorted for discount.*

For more info on
student instruments
see page 187.

Bone Cutter

Angled 30°

Cutting edge: 19.5 mm
Blue Plastic Handle
11 cm

No. 91601-11

**NEW
ITEM**



Vessel Dilator



Angled 10°

Tip diameter: 0.3 mm
11 cm

No. 91815-11

Standard Pattern

Broad pattern with strong spring action.




Serrated

Tip width: 2.5 mm
11.5 cm
No. 91100-12

MOST POPULAR

Tip width: 3.5 mm
16 cm
No. 91100-16



1x2 teeth

Tip width: 2.5 mm
12 cm
No. 91121-12

Quantity discount for student instruments:

5-9 = 5%
10+ = 10%

Per item, selection cannot be assorted for discount.


Adson

Wide, strong grip with narrow tips.



Serrated

No. 91106-12



1x2 teeth

No. 91127-12

Tip width: 1.5 mm
12 cm

Dumont #5

**MOST
POPULAR**

Standard tip
0.1 x 0.06 mm
Inox
11 cm

No. 91150-20

Dumont #7

**MOST
POPULAR**

Standard tip
0.17 x 0.1 mm
Inox
11 cm

No. 91197-00

**Quantity discount for
student instruments:**

5-9 = 5%

10+ = 10%

*Per item, selection cannot
be assorted for discount.*

For more info on
student instruments
see page 187.

Fine Forceps
Straight



0.2 x 0.1 mm
11 cm

No. 91115-10

Fine Forceps
Broad Shanks



0.2 x 0.2 mm
12 cm

No. 91113-10

Fine Forceps
Curved



0.2 x 0.2 mm
12 cm

No. 91117-10

Fine Forceps
Angled



0.2 x 0.2 mm
11 cm

No. 91110-10

Quantity discount for
student instruments:

5-9 = 5%

10+ = 10%

*Per item, selection cannot
be assorted for discount.*

Halsted-Mosquito Hemostat

Halsey Needle Holder

Quantity discount for student instruments:

5-9 = 5%

10+ = 10%

Per item, selection cannot be assorted for discount.

For more info on student instruments see page 187.

Straight
12.5 cm

No. 91308-12

Curved
12.5 cm

No. 91309-12



13 cm

No. 91201-13

**MOST
POPULAR**For suture needles,
see page 116 & 117.

Pin Holder



Nickel-plated
Jaw opening: 0-1 mm
7.5 cm

No. 91606-07

For pins, see
page 109.

Standard Scalpel
Handle #3




12 cm

No. 91003-12

For scalpel blades,
see page 58.

**Quantity discount for
student instruments:**
5-9 = 5%
10+ = 10%
*Per item, selection cannot
be assorted for discount.*


Spring-Loaded Retractor

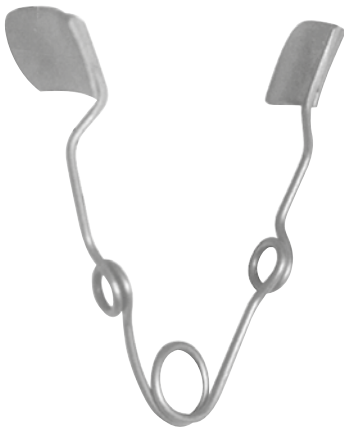

Curved atraumatic blades
Maximum spread: 3 cm
Blade dimensions: 14 x 10 mm
8.5 cm

No. 91706-05

STUDENT

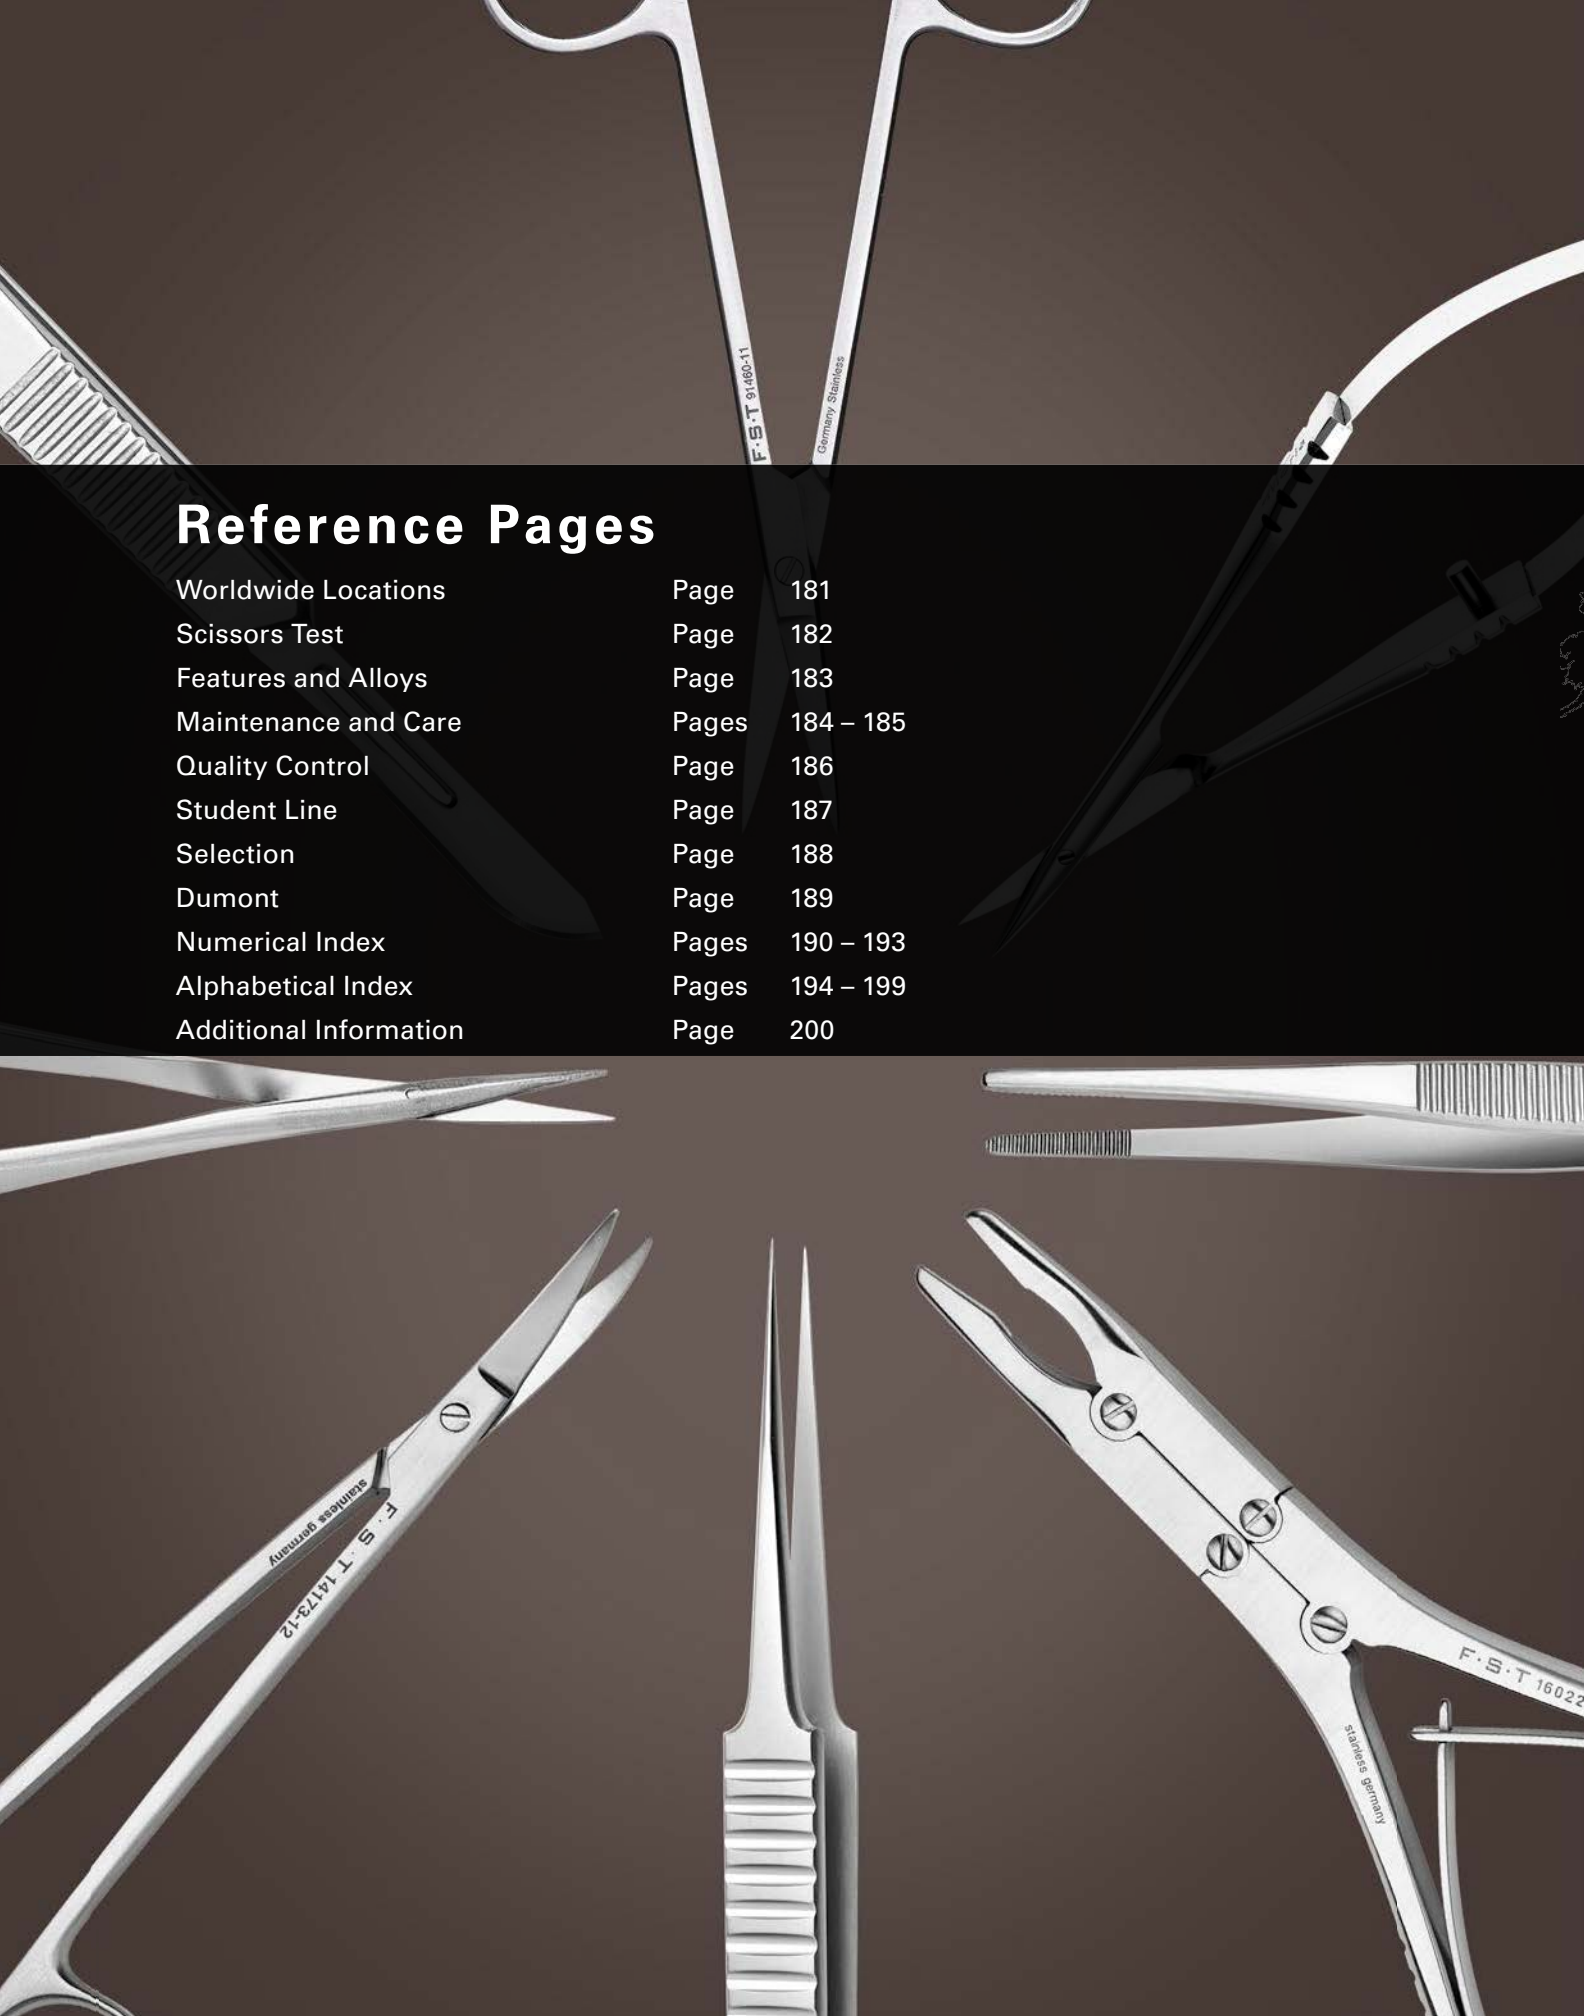


Reference Pages

Worldwide Locations	Page	181
Scissors Test	Page	182
Features and Alloys	Page	183
Maintenance and Care	Pages	184 – 185
Quality Control	Page	186
Student Line	Page	187
Selection	Page	188
Dumont	Page	189
Numerical Index	Pages	190 – 193
Alphabetical Index	Pages	194 – 199
Additional Information	Page	200

Fine Science Tools Around the World

Commitment to excellence

For decades, we've demonstrated our commitment to excellence with genuine quality and a 100% satisfaction guarantee. As a result, our products continue to be the preferred instruments among scientists and biomedical researchers worldwide.

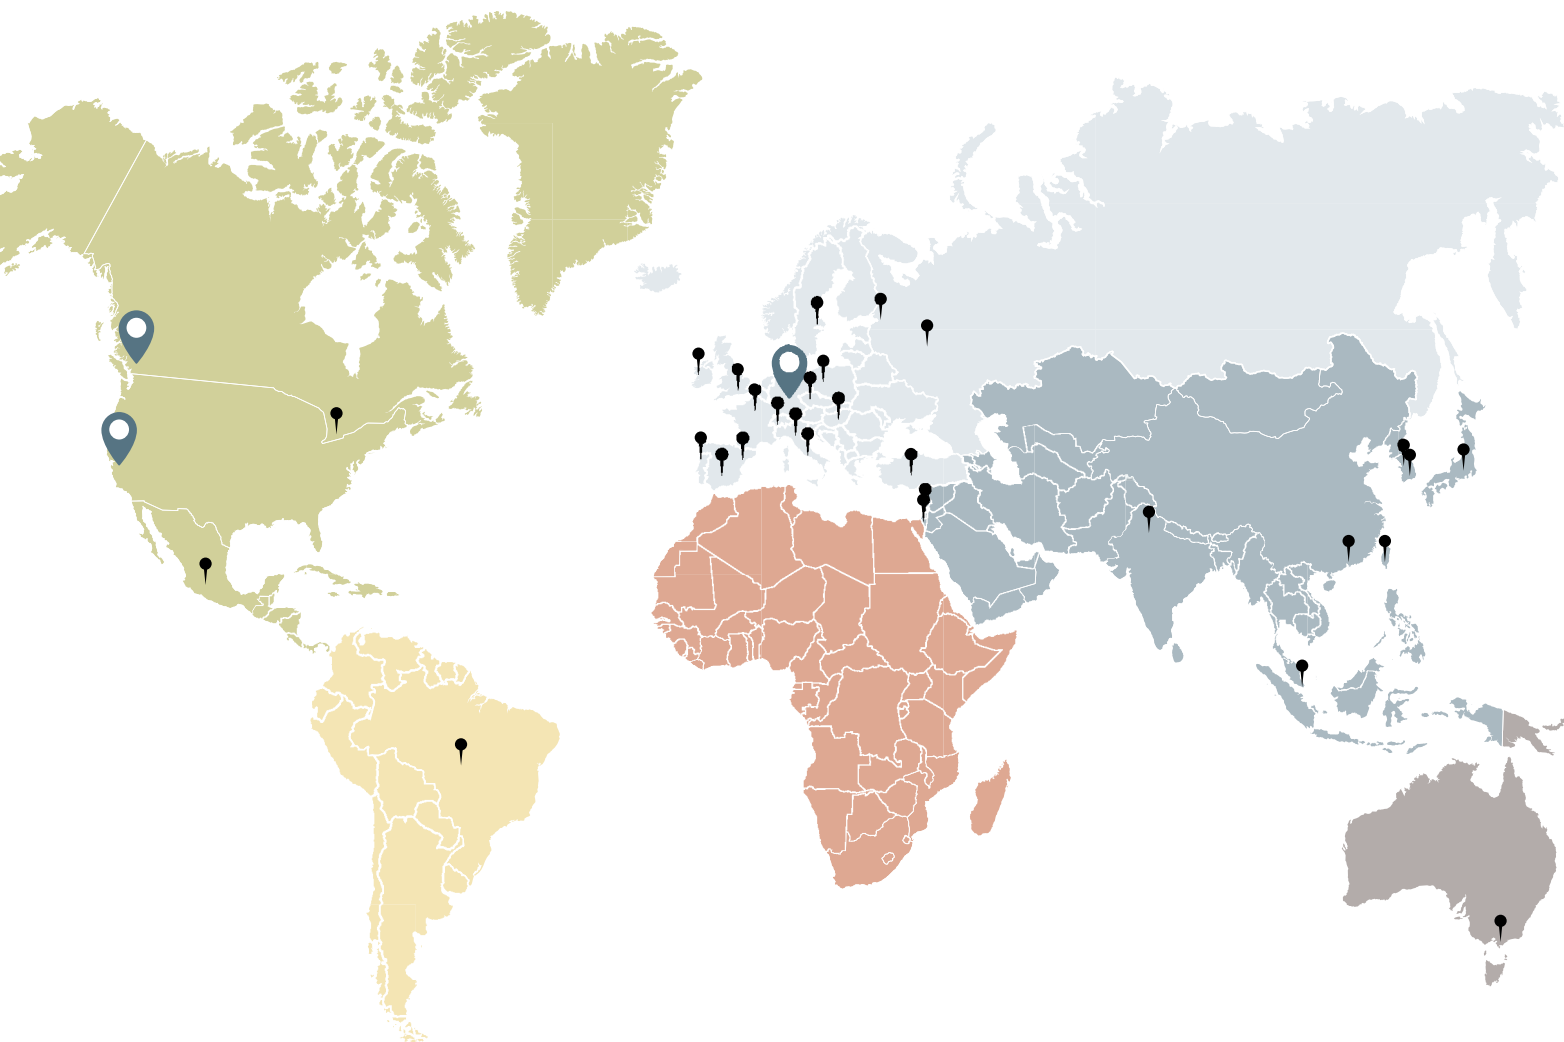

We have offices and dealers throughout the world
and have been shipping globally since 1974.



Offices

finescience.com
finescience.de
finescience.ca

USA
Europe
Canada/International



Dealers

To see a complete list of Fine Science Tools
dealers, please visit us at
finescience.com/en-US/Contact/FST-Dealers.

Does paying more for a pair of scissors really buy more value and a longer cutting life?

Pictured below is a scissors testing device used to compare various alloys and cutting edge styles. The scissors repeatedly cut through a continuous feed of cotton cloth, and a counter keeps track of the number of cuts made to evaluate when the scissors begin to show a decrease in cutting quality.

The results verify that the addition of various features dramatically increases the cutting life of the scissors. Most notably, the cutting life is more than doubled with the addition of ToughCut blades to stainless steel, and over six times longer with CeramaCut blades.

See the chart below for a comparison of four different scissors sold by FST.




The cutting life is more than doubled with the addition of ToughCut blades to stainless steel, and over six times longer with CeramaCut blades.

Alloy/Material	Lasts longer than stainless steel by:
Tungsten Carbide	1.9x
Stainless Steel with ToughCut	2.3x
Tungsten Carbide with ToughCut	4.1x
CeramaCut (Ceramic Coated Tungsten Carbide with ToughCut)	6.6x

See page 183 for more information on ToughCut, Tungsten Carbide and CeramaCut.

Tungsten Carbide



When you place heavy demands on your surgical instruments, be it scissors, needle holders, or forceps, you should consider the benefits of tungsten carbide, one of the hardest alloys available. Tungsten carbide scissors last almost two times longer than stainless steel, and needle holder tips can be made with a pyramid cross pattern that holds suture needles much more securely. Inlays are either glued or welded into place.

Compare the extra cost of these instruments with the length of useful wear and you have a cost effective solution for your instrument requirements. Tungsten carbide instruments are identified by their gold handles.

Bone Cutters: page 41

Scissors: pages 10, 20–21, 23, 30–32, 34 and 44

Forceps: page 84

Needles: page 109

Needle Holders: pages 111–115

Burrs: page 157

Look for this symbol



ToughCut® Scissors



ToughCut scissors feature two unique cutting edges that cut through the toughest tissue with exceptional ease and accuracy. One blade is honed to razor sharpness, and the other is micro-serrated to minimize tissue slippage during cutting. Scissors with ToughCut edges are identified by their black handles.

For ToughCut scissors that last almost two times longer, select ToughCut with tungsten carbide cutting edges.

Scissors: pages 6, 15, 20–21, 30, 33–34

Look for this symbol



Ceramic and CeramaCut® Instruments



One of the hardest materials on Earth, ceramic is used in surgical instruments to form edges that last longer than stainless steel and even longer than tungsten carbide. Ceramic also has a high slide capacity which reduces surface tension and results in a much cleaner cut than metal instruments. Our CeramaCut scissors combine ToughCut technology with tungsten carbide edges and a ceramic coating for one of the best, cleanest cutting scissors available on the market today.

CeramaCut Scissors: page 21

Ceramic Blades: page 52

Ceramic Cutter: page 160

Ceramic Coated Forceps: pages 63 and 69

Ceramic Coated Spring Scissors: pages 7 and 11

Look for this symbol



Titanium

Titanium instruments are over 40% lighter than equivalent stainless steel instruments, with better flexibility and strength. Elemental titanium (Ti) is a very strong, lustrous, white metal with a specific gravity of 4.54. Titanium and titanium alloys readily form stable protective surface layers, giving them excellent corrosion resistance to saltwater, laboratory saline solutions, blood and other bodily fluids, oxidizing acids, alkalis and chlorides. Titanium is 100% nonmagnetic; a great benefit when working with nerves. Its inherent surface oxide film provides bactericidal and non-allergenic properties. Titanium alloys can be heated up to 440°C (824°F).

Scissors: pages 6 and 11

Forceps: pages 65, 69, 80, 86 and 90

Probes, Y-Hook and Spatula: page 102

Vascular Clamps: pages 132–133

Look for this symbol



Cleaning, Sterilization, Maintenance, & Storage of Surgical Instruments

Proper care of your surgical instruments will improve their longevity and function. Below are different cleaning, sterilization, and maintenance processes to guide you through your techniques.

General Care & Maintenance

Guidelines to extend the life of your surgical instruments.

- Clean and thoroughly dry your instruments as soon as possible after each use, paying special attention to joints, hinges, and anywhere there is metal to metal contact.
- Handle your instruments delicately and with care.
- Use your instruments for their intended purpose.
- Store your instruments with tip protectors, and always place them so that they do not touch each other.

Cleaning

Fine surgical instruments should be cleaned immediately after use. Blood or saline solutions left on instruments for any length of time can quickly start corrosive action. Time, temperature, and agitation play important roles in the cleaning process. Time affects the efficiency of cleaning solutions as most are effective after a certain time period. Higher temperature cleaning solutions result in better cleaning. During manual or ultrasonic cleaning it is helpful to loosen any surgical residue. Before any of the below procedures, rinse your instruments under warm running water to remove all blood and tissue. Instruments can be cleaned manually or ultrasonically, but always:

- Use a neutral pH (pH 7) cleaning solution.
 - Clean instruments in the open position to ensure a thorough and effective cleaning process.
 - Use soft textile or paper cloths, soft plastic brushes made of nylon, or water spray guns.
- Do **NOT** use steel wool, wire brushes, or scouring pads as these are abrasive to the instruments.

Manual Cleaning

- Make sure all instruments are visibly clean and free from stains, wiping them carefully to remove all blood and tissue matter.
- Rinse instruments thoroughly with distilled water, paying close attention to joints and hinges as these areas can accumulate unwanted material.
- Air dry your instruments completely and use a can of compressed air to blow out any water at the joints and hinges. Then store them only in clean and dry environments.

Ultrasonic Cleaning

Ultrasonic cleaning is the most effective cleaning method. The vibrating sound waves create micron-sized bubbles in the solution that grow with the alternating pressure. When the bubbles reach a particular size, they collapse creating a force that dislodges dirt and particles, even in the smallest of crevices.

- **NOT** recommended for delicate and micro instruments.
- Follow the manufacturer's guidelines for specific instructions and cleaning cycle times. Instruments should be processed for the full recommended cycle time.
- Place instruments in the open position in the ultrasonic cleaner.
 - Do **NOT** allow instruments with sharp blades to touch other instruments.
 - Do **NOT** place dissimilar metals (stainless, copper, chrome plated) in the same cleaning cycle.
 - Make sure all instruments are completely submerged.
- After the ultrasonic cleaning cycle is complete, rinse instruments thoroughly to remove all ultrasonic cleaning solution.
- Dry instruments thoroughly with a clean towel.
- Use a spray lubricant in the hinges to minimize the risk of corrosion and maintain functionality.

Sterilization

It is important that instruments are free from all traces of organic or other matter prior to sterilization.

Steam Sterilization/Autoclaving

The autoclave process utilizes moist heat (or steam) under pressure for sterilization. The steam used must be from distilled water and free of all impurities.

- Lubricate all instruments that have any metal to metal interaction such as; scissors, rongeurs, needle holders, hemostats, and retractors. Do **NOT** use WD-40 or other industrial lubricants.
- Instruments may be autoclaved individually or in sets.
 - **Individual instruments:** Disposable wraps or sterilization pouches are ideal. Make sure the pouch size is sufficient for the instrument to be in an open (unlocked) position.
 - **Instrument sets:** Open and unlock all instruments. Place the heavier instruments on the bottom of the set when two layers are needed.
- Do **NOT** lock instruments during autoclaving. This will prevent the steam from reaching and sterilizing the metal to metal surfaces, and heat expansion during autoclaving can cause cracks in the hinge areas.
- Do **NOT** over load the autoclave chamber as this may hinder steam penetration.
- Place a towel on the bottom of the pan to absorb excess moisture during autoclaving. Make sure the towel has no detergent residue and is pH neutral if immersed in water.
- At the end of the autoclave cycle (before the drying cycle) unlock the autoclave door and open it slightly. Run the dry cycle for the recommended time period by the autoclave manufacturer.

IMPORTANT NOTE: Do **NOT** mix instruments of different or unknown alloys in the autoclave.

Please note: If the autoclave door is fully opened before the drying cycle, cold air will rush into the chamber, which can cause condensation on the instruments. This will result in water stains on the instruments.

Hot Bead Sterilization

Recommended for speed and convenience when instrument tips or blade sterilization is required. The Hot Bead Sterilizer does not use dangerous gases, flames, or chemicals. Highlights:

- Bench top set up.
- Only 20 seconds of contact required to ensure your instruments are free of pathogens and microbial contaminants.
- Can be left on all day.
- Beads reach temperature of 240° - 270°C (464° - 518°F) within 15-20 minutes heating time.

Please see page 149 for more information on the FST Hot Bead Sterilizers.

Ethylene Oxide (ETO) Sterilization

This method is recommended for instruments that will not tolerate high temperatures or moisture (e.g., catheters, cannulae, etc.). This is a process consisting of 4 primary variables; gas concentration, humidity, temperature and time. Sterilization pouches and wraps available, see pages 148 and 152.

Storage

Surgical instruments should be properly stored in a clean and dry environment. It is highly recommended to use tip protectors and instrument cases to avoid possible damage to your instruments. Instrument tip protectors are available, see page 147. Instrument cases are available, see pages 152 – 155.

Oxidation (Rust)

All FST stainless steel surgical instruments are manufactured from medical grade stainless steel under strict European standards. It is very important to properly take care of your instruments to extend their lifespan.



Although stainless steel is corrosive resistant, it can still rust or stain if handled improperly. Under unfavorable conditions instruments may oxidize because stainless steel that is exposed to physical, thermal, or chemical manipulations may lose some of its stainless properties.

Quality Control

The high quality of Fine Science Tools surgical and microsurgical instruments is the result of our relentless attention to detail. Almost every instrument we sell is manufactured by skilled European craftsmen, designed to exacting specifications made from the finest German stainless steel alloys, and forged from the strongest, lightest materials available, and tested to ensure precision performance and ergonomics.

We are dedicated to quality control, with technicians in our German office inspecting most FST instruments. Aside from checking instrument dimensions and specifications, we thoroughly inspect tip sharpness, cutting edges, springs, joints, and other various components. Only after passing our detailed inspections, instruments are approved and sealed with our "FST Inspected" sticker.

We are proud to guarantee all of our products with your 100% satisfaction. If, for any reason, you are not completely satisfied with your purchase, you may return it for a full refund.

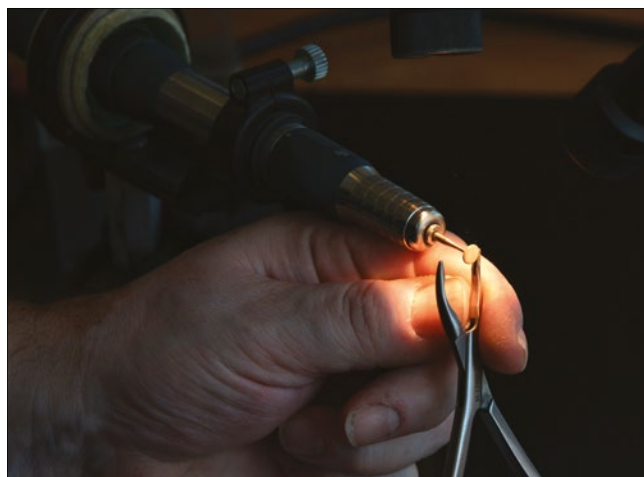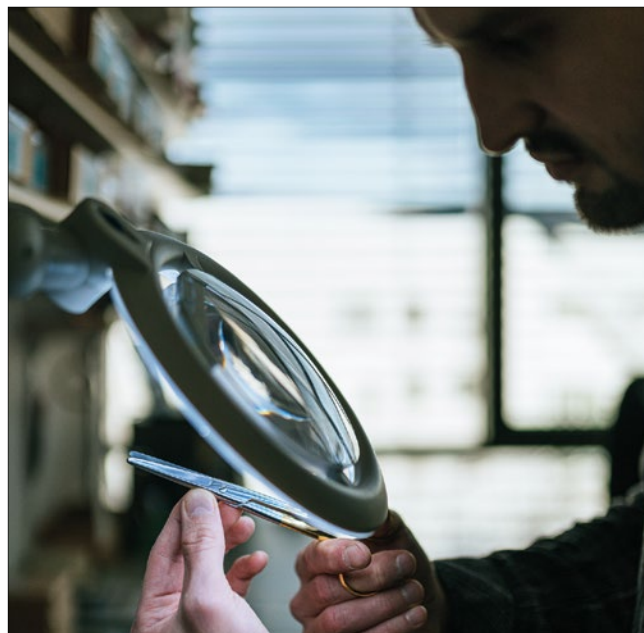



FST Student Quality Instruments

One of the hallmarks of FST has always been to accurately assess the needs of our customers. We gather information not only from the lab, but from conferences, journals and researchers. Whether it is designing new tools or finding new applications for existing instruments, we believe our best information comes directly from you.

Our customers wanted reduced costs and quantity discounts without sacrificing the precision and quality inherent in German instruments. To meet their needs, we have developed a full line of "student" instruments. They were created for use in the classroom where students are learning proper instrument care.

Unlike our competitors, the quality of these instruments does not drop dramatically with the price. Our student line uses quality stainless steel and maintains the precision you expect from FST. In addition they carry our unconditional satisfaction guarantee while being offered at a significantly reduced price.

Not intended as a substitute for our highest quality instruments, the student line may require extra care as the alloys used are more susceptible to corrosion. All of our shipments come with an instruction pamphlet describing the use and care of surgical instruments. Visit our website at finescience.com for more information.

Features:

- Economy
- Quantity discounts
- Quality
- Less hand finishing
- Less expensive alloys

We Proudly Stock



Fine Science Tools is proud to offer a large selection of left-handed surgical instruments to the research community. To find our left-handed instruments in this catalog, look for the “left-handed” icon on the pages below.

Scissors: pages 17, 29 and 161

Hemostatic Forceps: page 93

Needle Holders: pages 113-114

Ligation Aid: page 135



FST features a selection of scissors with larger than normal finger loops. Most of these loops are easily adjustable to fit larger fingers more comfortably. To find our large loop scissors please look for the “large loop” icon on the pages below.

Scissors: pages 19, 28 and 31



Fine Science Tools has noted which items are most frequently purchased for use in a variety of surgical procedures. To find our most popular items, look for the “most popular” icon throughout the catalog.



Fine Science Tools offers a wide selection of the latest and most popular Dumont forceps. Hand crafted in Switzerland for more than a century, these forceps are known for their consistent and uncompromised fineness. Dumont forceps come in a wide array of styles and alloys. On page 189, you will find detailed descriptions to help guide you in choosing the right Dumont forceps best suited for your needs.



Moria of France is one of the most respected and well known ophthalmic instrument manufacturers in the world, offering some of the finest surgical instruments in the industry for almost 200 years.

Only quality Swedish and German stainless alloys are selected; and many hours of highly skilled labor are put into the manufacturing process, which includes hand crafted sharpening, balancing, and polishing, often done under 40x magnification. Moria's product line includes scissors, spring scissors, forceps, spoons, vessel clamps, and more.



This Swiss manufacturer has established itself as one of the premier suppliers of superb microsurgical instruments worldwide. Unique designs, precise instrument balance, and optimum angles gives S&T instruments the “right feel” which is important for all procedures. S&T's product line includes forceps, needle holders, scissors, vessel clamps, sutures, vessel cannulation forceps, vessel dilators, and more.

Finding the Dumont forceps best suited for your needs:



Alloys	Hardness	Magnetic	Temperature resistance	Autoclavable	Advantages
Titanium	Least Hard	No	Up to 430° C	Yes	Resistant to corrosion from nitric acid, chloride, and salt water. Titanium is 40% lighter than stainless steel.
Dumoxel	Hard	No	400° C	Yes	The most popular alloy available for Dumont forceps offers the best resistance to corrosion, sulphuric environments, hydrochloric acids, and all other mineral and organic acids.
Inox	Harder	Yes	400° C	Yes	Available for most Dumont forceps. Contains chromium added to carbon steel, which results in some loss of hardness but offers good stainless qualities and resistance to corrosion.
Dumostar	Harder	No	500° C	Yes	More durable and corrosion resistant than the best stainless steels. Highly resistant to mineral and organic acids, and salt water. Dumostar lasts an average of four times longer than Dumoxel and Inox. Most cost effective alloy for laboratory use.
Carbon	Hardest	Yes	N/A	No	Extremely hard; ensuring strong tips. Easily stains and rusts without proper care. Carbon cannot be immersed in a water bath or sterilized.

Tip profiles: Dimensions vary. See each style for specific dimensions (width x thickness).

Standard	Made for high precision and consistently precise work under a microscope.
Biology	Twice as fine as "Standard Tips." Especially produced for high precision laboratory work under the microscope.
Super Fine Tips	Four times finer than the "Standard Tips." These tips are extremely delicate for the finest work under the microscope. Extra care is needed for these tips as they are very fragile.

Styles

#2	Straight forceps with wide yet fine tips, referred to as Mouse Laminectomy Forceps because of their popularity in breaking off delicate bone from mouse skulls.
#2AP	Epoxy coated with flat wide blunt tips.
#3	Long straight forceps with coarse tips. Popular in low magnification procedures.
#3C	Shorter version of #3.
#4	Similar to the #5 but with broader shanks and stronger tips.
#5	Most popular style of Dumont straight forceps with fine tips which come in several styles.
#55	Similar to the #5 but with lighter shanks, giving the forceps a lighter spring action.
#5CO	Similar to the #55 but with even finer shanks producing the lightest spring action and longest meeting surface of any Dumont style.
#5L	Medical #5 forceps with slide sleeve for a secure hold and retention.
#5SF	The finest tips ever produced by Dumont.
#5XL	Extra Long #5 forceps.
#5/45	Tips angled at 45°.
#5/45C	Designed to pick up cover slips from multi-well plates.
#5/90	Tips angled at 90°.
#6	Sharply angled, broad tips.
#7	Most popular style of Dumont curved forceps with fine tips which come in several styles.
#7B	Curved serrated tips.
AA	Strong broad tips.
M	Mini forceps.
Medical	Denotes distinctive ribbed handle to maximize grip.
SS	Long and narrow shanks with thin tips.
WA	One piece design with no soldering grooves allows the forceps to be thoroughly and easily cleaned preventing biofilm residue.

FINESCENCE.COM · MOST ITEMS SHOWN ACTUAL SIZE

INDEX

Item No.	Page No.					
		10030-13..... 100	10096-16..... 49	11001-12.....87	11023-10..... 88	11092-12.....97
		10031-13..... 100	10097-16..... 49	11001-13.....87	11023-12..... 88	11093-10.....77
		10032-13..... 100	10098-06.....105	11001-14.....87	11023-14..... 88	11095-09..... 96
00071-14.....131		10033-13..... 100	10099-12..... 106	11001-16.....87	11023-15..... 88	11095-13..... 96
00072-14.....131		10035-00..... 56	10099-15..... 106	11001-18.....87	11024-18.....91	11101-09..... 83
00081-00.....156		10035-05..... 56	10100-30.....52	11001-20.....87	11025-18.....91	11103-09..... 83
00108-11.....75		10035-10..... 56	10100-45.....52	11002-12..... 86	11026-15..... 89	11106-09..... 83
00109-11.....75		10035-12..... 56	10110-01..... 53	11002-13..... 86	11027-12..... 84	11150-10..... 80
00125-11.....136		10035-15..... 56	10110-03..... 53	11002-14..... 86	11028-15..... 89	11151-10..... 80
00126-11.....136		10035-20..... 56	10110-05..... 53	11002-16..... 86	11029-14..... 88	11152-10..... 80
00272-13.....77		10035-25..... 56	10110-07..... 53	11002-18..... 86	11030-12..... 85	11153-10..... 80
00276-13.....136		10035-30..... 56	10130-05..... 109	11002-20..... 86	11031-15..... 89	11154-10..... 80
00325-00.....130		10050-00.....55	10130-10..... 109	11002-25..... 86	11032-12..... 84	11155-10..... 80
00396-01.....130		10052-11.....55	10130-20..... 109	11003-12..... 86	11036-20.....87	11158-10..... 80
00398-02.....130		10053-09.....55	10140-01.....101	11003-13..... 86	11036-90.....87	11159-10..... 80
00400-03.....130		10053-13.....55	10140-02.....101	11003-14..... 86	11040-08.....79	11160-10..... 80
00574-11.....139		10055-12..... 50	10140-03.....101	11003-16..... 86	11041-08.....79	11200-00.....72
00632-11.....75		10056-12..... 50	10140-04.....101	11003-18..... 86	11042-08.....79	11200-10.....72
00649-11.....75		10058-15.....51	10152-30..... 54	11003-20..... 86	11043-08.....79	11200-12.....72
10000-10..... 60		10059-13..... 50	10157-13..... 54	11006-12..... 84	11049-10..... 80	11200-14.....72
10000-11..... 60		10059-15.....51	10157-15..... 54	11006-15.....78	11050-10..... 80	11200-33.....71
10000-15..... 60		10060-00..... 60	10157-18..... 54	11008-13..... 86	11051-10..... 80	11203-23.....71
10002-00..... 59		10060-13..... 60	10160-13.....103	11008-15..... 86	11052-10..... 80	11203-25.....71
10002-50..... 59		10061-12.....101	10162-12..... 99	11009-13..... 86	11053-10..... 80	11210-10.....71
10003-12..... 58		10062-12.....101	10165-11.....102	11009-15..... 86	11054-10..... 80	11210-20.....71
10003-13..... 58		10063-15..... 100	10166-11.....102	11010-17.....91	11055-10..... 80	11215-01..... 40
10004-13.....57		10064-14.....101	10167-11.....102	11011-17.....91	11062-10.....81	11215-02..... 40
10006-12.....61		10065-15..... 100	10315-12..... 56	11012-18.....91	11063-07.....76	11220-21.....70
10007-12..... 59		10066-15..... 100	10316-14..... 56	11012-21.....91	11064-07.....79	11223-20.....70
10007-16..... 59		10073-14..... 50	10317-14..... 56	11012-25.....91	11065-07.....79	11231-20..... 68
10008-13.....57		10075-16..... 49	10318-14..... 56	11013-18.....91	11066-07.....79	11231-30..... 68
10010-00..... 58		10080-05..... 49	10321-08.....107	11013-21.....91	11067-07.....79	11241-30.....70
10010-10.....61		10081-10..... 49	10360-13.....107	11014-18..... 90	11069-08.....79	11242-40.....70
10011-00..... 58		10082-15..... 49	10370-13.....51	11015-18..... 90	11070-08.....79	11251-10..... 65
10011-10.....61		10083-20..... 49	10370-17.....107	11016-17.....91	11071-10.....81	11251-20..... 65
10012-00..... 58		10087-12..... 104	10370-18.....107	11017-17.....91	11072-11..... 83	11251-21..... 66
10015-00..... 58		10088-15.....103	10370-19.....107	11018-12..... 84	11073-10.....82	11251-23..... 65
10015-10.....61		10089-11..... 104	11000-12.....87	11019-12..... 84	11074-02.....82	11251-30..... 65
10020-00.....57		10090-13.....103	11000-13.....87	11020-12..... 84	11075-00.....82	11251-33.....67
10021-00.....57		10090-17.....103	11000-14.....87	11021-12..... 88	11080-02..... 90	11251-35.....67
10022-00.....57		10091-12..... 104	11000-16.....87	11021-14..... 88	11083-07.....76	11252-00..... 63
10023-00.....57		10092-12..... 104	11000-18.....87	11021-15..... 88	11084-07.....76	11252-20..... 65
10025-45.....52		10093-13..... 104	11000-20.....87	11022-12..... 84	11090-09.....77	11252-21..... 66
10025-50.....52		10094-13..... 104	11000-25.....87	11022-14..... 88	11090-10.....76	11252-23..... 65
10025-70..... 160		10095-12..... 49	11000-30.....87	11022-15..... 88	11091-15.....97	11252-30..... 65

11252-40.....65	11506-12.....84	12050-10.....117	14000-13.....29	14018-13.....32	14080-11.....27
11252-50.....63	11515-02.....41	12050-20.....117	14000-14.....29	14018-14.....32	14081-09.....26
11253-10.....66	11602-14.....86	12051-08.....116	14000-16.....29	14018-18.....32	14082-09.....26
11253-20.....64	11602-16.....90	12051-09.....116	14000-18.....29	14019-13.....32	14083-08.....15
11253-21.....64	11608-15.....86	12051-10.....116	14000-20.....29	14019-14.....32	14084-08.....15
11253-25.....64	11616-15.....85	12051-11.....116	14001-12.....29	14019-18.....32	14084-09.....15
11253-27.....67	11617-12.....85	12060-01.....110	14001-13.....29	14024-14.....33	14085-08.....15
11253-29.....64	11626-11.....67	12060-02.....110	14001-14.....29	14028-10.....22	14085-09.....15
11254-20.....63	11627-12.....85	12061-01.....110	14001-16.....29	14029-10.....22	14086-09.....27
11255-20.....65	11650-10.....80	12061-02.....110	14001-18.....29	14037-10.....28	14088-10.....18
11258-20.....73	11651-10.....80	12075-12.....110	14002-12.....29	14040-10.....19	14090-09.....16
11260-20.....68	11652-10.....80	12075-14.....110	14002-13.....29	14041-10.....19	14090-11.....16
11270-20.....69	11700-00.....82	12076-12.....110	14002-14.....29	14054-13.....30	14091-09.....16
11271-30.....69	11700-01.....82	12102-12.....113	14002-16.....29	14058-09.....20	14091-11.....16
11272-30.....69	11700-02.....82	12500-12.....112	14003-12.....29	14058-11.....20	14094-11.....16
11272-40.....69	11700-03.....82	12501-13.....112	14003-13.....29	14059-09.....20	14095-11.....16
11272-50.....69	11700-04.....82	12502-12.....113	14003-14.....29	14059-11.....20	14101-14.....31
11273-20.....64	11900-14.....78	12502-14.....113	14003-16.....29	14060-09.....17	14105-12.....25
11273-22.....64	12001-13.....112	12503-15.....114	14003-18.....29	14060-10.....17	14106-09.....28
11274-20.....69	12002-12.....113	12504-15.....114	14003-20.....29	14060-11.....17	14108-09.....28
11280-11.....139	12002-14.....113	12505-15.....115	14004-12.....29	14061-09.....17	14110-15.....34
11281-11.....139	12003-15.....114	12510-14.....111	14004-13.....29	14061-10.....17	14110-17.....34
11282-11.....139	12004-16.....114	12512-12.....113	14004-14.....29	14061-11.....17	14111-15.....34
11293-00.....68	12004-18.....114	12565-14.....111	14004-16.....29	14062-09.....17	14111-17.....34
11294-00.....70	12005-15.....115	13002-10.....96	14004-18.....29	14062-10.....17	14116-14.....33
11295-00.....65	12010-14.....111	13003-10.....96	14005-12.....29	14063-09.....17	14116-18.....33
11295-10.....65	12018-12.....119	13004-14.....94	14005-13.....29	14063-11.....17	14117-14.....33
11295-20.....63	12020-00.....121	13005-14.....94	14005-14.....29	14064-11.....24	14117-18.....33
11295-51.....65	12020-09.....121	13006-12.....92	14005-16.....29	14065-11.....24	14130-17.....30
11297-00.....69	12022-09.....121	13007-12.....92	14007-14.....30	14066-11.....24	14131-14.....31
11297-10.....69	12023-00.....121	13008-12.....93	14008-14.....29	14067-11.....24	14160-10.....17
11370-31.....74	12028-12.....119	13009-12.....93	14010-15.....34	14068-12.....19	14161-10.....17
11370-32.....74	12029-12.....119	13010-12.....93	14010-17.....34	14069-12.....19	14171-10.....28
11370-40.....74	12030-01.....120	13011-12.....93	14011-15.....34	14070-12.....19	14173-12.....25
11370-42.....74	12030-04.....120	13012-12.....93	14011-17.....34	14071-12.....19	14184-09.....15
11373-12.....74	12030-20.....120	13013-14.....95	14012-15.....35	14072-10.....27	14185-09.....15
11373-22.....74	12030-22.....120	13014-14.....95	14012-17.....35	14074-09.....23	14200-21.....35
11399-80.....74	12030-23.....120	13015-14.....95	14013-15.....35	14074-11.....23	14370-22.....18
11399-87.....74	12035-00.....120	13018-14.....94	14013-17.....35	14075-09.....23	14370-23.....18
11412-11.....72	12040-01.....119	13019-14.....94	14014-17.....35	14075-11.....23	14501-14.....30
11413-11.....72	12040-02.....119	13020-12.....92	14015-17.....35	14076-09.....26	14502-14.....30
11445-12.....73	12040-03.....119	13021-12.....92	14016-14.....33	14077-09.....24	14504-14.....30
11480-11.....73	12050-01.....117	13108-12.....93	14016-18.....33	14077-10.....24	14505-14.....30
11485-11.....73	12050-02.....117	13109-12.....93	14017-14.....33	14078-10.....22	14508-15.....32
11487-11.....73	12050-03.....117	14000-12.....29	14017-18.....33	14079-10.....22	14509-15.....32

INDEX

14510-15 34	15010-09 11	15750-11 7	17000-04 123	18010-02 158	18052-12 135
14510-17 34	15010-10 11	15751-11 7	17001-07 126	18020-00 117	18053-28 133
14511-15 34	15011-12 10	16000-14 38	17002-02 123	18020-01 117	18054-28 133
14511-17 34	15012-12 10	16001-15 38	17003-03 123	18020-02 117	18055-01 132
14512-15 34	15013-12 10	16002-18 37	17004-03 123	18020-03 117	18055-02 132
14512-17 34	15015-11 11	16004-16 38	17004-05 124	18020-20 117	18055-03 132
14518-14 32	15017-10 10	16005-16 38	17005-03 123	18020-30 117	18055-04 132
14518-18 32	15018-10 4	16015-17 36	17005-04 124	18020-40 117	18055-05 132
14519-14 32	15019-10 4	16016-17 36	17006-05 126	18020-50 117	18055-06 132
14519-18 32	15020-15 7	16020-14 36	17007-08 126	18020-60 117	18056-14 132
14531-09 31	15021-15 7	16021-14 36	17008-07 125	18020-70 117	18057-14 132
14558-09 21	15023-10 9	16022-15 37	17009-07 125	18025-10 77	18060-20 141
14558-11 21	15024-10 9	16023-15 37	17009-08 125	18026-10 78	18061-10 141
14559-09 21	15025-10 9	16025-14 47	17010-07 125	18030-30 117	18061-15 141
14559-11 21	15027-18 12	16030-12 44	17011-10 127	18030-40 117	18061-18 141
14568-09 20	15028-18 12	16030-16 44	17012-11 128	18030-50 117	18061-20 141
14568-12 20	15030-14 13	16044-10 44	17012-13 128	18030-60 117	18061-22 141
14569-09 20	15031-14 13	16050-15 45	17017-10 127	18030-70 117	18061-24 141
14569-12 20	15032-08 14	16060-11 41	17018-11 128	18030-80 117	18061-38 141
14574-09 23	15032-13 14	16101-10 42	17020-17 122	18035-01 159	18061-50 141
14574-11 23	15033-09 9	16102-11 42	17021-13 122	18035-02 159	18061-75 141
14575-09 23	15036-14 13	16103-11 41	17022-13 122	18035-03 159	18062-12 135
14575-11 23	15037-14 13	16104-14 46	17023-13 122	18035-05 159	18062-13 135
14958-09 21	15040-11 9	16104-19 46	17370-53 124	18035-35 159	18063-13 135
14958-11 21	15042-11 9	16105-16 46	18000-00 158	18035-50 159	18064-20 141
14959-09 21	15070-08 5	16106-14 46	18000-01 158	18035-80 159	18065-20 141
14959-11 21	15071-08 5	16107-14 39	18000-02 158	18036-19 159	18067-11 99
15000-00 4	15110-08 12	16109-14 39	18000-03 158	18036-22 159	18080-01 134
15000-01 6	15111-08 12	16120-14 36	18000-04 158	18036-24 159	18080-02 134
15000-02 6	15123-12 6	16121-14 36	18000-10 138	18038-45 133	18080-03 134
15000-03 3	15124-12 6	16130-15 45	18000-15 144	18039-45 133	18090-00 156
15000-04 3	15300-00 14	16140-11 43	18000-18 157	18040-00 134	18105-01 159
15000-08 3	15370-50 8	16141-11 43	18000-20 157	18040-11 130	18105-03 159
15000-10 4	15370-52 8	16142-11 43	18000-30 150	18040-14 131	18106-01 159
15000-11 6	15371-92 12	16143-12 43	18000-35 163	18040-22 130	18131-12 136
15000-12 6	15396-00 5	16144-13 43	18000-45 149	18040-33 130	18132-12 136
15001-08 3	15396-01 5	16150-24 47	18000-46 149	18050-28 133	18144-30 133
15002-08 3	15400-12 7	16152-11 44	18000-50 149	18050-35 133	18155-13 81
15003-08 4	15401-12 7	16152-12 44	18000-51 149	18050-50 133	18200-01 129
15004-08 4	15514-12 10	16152-15 44	18004-18 157	18051-28 133	18200-02 129
15005-08 4	15610-08 6	16220-14 36	18004-23 157	18051-35 133	18200-03 129
15006-09 8	15615-08 6	16221-14 36	18004-27 157	18051-50 133	18200-04 129
15007-08 5	15617-08 6	17000-01 123	18004-50 157	18052-01 133	18200-05 129
15008-08 4	15650-11 11	17000-02 123	18010-00 158	18052-02 133	18200-06 129
15009-08 8	15651-11 11	17000-03 123	18010-01 158	18052-03 133	18200-07 129

18200-08.....129	20830-01.....155	26002-10.....109	29055-00.....144	91308-12.....178
18200-09.....129	20830-02.....155	26002-15.....109	29055-12.....144	91309-12.....178
18200-10.....129	20830-03.....155	26002-20.....109	29060-00.....147	91400-10.....173
18200-11.....129	20830-04.....155	26007-01.....109	29060-01.....147	91400-12.....173
18200-12.....129	20830-05.....155	26007-02.....109	29060-02.....147	91400-14.....173
18200-20.....129	20830-06.....155	26007-03.....109	29060-03.....147	91401-10.....173
18200-50.....129	20840-01.....153	26007-04.....109	29060-04.....147	91401-12.....173
18320-11.....133	20840-02.....153	26007-05.....109	29060-05.....147	91401-14.....173
18374-43.....133	20840-03.....153	26016-12.....108	29060-06.....147	91402-10.....173
18374-44.....133	20842-03.....153	26018-17.....108	29066-00.....147	91402-12.....173
18403-11.....139	20850-00.....154	26029-10.....83	29066-01.....147	91402-14.....173
18406-11.....139	20850-10.....154	26030-10.....83	29066-02.....147	91413-14.....174
18406-13.....139	20890-51.....154	26100-00...48,108	29066-03.....147	91460-11.....173
18555-01.....132	20890-72.....154	27000-01.....165	29066-04.....147	91461-11.....173
18555-02.....132	23005-10.....118	28000-07.....148	29071-01.....146	91500-09.....173
18555-03.....132	24201-00.....143	28000-10.....148	29071-02.....146	91501-09.....173
18555-04.....132	24201-01.....143	28000-12.....148	29071-03.....146	91601-11.....174
18601-15.....137	24212-01.....142	28001-00.....150	29071-04.....146	91604-09.....174
18602-15.....137	24212-02.....142	28001-02.....150	29071-05.....146	91606-07.....179
18603-14.....137	24214-02.....142	28015-15.....152	29071-06.....146	91706-05.....179
19003-00.....165	24215-02.....142	28015-25.....171	29071-07.....146	91815-11.....175
19003-01.....165	24220-00.....143	28020-20.....152	29071-08.....146	
19007-05.....157	24220-10.....143	28020-28.....171	29080-00.....146	
19007-07.....157	24220-50.....143	28030-02.....166	30051-10.....160	
19007-09.....157	24220-90.....143	28030-03.....166	30076-14.....160	
19007-14.....157	26000-25.....109	28030-04.....166	30085-15.....162	
19007-21.....157	26000-30.....109	28030-10.....166	30085-30.....162	
19007-29.....157	26000-35.....109	28030-20.....169	30087-00.....163	
19008-07.....157	26000-40.....109	28030-25.....169	30087-20.....163	
19008-09.....157	26000-45.....109	28040-30.....168	37000-00.....161	
19008-14.....157	26000-50.....109	28050-30.....168	37500-00.....161	
19009-00.....48	26000-55.....109	28050-35.....168	37500-05.....161	
19009-05.....157	26000-60.....109	28080-10.....167	91003-12.....179	
19009-07.....157	26000-65.....109	28080-90.....168	91100-12.....175	
19009-09.....157	26000-70.....109	29000-00.....145	91100-16.....175	
19010-00.....48	26001-25.....109	29000-10..145,170	91106-12.....175	
19010-10.....48	26001-30.....109	29008-01.....144	91110-10.....177	
20311-21.....154	26001-35.....109	29008-12.....144	91113-10.....177	
20325-00.....151	26001-40.....109	29008-22.....145	91115-10.....177	
20325-10.....151	26001-45.....109	29015-50..145,170	91117-10.....177	
20350-00.....151	26001-50.....109	29025-01.....164	91121-12.....175	
20810-01.....152	26001-55.....109	29025-02.....164	91127-12.....175	
20810-02.....152	26001-60.....109	29026-10.....164	91150-20.....176	
20820-00.....152	26001-65.....109	29027-00.....162	91197-00.....176	
20830-00.....155	26001-70.....109	29051-45.....144	91201-13.....178	

FINESCENCE.COM · MOST ITEMS SHOWN ACTUAL SIZE

Alphabetical Index

A

Absorption Spears and Triangles	159
Adson forceps	84-85
<i>Adson</i>	84
<i>Adson-Brown</i>	85
<i>Adson DeBakey</i>	85
<i>Adson-Graefe</i>	85
Micro <i>Adson</i>	84
Micro <i>Adson</i> Fenestrated	84
<i>Agricola</i> retractor	124
<i>Allis</i> hemostatic forceps	97
<i>Alm</i> retractors	125
Applicators	
Micro serrefine	130-132
Suture clips	119-121
Applying forceps, clamp	131-132
Arc blade	56
Arteriotomy knives	50-53
Artery scissors	27
<i>Austin</i> Chisel	49
AutoClip® System	121

B

<i>Baby-Beyer</i>	37
<i>Baby-Mixer</i> hemostatic forceps	95
<i>Backhaus</i> towel forceps	96
Balanced Instruments	137
Ball Tipped	
Scissors	27
Spring Scissors	9
<i>Beebee</i> bone scissors	44
<i>Beyer</i> rongeurs	37
<i>Biemer</i> spring scissors	14
<i>Bishop-Harman</i> forceps	79
<i>Bonn-Strabismus</i> scissors	15
Blade	
Breakers	55
Cartridges	61
Holders	52-61
Blades	
Breakable	55
Ceramic	52
Scalpel	52-61
<i>Blair</i> retractor	122
<i>Boehler</i> bone cutter	45

Bone

Cutters	40-47
Delicate scraper	49
Forceps	41
Nipper	42-43
Pliers	47
Rongeurs	36-39
Scissors	44
Scissors, Student	174
Scraper	49
Screw forceps	48
Screws, self-tapping	48
Shears	47
Wax	48

Bone cutters

<i>Beebee</i>	44
Bone Trimmers	40
<i>Boehler</i>	45
Cartilage Cutter	40
<i>Cleveland</i>	46
Dumont carbon steel	40
Dumont epoxy coated	40
<i>Liston</i>	46
<i>Littauer</i>	44
Malleus Nipper	43
Micro	41
Offset Bone Nipper	42
Skull Flap	45
Spring Scissors	43
Tungsten Carbide	41, 44

Bone Nipper

Bonn

Artery	27
Forceps	76
Micro probes	100
Scissors	15, 27
Strabismus	15

Book and DVD-*Suturing Principles*

<i>Bowman</i> retractor	126
Bulldog clamps	133
Burrs	157

C

Calipers

<i>Castroviejo</i>	163
Digital electronic	163
Plastic Vernier	163
Cane blade	56

Cannulation aids	135-139
Cartilage Cutter	40
Cases, instrument	152-155

Castroviejo

Caliper	163
Needle holders	110-111
Spring scissors	10
Cauterizers, vessel	158
CeramaCut, scissors	21

Ceramic

About	183
Blades	52
Cutter	160
Dumont forceps	63, 69
Scissors	21
Spring scissors	7
Titanium	10

Chisels

<i>Austin</i>	49
Dissecting	49
Circle forceps	83
Circle knife	51

Clamps

Applying forceps	131-132
Bulldog Artery Spring Clamps	133
Bulldog Type Serrefines	133
<i>Dietrich</i> Bulldog Clamps	133
Double Micro Clamps	130
Mini Serrefines	133
Moria	133
S&T	130
<i>Schwartz</i> Micro Serrefines	133
Silver Neuro Clips	134
Titanium	132
Vascular	130, 132-133
Vascular Occluders	134

<i>Cleveland</i> bone cutters	46
Clip-On LED Light	169
Clipper style scissors	14
<i>Cohan-Vannas</i> spring scissors	5
<i>Colibri</i> retractor	123
<i>Colibri</i> retractor (mini)	123
Combination Probe and Spatula	103
Combination Spoon and Spatula	103
Contacts, Gold wire	165
Corers, sample	159
Cover glass forceps	82
Cover slip forceps	67
<i>Crile</i> hemostatic forceps	94

Crile-Wood needle holders.....	114
Curettes, micro.....	49

D

DeBakey forceps.....	85
Decapitation scissors.....	35
Demagnetizer.....	144
Diamond knives.....	52
Dietrich bulldog clamps.....	133
Digital Electronic Caliper.....	163
Dilator, vessel.....	136-137
Disposable safety scalpels.....	60-61
Disposable scalpel box.....	59
Dissecting Chisel.....	49
Dissecting knives.....	50-51
Double-Ended Micro Spatula.....	104
Double Micro Clamps.....	130
Double pronged tissue pick.....	99
Double tip protectors.....	147
Dowell spring scissors.....	9
Dressing forceps.....	80, 86-87
Dumont	
Bone Cutter.....	40
Ceramic.....	63, 69
Coverslip.....	67
Epoxy.....	70-71
Forceps.....	40, 63-73, 139
Forceps repair kit.....	145
Forceps sharpening stones.....	145
Laminectomy.....	70
Mini Forceps.....	72
Slide Lock.....	67
Super Fine Tip.....	63
Teflon.....	67
Titanium.....	65, 69
Tweezers.....	63-72, 139
Dura cutting knife.....	50
Dura hook.....	99

E

Ear	
Punches.....	142
Tags.....	143
Tattoo system.....	143
Electronic timers.....	165
Etched micro needles.....	109
Eschenbach magnifiers.....	168-169, 171

Extra Fine Bonn.....	15
Explorers.....	101

F

Feeding needles.....	141
File set.....	160
Filters, sterilization containers.....	153
Fine	
Bonn.....	15
Forceps.....	73-79
Iris Scissors.....	16
Scissors.....	15-28
Spring scissors.....	3-14
Fine Hemostat.....	92
Fixation forceps, Pierse.....	81
Fomon retractor.....	122
Forceps	
Adson.....	84-85
Adson-Brown.....	85
Adson DeBakey.....	85
Adson-Graefe.....	85
Applying and removing.....	119
Bishop-Harman.....	79
Bone.....	41
Bonn.....	76
Cannulation.....	139
Ceramic.....	63, 69
Circle.....	83
Cover glass.....	82
Cover slip.....	67
Cross action.....	82
Dressing.....	80, 86-87
Dumont.....	63-72, 139
Epoxy coated.....	70-71
Fine.....	73-79
Fixation.....	81
Gerald.....	90
Gillies.....	89
Graefe.....	80
Grasping.....	78
Hemostatic.....	92-97
Insect handling.....	83
Laminectomy.....	70
London.....	90
Micro.....	63-76
Mirror Finish.....	65, 72, 77
Moria.....	74
Mouse laminectomy.....	70

Mouse handling.....	87
Narrow Pattern.....	86
Octagon.....	79
Organ holding.....	89
Pierse fixation.....	81
Pin & bone screw holding.....	48, 108
Plastic.....	82
Potts-Smith.....	91
Repair kit.....	145
Ring.....	83
Russian.....	89
S&T.....	75, 77, 139
Self-Closing.....	73
Semken.....	86
Standard Forceps.....	81-91
Standard Pattern.....	87
Student.....	175-177
SuperGrip.....	75
Suture tying.....	77-78
Taylor.....	91
Titanium.....	65, 69, 80, 86, 90
Tungsten carbide.....	84
Vetro Grasping.....	78
Vial.....	78
Friedman rongeur.....	38
Friedman-Pearson rongeur.....	36

G

Galilean Loupes.....	168
Gavage feeding needles.....	141
Gelpi retractor.....	127
GenoPunch.....	142
Gerald forceps.....	90
Gillies forceps.....	89
Gold wire contacts.....	165
Goldstein retractor.....	123
Graefe forceps.....	80
Graefe knife.....	50
Grasping forceps.....	78
Grease, silicone.....	144
Gross anatomy	
Knives.....	54
Probe.....	103
Scalpel.....	60
Scissors.....	29-35
Guthrie retractor.....	122

H

<i>Halsey</i> needle holders	112
<i>Halsted-Mosquito</i> hemostatic forceps	93
Handles, scalpel	57-61
Hardened Fine Iris Scissors	16
<i>Hartman</i> hemostatic forceps	96
Headband magnifier	166
Headband, spectacles	168
<i>Heiss</i> retractor	127
Hemostatic forceps	
<i>Allis</i> Forceps	97
<i>Baby-Mixer</i>	95
<i>Backhaus</i> Towel Forceps	96
<i>Crile</i>	94
Fine	92
<i>Halsted-Mosquito</i>	93
<i>Hartman</i>	96
<i>Kelly</i>	94
Left-handed	93
<i>Micro-Mosquito</i>	93
<i>Providence-Hospital</i>	95
Smooth	92
Student	178
Ultra Fine	92
Hippocampal dissecting tools	106
Holders	
Blade	52-61
Ceramic blade	52
Micro needle	110
Needle	110-115, 178
Pin	108
Scalpel blade	52-61
Hooks	
Micro	101-102
Spinal cord	99
Y-Hook	102
V-Hook	135
Hot bead sterilizers	149

I

Identification, animal	
Tattoo system	143
Ear punches	142
Ear tags	143
Insect	
Handling forceps	83
Pins	109
Insert	
Pin holders	108, 179
Pins	109

Instrument

Beaker	156
Cases	152-155
Holding spring	156
Oil and Oil Pen	144
Sharpening Stones	144-145
Tape, identification	146
Tip protectors	147
Iridectomy scissors	3-14
Iris Spatulae	104

K

<i>Kaye</i> scissors	28
<i>Kelly</i> hemostatic forceps	94
Knives	
Circle	51
Diamond	52
Dura cutting	50
Gross anatomy (blade)	60
Micro	50-52
Sichel	50
Stone age	53
<i>Von Graefe</i>	50

L

<i>LaGrange</i> scissors	25
Laminectomy forceps, mouse	70
Large Loops	19, 28, 31
Left-handed	
Fine scissors	17
Hemostatic forceps	93
Ligation aid	135
Needle holders	113-114
Surgical scissors	29
Universal scissors	161
<i>Lempert</i> rongeur	38
Lens paper	145, 170
<i>Lexer-Baby</i> scissors	22
Ligation aid	135
Ligature scissors	26
<i>Lister</i> scissors	31
<i>Liston</i> gross anatomy cutter	46
<i>Littauer</i> bone cutter	44
Live Insect Handling Forceps	83
Lubricant, silicone	144
<i>Luer</i> rongeur	38

M

Magnetic sterilization mat	151
Magnifiers	
<i>Eschenbach</i> Clip-On LED Light	169
Galilean Loupes	168
Headband	168
Interchangeable Headset with LED	167
Magnifying Loupe with Micrometer and LED	164
Spectacles	166-169
Stands	171
Scribolux	171
Vario Flex	171
Malleus Nipper	43
Mandrel	157
Manipler®, skin stapler	120
Manual and DVD, <i>Suturing Principles and Techniques in Laboratory Animals</i>	118
Marker, skin	150
Mat, silicone	151
<i>Mathieu</i> needle holder	111
Max Detail spectacles	169
<i>Mayo</i> scissors	34
<i>Mayo-Hegar</i> needle holder	114
<i>Mayo-Noble</i> scissors	35
<i>Mayo-Stille</i> scissors	35
<i>Metzenbaum</i> scissors	
<i>Baby</i> scissors	32
Scissors	33
ToughCut <i>Metzenbaum</i>	33
Tungsten Carbide <i>Metzenbaum Fino</i>	32
<i>Michel</i> suture clips	119
Micro-	
Bone cutter	41
Cannulation System	138
Curettes	49
Dissecting knives	50-52
Dissection scissors	3-14
Forceps	63-76
Hooks	101-102
Needles, etched	109
Needle holders	110
Needles and sutures	116-117
Points	100, 102
Probes	100-102
Rongeurs	36
Serrefine applicators	131-132
Serrefines	130, 132
Spatulae	102-104
Micrometers	164

Micro-Mosquito Hemostat	93
Mini-Biemer spring scissors	14
Mini-Colibri retractor.....	123
Mini-Lister.....	31
Mini-Vannas spring scissors	5
Minutien pins.....	109
Mirror finish	
Cutting spoon.....	107
Forceps	65, 72
Micro spatula	104
Suture tying forceps	77
Moria	
Forceps	74
Instrument case	154
Retractors.....	124
Scissors	18
Spoons.....	107
Spring scissors	12
Vascular clamps	133
Mosquito hemostatic forceps.....	93
Mouse	
Feeding needles	141
Laminectomy forceps.....	70
Handling forceps.....	87
N	
Narrow Pattern Forceps.....	86
Needle Holders	
Castroviejo.....	110
Castroviejo with Tungsten Carbide Jaws ..	111
Crile-Wood.....	114
Halsey.....	112
Halsey with Tungsten Carbide Jaws.....	112
Mathieu	111
Mayo-Hegar	114
Needle Holder with Suture Cutter	110
Olsen-Hegar with Suture Cutter	113
Round Handled.....	110
Ryder Mini-Select Needle Holder	115
Slim Elongated Needle Holder	115
Needles	
Etched, micro.....	109
Feeding	141
Micro needles and sutures	116
Neuro punches.....	159
Neuro clips, silver	134
Noyes spring scissors.....	10
Nylon suture thread	117

O

Obsidian scalpels.....	53
Occluders, vascular	134
Octagon Forceps.....	79
Offset Bone Nipper	42
Oil, instrument	144
O-rings for forceps	72
Olsen-Hegar needle holders	113
Optical cleaning kit.....	145, 170
Organ holding forceps	83

P

Pascheff-Wolff spring scissors.....	12
Pearson rongeur.....	36
Pen	
Oil.....	144
Skin Marker	150
Perforated Spoons.....	107
Pick	
Double Pronged Pick	99
Pierse fixation forceps.....	81
Pin holders	108
Pins	
Etched Tungsten Micro Needles	109
Insect.....	109
Insert	109
Minutien	109
Plastic cases.....	152-155
Plastic forceps	82
Plastic sterilization container	152-153
Plastic Vernier Caliper.....	163
Potts-Smith forceps	91
Pouches, sterilization	148
Probes	
Bonn Micro Probes.....	100
Combination Probe and Spatula	103
Gross Anatomy Probe	103
Micro Hooks	101-102
Micro Points	100, 102
Probes and Explorers.....	101
Vessel Dilating Probe.....	103
Providence-Hospital hemostatic forceps.....	95
Punches	
Ear.....	142
Neuro.....	159

R

Repair kit, forceps	145
---------------------------	-----

Retractors

Agricola	124
Alm Retractors	125
Blade.....	123-125
Blair.....	122
Bowman.....	126
Colibri.....	123
Fine Adjustable Wire Retractor	124
Fomon	122
Heiss.....	127
Gelpi	127
Goldstein	123
Guthrie	122
Large.....	124-129
Mini-Goldstein.....	123
Mini-Colibri.....	123
Moria	124
Slide.....	123
Small.....	123
Speculum.....	124
Spring-Loaded.....	126
Student.....	179
Systems.....	129
Weitlaner-Locktite	128
Wire.....	124
Wullstein	128
Ring forceps.....	83
Rongeurs	
Baby-Beyer	37
Beyer.....	37
Bone.....	36-38
Friedman.....	38
Friedman-Pearson.....	36
Lempert.....	38
Luer	38
Micro	36
Pearson.....	36
Round Handled	
Needle holder.....	110
Spring scissors	6
Suture tying forceps	78
Rulers	
Label Tape.....	162
Steel	162
Russian forceps	89
S	
S&T	
Cannulation forceps.....	139

Forceps.....	75, 77, 131, 136, 139	<i>Strabismus</i>	23	Perforated Spoon.....	108
Instrument beaker.....	156	Student.....	173-174	Spring scissors	
Micro needles and suture.....	116	Student Lister.....	174	Angled.....	3-5, 8-9, 11-13
SuperGrip forceps.....	75	Surgical.....	29-35	Ball Tipped.....	8
Suture tying forceps.....	77	Titanium.....	5	<i>Biemer</i>	14
Vascular clamps.....	130	ToughCut.....	6, 15, 20, 25, 30, 33-34	Bone Cutter.....	44
Vessel dilator.....	136	ToughCut with tungsten carbide.....	21	<i>Bonn</i>	15
Safety scalpel		Tungsten carbide.....	9, 20, 21, 23, 30, 32, 34	<i>Castroviejo</i>	10
Blade cartridges.....	61	Universal.....	160	Ceramic coated.....	7
Disposable.....	60	Utility.....	161	Clipper Scissors II.....	14
Handle.....	61	Vitrectomy.....	13	<i>Cohan-Vannas</i>	5
Sample corers.....	159	<i>Walton</i>	24	<i>Dowell</i>	9
Saw, Circular.....	157	Screwdrivers.....	160	Extra fine.....	3-5, 12-13
Scalpel		Screws, self-tapping bone.....	48	Iridectomy.....	3-14
Blade handles.....	52-61	Secure scalpel handle.....	58	<i>Mini-Vannas</i>	3
Blade removers.....	59	Self closing forceps.....	73	Moria.....	5, 7, 12, 18
Blades.....	52-61	Self Holding Pin and Bone Screw Forceps ..	48, 106	<i>Noyes</i>	9
Ceramic blades.....	52	Self-Sealing Sterilization Pouches.....	148	<i>Pascheff-Wolff</i>	12
Disposal Box.....	59	<i>Semken</i> forceps.....	86	Round Handled.....	6
Disposal Safety.....	60	Serrefines.....	132, 133	Serrated.....	4, 6
Gross anatomy.....	60	Sharpening stones.....	144-145	Student <i>Vannas</i>	173
Safety Scalpels.....	60-61	<i>Shea</i> scissors.....	25	Superior Line Spring Scissors.....	3
Stone age.....	53	Shears, bone.....	47	Superior Line Vannas-Tubingen	
<i>Schwartz</i> micro serrefine.....	133	<i>Sichel</i> knife.....	50	Spring Scissors.....	4
Scissors		Silicone lubricant.....	144	Titanium <i>Vannas</i>	5
Bone.....	44	Silicone mats.....	151	ToughCut.....	6
<i>Bonn</i>	15, 27	Silicone tips, forceps.....	87	Trident II.....	11
CeramaCut.....	21	Silk sutures.....	117	<i>Vannas</i>	3-7, 173
Clipper.....	14	Skin marker.....	150	<i>Vannas-Miniature</i>	5
Decapitation.....	35	Skin staplers.....	120-121	<i>Vannas-Tubingen</i>	4
Dissector.....	26	Skull flap cutter.....	45	<i>Vannas-Wolff</i>	7
<i>Dowell</i>	9	Slide retractors.....	123	Vessels.....	14
Fine.....	15-28	Spatulae		Vitrectomy.....	13
<i>Kaye</i>	28	Combination Spoon and Spatula.....	103	<i>Wescott</i>	10
<i>LaGrange</i>	25	Combination Probe and Spatula.....	103	Spring, instrument holding.....	156
Large loops.....	19, 28, 31	Double-Ended Micro Spatula.....	104	Stage micrometers.....	164
Left-handed.....	17, 29, 161	Hippocampal Dissecting Tool.....	105	Standard Pattern Forceps.....	87
<i>Lexer-Baby</i>	22	Iris Spatulae.....	104	Standard Pattern Scissors	
Ligature.....	26	Micro Spatula.....	102, 104	Large Loops.....	31
<i>Lister</i>	31	Micro Spatula Kit.....	105	Scissors.....	29-31
<i>Mayo</i>	34	Mini Hippocampal Dissecting Tool.....	105	Serrations.....	31
<i>Mayo-Noble</i>	35	Mirror Finish Micro Spatula.....	104	ToughCut.....	30
<i>Mayo-Stille</i>	35	Spears, absorption.....	159	Tungsten Carbide.....	30
<i>Metzenbaum</i>	32-33	Spectacles Headband.....	168	Staplers, skin.....	120-121
Mini- <i>Lister</i>	31	Spectacles, magnifier.....	166-169	Sterilizers, hot bead.....	149
Moria.....	5, 7, 12, 18	<i>Spencer</i> Ligature.....	26	Sterilizing containers.....	152-153
<i>Shea</i>	25	Spinal Cord Hook.....	99	Sterilizing mats.....	151
<i>Spencer</i> Ligature.....	26	Spoons		Sterilizing pouches.....	148
Spring.....	3-14	Mini Perforated Spoon.....	108	Sterilizing wraps.....	152
Standard Pattern.....	29	Mirror Finish Cutting Spoon.....	108	<i>Stevens</i> tenotomy scissors.....	24
<i>Stevens</i> Tenotomy.....	24	Moria Spoon.....	108	Stone Age Scalpels.....	53

Fine Science Tools Online

Helping you find and buy the right tools

Whether you contact us at our offices, through dealers, or online—our priority is customer service. As part of that service, we have a variety of features to help you research, quote, and purchase Fine Science Tools products at **finescience.com**. These features enhance and streamline your shopping experience by helping you:

- Quickly identify products by type and attributes with advanced search
- Get detailed specs and enlarged product views
- Use the extensive FAQs and pop-up glossary
- Save quotes and convert to orders online
- Pay with credit card or purchase order*
- View your online order history
- Track your shipments

*Payment by purchase order is available only for customers with a Net 30 account.

Our website is more engaging and informative than ever.



Zoom
Feature



High-Resolution
Images



Multi-Language
Support



Updated
Event Listings

We are continuously adding new products to our inventory.
Visit **finescience.com** to view all of our products.

Featured Products Online

Our Featured Products are available in limited quantities, for a limited time while supplies last. Please visit our website, **finescience.com** for updates on what's new and currently available.

All of our European suppliers are ISO 9001 certified.

All FST surgical instruments are made from the finest German stainless steel alloys (unless otherwise noted) and manufactured by skilled European craftsmen.

Most surgical instruments are shown actual size. As these instruments are handcrafted, dimensions may vary slightly from those stated in this catalog.

THE INFORMATION IN THIS CATALOG IS ACCURATE TO THE BEST OF OUR KNOWLEDGE. DESIGNS, STYLES AND DIMENSIONS DEPICTED IN THIS CATALOG ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL RECOMMENDATIONS OR SUGGESTIONS ARE MADE WITHOUT GUARANTEE, AND WE DISCLAIM ANY LIABILITY INCURRED IN CONNECTION WITH ANY RECOMMENDATION. WITH THE PURCHASE OF ANY PRODUCT FROM THIS CATALOG THE USER ASSUMES ALL RISKS AND LIABILITIES WHATSOEVER IN THE USE OF SUCH PRODUCTS. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE IN TORT OR CONTRACT FOR ANY LOSS OR DAMAGE (DIRECT, INCIDENTAL, OR CONSEQUENTIAL) ARISING OUT OF THE USE, MISUSE, OR INABILITY TO USE SUCH PRODUCT.

FST IS A REGISTERED TRADEMARK OF FINE SCIENCE TOOLS INC. FINE SCIENCE TOOLS, TOUGH CUT, CERAMA CUT, AND FINE SURGICAL INSTRUMENTS FOR RESEARCH ARE TRADEMARKS OF FINE SCIENCE TOOLS INC. FST, TOUGH CUT, AND CERAMA CUT ARE REGISTERED TRADEMARKS OF FINE SCIENCE TOOLS (USA) INC. FINE SCIENCE TOOLS AND FINE SURGICAL INSTRUMENTS FOR RESEARCH ARE TRADEMARKS OF FINE SCIENCE TOOLS (USA) INC. FINE SCIENCE TOOLS AND FST ARE REGISTERED TRADEMARKS OF FINE SCIENCE TOOLS GMBH.

© COPYRIGHT 2020 THE TEXT, PHOTOS AND DRAWINGS CONTAINED IN THIS CATALOG ARE PROPRIETARY TO FINE SCIENCE TOOLS INC. AND MAY ONLY BE COPIED, DUPLICATED OR OTHERWISE REPRODUCED WITH THE WRITTEN CONSENT OF FINE SCIENCE TOOLS INC.

製品情報

記載されております写真は実物大です。(ただし、一部縮小・拡大されております)

Forceps

- Tip Size(チップサイズ)..... 各ピンセットの先端の幅×厚みを記載しています。
- Dumont Tips(先端部)
 - ・Dumont's Finest Tips..... #5SF:11252-00、#5:11254-20、#7:11274-20が最精密モデルです。
 - ・Biology(バイオロジー)..... 生物科学実験に適した精密ピンセット。Standardの1/2の細さです。
 - ・Standard(スタンダード)..... 顕微鏡下での精密作業用に作られています。
- Dumont Alloys(合金の種類)
 - ・Carbon(カーボン)..... 硬く、酷使に耐えられます。非常に錆び易く磁気を帯びます。
 - ・Dumostar(デュモスター)..... 最も防錆性、耐磨耗性、非磁性にすぐれ、金属疲労に強く500℃までの高温に耐えられます。
 - ・Inox(イノックス)..... カーボンスチールにクロムを加え耐蝕性を高めたもの。硬度はやや損なわれます。
 - ・Dumoxel (デュモクセル)..... ステンレススチールの中で最高級の材質で、十分な硬度を有し最も人気のある材質です。磁化されません。
 - ・Titanium(チタニウム)..... Inoxほど硬度はないが防錆、柔軟性にすぐれ、軽量で指が疲れにくく使いやすい材質です。100%磁化されず、430℃の高温に耐えられます。
- ★ Hardness(硬度)..... Carbon > Dumostar > Inox > Dumoxel > Titanium の順です。

Scissors

- ToughCut(タフカット)
 皮膚を切る場合に適した刃を備えています。一方は鋸状刃で皮膚を逃がさず、もう片方の鋭いカミソリ刃でスムーズにカットできる為、普通のハサミより手が疲れません。
- Tungsten Carbide
 (タングステンカーバイド) 合金の中でも特に硬度のある炭化タングステンを作業面に使用したことにより、耐久性に優れており、ステンレススチール製品と比較して、約2倍長持ちします。

Muromachi
輸入発売元

室町機械株式会社

本社	〒103-0022	東京都中央区日本橋室町4-2-1	TEL 03-3241-2444	FAX 03-3241-2940
大阪営業所	〒532-0012	大阪市淀川区木川東4-5-3	TEL 06-6302-1277	FAX 06-6302-5026
福岡営業所	〒812-0053	福岡市東区箱崎1-4-1ラフィネ箱崎	TEL 092-651-7750	FAX 092-651-7751
E-mail: fst@muromachi.com		URL: http://www.muromachi.com		



**Scissors, Bone Instruments
& Scalpels**
pages 3–61



Forceps & Hemostats
pages 63–97



**Probes, Needle Holders, Thread,
Retractors & Clamps**
pages 99–139



**Surgical & Laboratory
Accessories**
pages 141–171



Student Quality Instruments
pages 173–179



Reference Pages
pages 181–200



INTERNATIONAL

Fine Science Tools Inc.

410-197 Forester Street
North Vancouver, British Columbia
Canada V7H 0A6

Telephone +1 800-665-5355 / +1 604-980-2481

Fax +1 800-665-4544 / +1 604-987-3299

E-Mail canada@finescience.com

Web finescience.ca



Fine Science Tools (USA) Inc.

4000 East 3rd Avenue, Suite 100
Foster City, CA 94404-4824
USA

Telephone +1 800-521-2109 / +1 650-349-1636

Fax +1 800-523-2109 / +1 650-349-3729

E-Mail info@finescience.com

Web finescience.com



Fine Science Tools GmbH

Vangerowstraße 14
69115 Heidelberg
Germany

Telephone +49 (0) 62 21 - 90 50 50

Fax +49 (0) 62 21 - 90 50 590

E-Mail europe@finescience.de

Web finescience.de

F · S · T®